

KISSLING | KISSLING Series 29

TE Internal #: K1060185 General Purpose Power Relay, DC, Monostable, 1 Form X SPST-NO-DM, 75 A Contact Rating, 18 VDC / 32 VDC Coil Voltage, KISSLING Series 29

View on TE.com >

Relays & Contactors > Electromechanical Relays > Power Relay, 75A, Standard, Monostable, DC



Relay & Contactor Type: General Purpose Power Relay

Current Type: DC

Coil Magnetic System: Monostable

Contact Arrangement: 1 Form X SPST-NO-DM

Contact Current Rating: 75 A

All Power Relay, 75A, Standard, Monostable, DC (19)

Features

Product Type Features

Relay & Contactor Type



General Purpose Power Relay

Configuration Features

Coil Special Features	Coil Suppression Diode		
Contact Number of Poles	1		
Contact Arrangement	1 Form X SPST-NO-DM		
Electrical Characteristics			
Coil Resistance	76 Ω		
Contact Current Rating	75 A		
Coil Voltage Rating	18 VDC, 32 VDC		
Contact Voltage Rating	28 VDC		
Coil Power Rating DC	10 W		
Contact Features			
Contact Material	Silver Alloy		
Mechanical Attachment			
Product Mounting Feature Type	Mounting Brackets		

29-014-12

General Purpose Power Relay, DC, Monostable, 1 Form X SPST-NO-DM, 75 A Contact Rating, 18 VDC / 32 VDC Coil Voltage, KISSLING Series 29



Product Mount Type	Chassis Mount
Dimensions	
Product Width	76 mm[2.99 in]
Product Length	62 mm[2.44 in]
Product Height	50 mm[1.96 in]
Operation/Application	
Current Type	DC
Coil Magnetic System	Monostable
Packaging Features	
Packaging Method	Carton
Other	
Contact Current Class	75 A
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions

China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (93.2% in 17071202736) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

29-014-12

General Purpose Power Relay, DC, Monostable, 1 Form X SPST-NO-DM, 75 A Contact Rating, 18 VDC / 32 VDC Coil Voltage, KISSLING Series 29



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




TE Part # CAT-AL6-KSPR2975 Power Relay, 75A, Standard, Monostable, DC

Also in the Series | KISSLING Series 29



Customers Also Bought

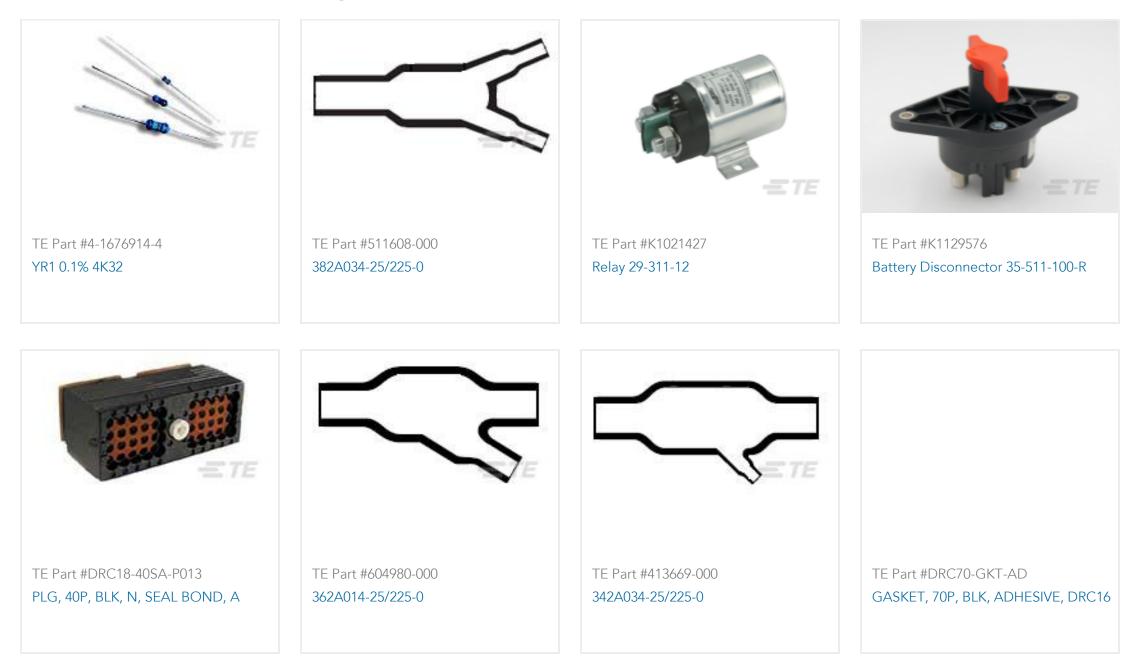

29-014-12

General Purpose Power Relay, DC, Monostable, 1 Form X SPST-NO-DM, 75 A Contact Rating, 18 VDC / 32 VDC Coil Voltage, KISSLING Series 29





Documents

Product Drawings Relay 29-014-12

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_29-014-12_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_29-014-12_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_29-014-12_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages KISSLING SINGLE POLE POWER RELAYS Series 29 / 75A

English