CONREVSMA006.031 <

TE Internal #: L9000254-01 RP-SMA Connector, Jack, 50 ohm, Threaded, 0 – 12.4 GHz, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder, Straight

View on TE.com >



Connectors > RF Connectors > Coax Connectors



RF Interface: **RP-SMA** RF Connector Style: **Jack** Impedance: **50** Ω RF Connector Coupling Mechanism: **Threaded** Operating Frequency: **0 – 12.4 GHz**

Features

Product Type Features

Connector Product Type	Connector Assembly
RF Interface	RP-SMA
RF Connector Style	Jack

Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
Configuration Features				
PCB Mount Orientation	Edge			
Number of Positions	1			
Number of Coaxial Contacts	1			
Electrical Characteristics				
Impedance	50 Ω			
Body Features				
Cable Connector Orientation	Straight			
Body Material	Brass			
Body Material Finish	Plated			
Body Plating Material	Nickel			
Contact Features				
RF Connector Center Contact Plating Material	Gold (Au)			

RP-SMA Connector, Jack, 50 ohm, Threaded, 0 – 12.4 GHz, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder, Straight



Operating Temperature Range-65 – 165 °C[-85 – 329 °F]Operation/ApplicationSignalCircuit ApplicationSignalOperating Frequency0 – 12.4 GHz	
Termination Method to Wire & CableSolderMechanical AttachmentFRF Connector Coupling MechanismThreadedConnector Mounting TypeBoard MountRF Contact Captivation MethodMechanicalDetentWithoutUsage ConditionsVithoutOperating Temperature Range-65 – 165 °C[-85 – 329 °F]Operating FrequencySignalOperating Frequency0 – 12.4 GHzPackaging Features	
Mechanical Attachment RF Connector Coupling Mechanism Threaded Connector Mounting Type Board Mount RF Contact Captivation Method Mechanical Detent Without Usage Conditions Operating Temperature Range -65 – 165 °C[-85 – 329 °F] Operation/Application Signal Operating Frequency 0 – 12.4 GHz	
RF Connector Coupling MechanismThreadedConnector Mounting TypeBoard MountRF Contact Captivation MethodMechanicalDetentWithoutUsage ConditionsOperating Temperature Range-65 - 165 °C[-85 - 329 °F]Operation/ApplicationCircuit ApplicationSignalOperating Frequency0 - 12.4 GHzPackaging Features	
Connector Mounting TypeBoard MountRF Contact Captivation MethodMechanicalDetentWithoutUsage Conditions-65 – 165 °C[-85 – 329 °F]Operating Temperature Range-65 – 165 °C[-85 – 329 °F]Operation/ApplicationSignalCircuit ApplicationSignalOperating Frequency0 – 12.4 GHzPackaging FeaturesSignal	
RF Contact Captivation Method Mechanical Detent Without Usage Conditions -65 – 165 °C[-85 – 329 °F] Operating Temperature Range -65 – 165 °C[-85 – 329 °F] Operation/Application Signal Operating Frequency 0 – 12.4 GHz Packaging Features Signal	
Detent Without Usage Conditions -65 – 165 °C[-85 – 329 °F] Operating Temperature Range -65 – 165 °C[-85 – 329 °F] Operation/Application Signal Circuit Application Signal Operating Frequency 0 – 12.4 GHz Packaging Features Vertex	
Usage Conditions Operating Temperature Range -65 – 165 °C[-85 – 329 °F] Operation/Application -65 – 165 °C[-85 – 329 °F] Circuit Application Signal Operating Frequency 0 – 12.4 GHz Packaging Features	
Operating Temperature Range-65 – 165 °C[-85 – 329 °F]Operation/ApplicationSignalCircuit ApplicationSignalOperating Frequency0 – 12.4 GHzPackaging Features	
Operation/Application Signal Circuit Application Signal Operating Frequency 0 – 12.4 GHz Packaging Features Signal	
Circuit Application Signal Operating Frequency 0 – 12.4 GHz Packaging Features	
Operating Frequency 0 – 12.4 GHz Packaging Features	
Packaging Features	
Packaging Quantity 100	
Packaging Method Bulk	

Other


Lockwasher Material	Brass					
Dielectric Material	PTFE					
Product Compliance						
For compliance documentation, visit the product page on TE.com>						
EU RoHS Directive 2011/65/EU	Compliant with Exemptions					
EU ELV Directive 2000/53/EC	Not Yet Reviewed Restricted Materials Above Threshold					
China RoHS 2 Directive MIIT Order No 32, 2016						
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025					
	(247) Not Yet Reviewed					
Halogen Content	Not Yet Reviewed for halogen content					
Solder Process Capability	Not reviewed for solder process capability					
Product Compliance Disclaimer						
This information is provided based on reasonable inquiry of our suppliers an based on the information they provided. This information is subject to change						


RP-SMA Connector, Jack, 50 ohm, Threaded, 0 – 12.4 GHz, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder, Straight



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.


Compatible Parts

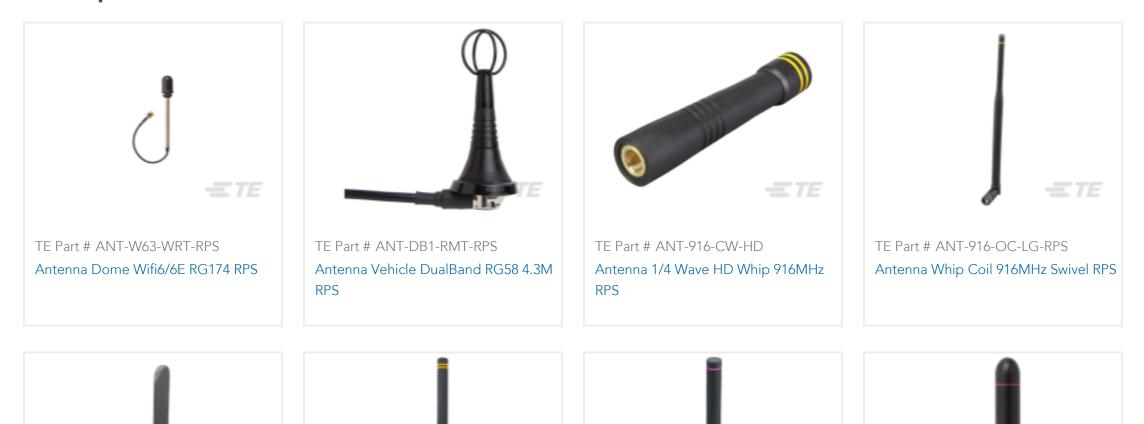

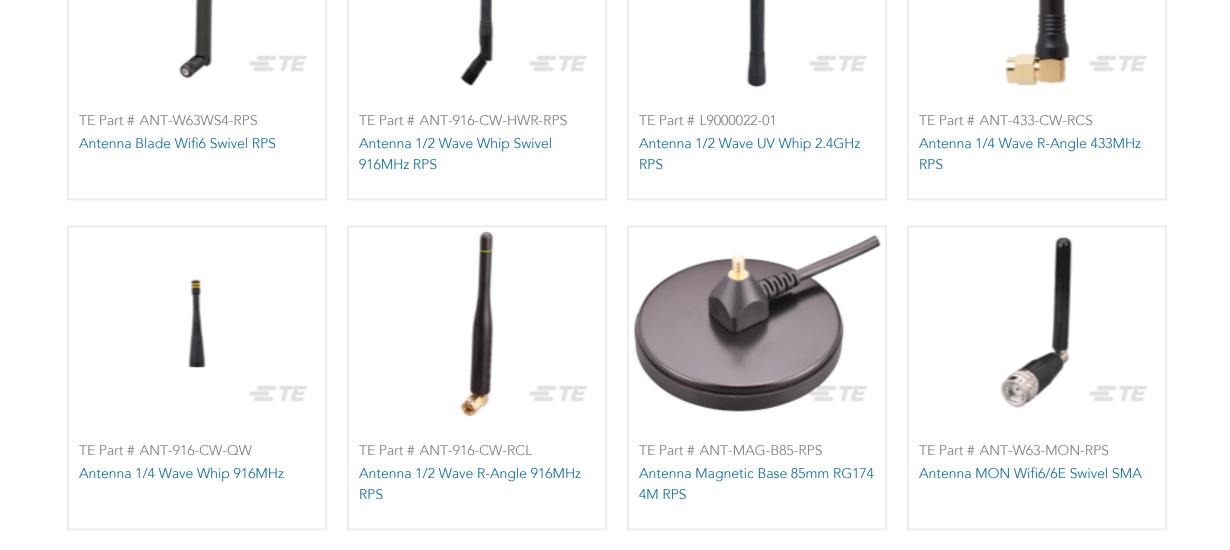


RP-SMA Connector, Jack, 50 ohm, Threaded, 0 – 12.4 GHz, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder, Straight



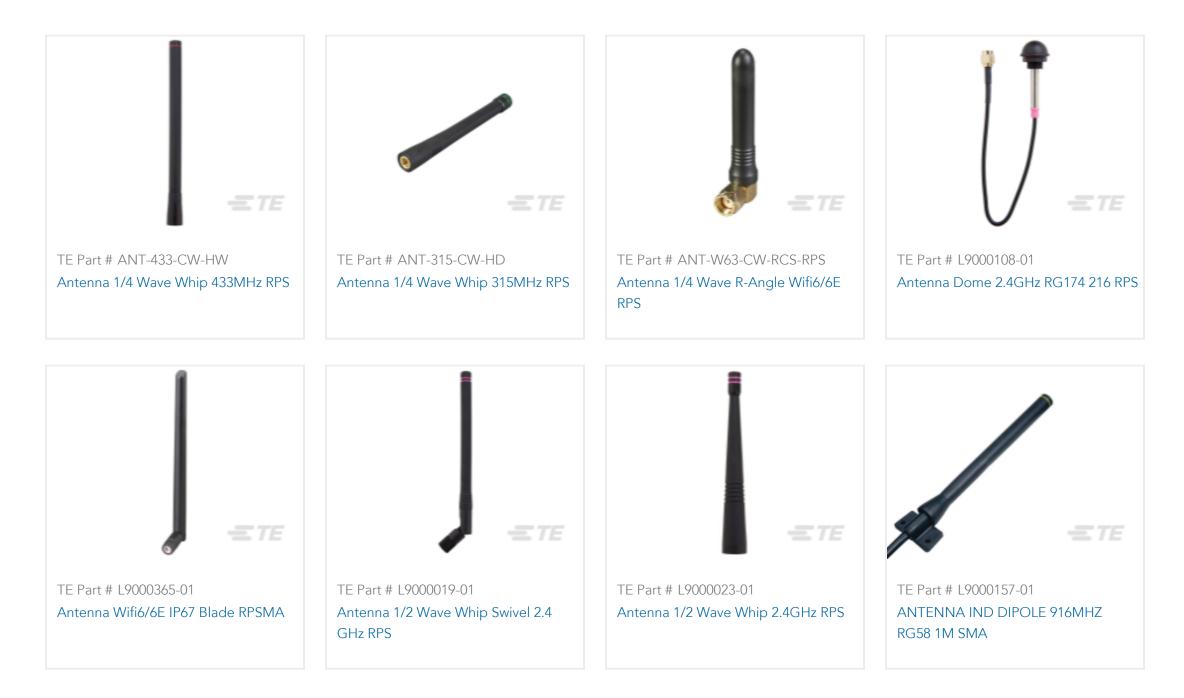

Customers Also Bought



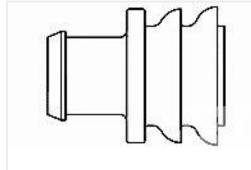

TF Part #281934-2



TF Part #CAT-D48-ST273



TE Part #CAT-D487-W416

AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING	SINGLE WIRE SEAL	DEUTSCH Solid Contacts	Wedgelocks: DEUTSCH DT
	ETE		
TE Part #DT06-2S PLG, 2P, GRY, N	TE Part #DT04-2P REC, 2P, GRY, N		

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_L9000254-01_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_L9000254-01_B.3d_igs.zip

English

& For support call+1 800 522 6752

RP-SMA Connector, Jack, 50 ohm, Threaded, 0 – 12.4 GHz, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder, Straight



Customer View Model

ENG_CVM_CVM_L9000254-01_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages RP-SMA FEMALE EDGE MULTI-MOUNT FOR 0.031INCH THICK BOARD

English