




Heat Shrink Tubing > RNF-150 Heat Shrink Tubing

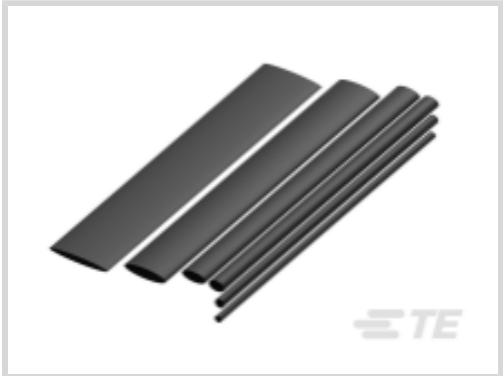

Tubing Product Type: **Heat Shrink Tubing**

Primary Product Color: **Black**

Shrink Ratio: **2:1**

Wall Type: **Single Wall**

Recovered Inside Diameter (Max): **3.18 mm [.125 in]**

[All RNF-150 Heat Shrink Tubing \(27\)](#)

Features

Product Type Features

Tubing Product Type	Heat Shrink Tubing
Wall Type	Single Wall

Electrical Characteristics

Operating Voltage (Max)	.6 kV
-------------------------	-------

Body Features

Fluid Type	Aviation Fuel, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Black
Shrink Ratio	2:1
Primary Product Material	Crosslinked Fluoropolymer
Flexibility	Flexible

Dimensions

Recovered Wall Thickness (Nominal)	.3 mm[.012 in]
Recovered Wall Thickness (Tolerance)	.15 mm[.006 in]
Recovered Inside Diameter (Max)	3.18 mm[.125 in]
Expanded Inside Diameter (Min)	6.35 mm[.25 in]

Usage Conditions



Shrink Temperature (Min)	110 °C
Tubing Flammability Type	Highly Flame-Retardant
Operating Temperature Range	-55 – 150 °C
Recovery Temperature	150 °C

Operation/Application

Mechanical Resistance	Abrasion, Fluids, Mechanical Damage, Strain Relief
-----------------------	--

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Spool
------------------	-------

Other

Meets Low Outgassing Requirements	No
Product Source	Czech Republic

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits




as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

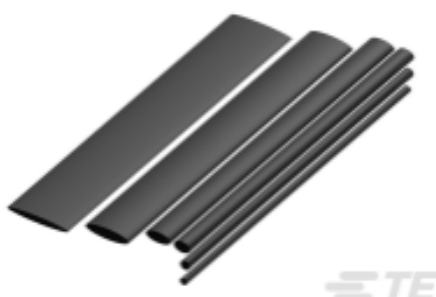

TE Part # CAT-HST-RNF150
RNF-150 Heat Shrink Tubing

Also in the Series | RAYCHEM RNF-150

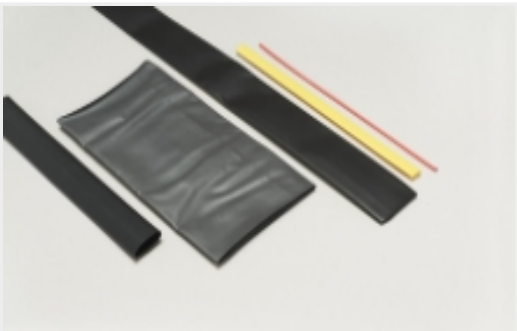


Heat Shrink Tubing(27)




Single Wall Tubing(27)


Customers Also Bought

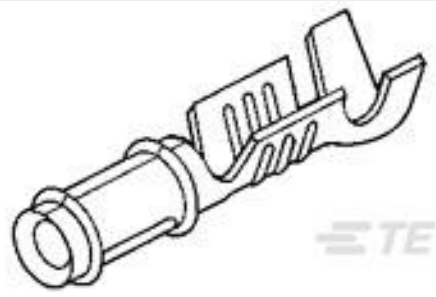

TE Part #60940-1
.058 PIN REC 24-20 010TPPHBZ




TE Part #C58158-000
WP-089047-10-9

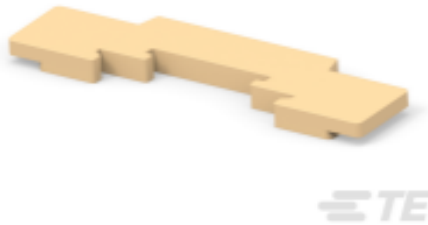

TE Part #1SNA199394R2300
INH3




TE Part #DT06-2S-E003
PLG, 2P, GRY, N, CAP

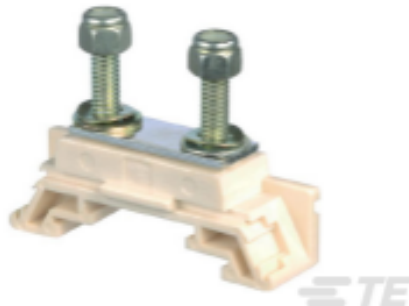

TE Part #1SNA295012R1700
HD16/14.FF5.21.3



TE Part #1SNA295430R2300
SCHD5

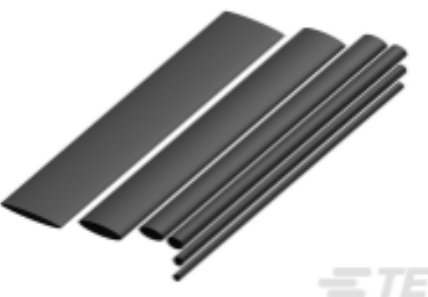

TE Part #CAT-HST-RNF150
RNF-150 Heat Shrink Tubing



TE Part #NB18084001
RNF-100-1-1/4-BK-SP



Documents

Product Drawings

RNF-150-1/4-0-SP

English

Datasheets & Catalog Pages

RNF-150 Pages from 9-1773447-9

English

Product Specifications

Application Specification

English