

## RAYCHEM | RAYCHEM SCL

TE Internal #: NB46152001 Heat Shrink Tubing, Black, 3:1, Dual Wall, Shrinks To 7.95 mm [.313 in], Irradiated Modified Polyolefin, 19.05 mm [.75 in] Expanded Inside

#### View on TE.com >

Heat Shrink Tubing > SCL Heat Shrink Tubing



Tubing Product Type: Heat Shrink Tubing Primary Product Color: Black

Shrink Ratio: 3:1

Wall Type: Dual Wall

Recovered Inside Diameter (Max): 7.95 mm [.313 in ]

All SCL Heat Shrink Tubing (59)

## Features

## Product Type Features

Tubing Product Type

**Electrical Characteristics** 



Heat Shrink Tubing

### Dual Wall

Operating Voltage (Max)	.6 kV
Body Features	
Fluid Type	Aviation Fuel, Brake Fluid, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Black
Shrink Ratio	3:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Rigid
Dimensions	
Recovered Wall Thickness (Nominal)	1.65 mm[.065 in]
Product Length	1220 mm[48.03 in]
Recovered Wall Thickness (Tolerance)	.35 mm[.014 in]
Recovered Inside Diameter (Max)	7.95 mm[.313 in]

## NB46152001

Heat Shrink Tubing, Black, 3:1, Dual Wall, Shrinks To 7.95 mm [.313 in], Irradiated Modified Polyolefin, 19.05 mm [.75 in] Expanded Inside



Expanded Inside Diameter (Min)	19.05 mm[.75 in]
Tubing Size Range	7.95 – 19.05 mm[.313 – .75 in]
Usage Conditions	
Resistance Properties	Immersion Protection, Moisture, Splash Protection
Shrink Temperature (Min)	125 °C
Tubing Flammability Type	Non-Flame-Retardant
Operating Temperature Range	-55 – 110 °C
Recovery Temperature	135 °C
Operation/Application	
Mechanical Resistance	Abrasion, Fluids, Mechanical Damage, Strain Relief, Vibration
Product Availability	
Applicable Region	Global
Packaging Features	
Packaging Method	Bag & Box
Other	
Meets Low Outgassing Requirements	No

#### 

Product Source

Czech Republic

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

**C** For support call+1 800 522 6752

04/15/2025 12:30AM | Page 2

### NB46152001

Heat Shrink Tubing, Black, 3:1, Dual Wall, Shrinks To 7.95 mm [.313 in], Irradiated Modified Polyolefin, 19.05 mm [.75 in] Expanded Inside



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# **Compatible Parts**



TE Part # EG1114-000 CV1981-ST-230V1600W-EU

## Also in the Series **RAYCHEM SCL**

Dual Wall Tubing(58)	Heat Shrink Tubing(59)


# **Customers Also Bought**



## NB46152001

Heat Shrink Tubing, Black, 3:1, Dual Wall, Shrinks To 7.95 mm [.313 in], Irradiated Modified Polyolefin, 19.05 mm [.75 in] Expanded Inside



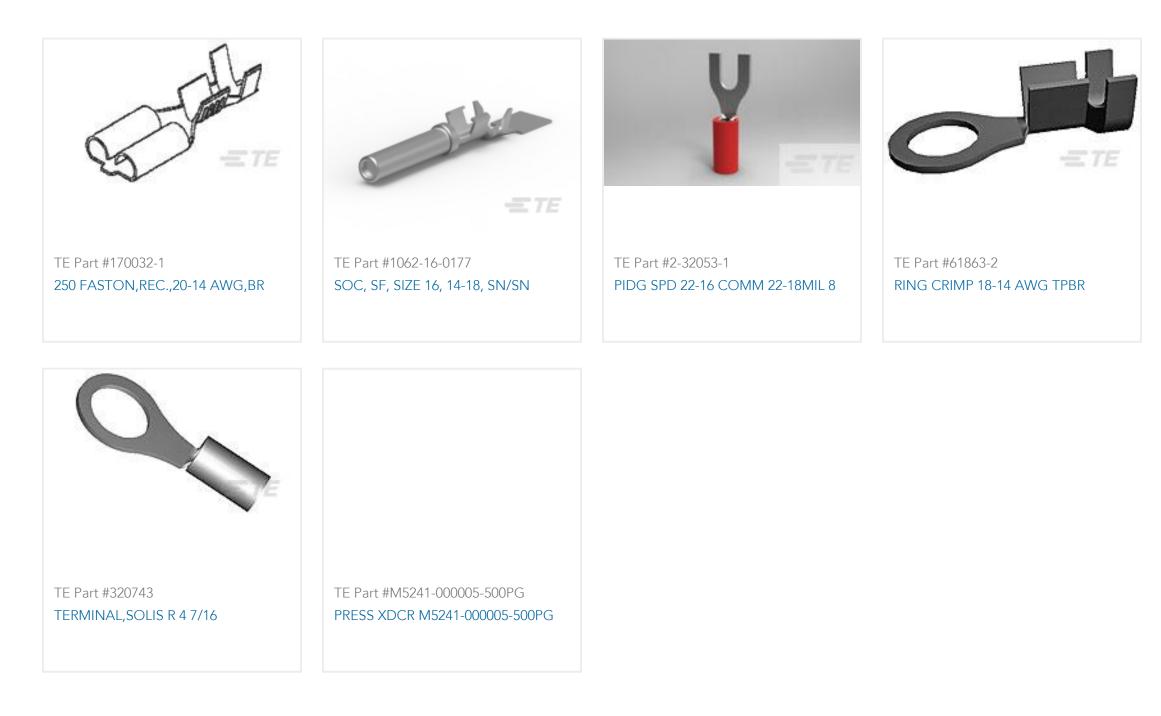

## Documents

**Product Drawings** SCL-3/4-0-STK-CS34568

English

Datasheets & Catalog Pages SCL Tubing

English

Product Specifications Application Specification English