

MEAS | MEAS SP TE Internal #: SPD-25-3 TE Internal Description: STRING POT 25 INCH RANGE View on TE.com >



Sensors > Position Sensors > Potentiometer Sensors > Cable Actuated Position Sensors



Position Sensor Product Type: SP Series, String Pots

Full Stroke Range: 101.6 – 1270 mm [4 – 50 in]

Output Signal Type: 0 – 10 VDC, 4 – 20 mA

Accuracy: ±.25 % of FS

Repeatability: .02 % of FS

Features

Product Type Features

Position Sensor Product Type

Body Features

Case Material

SP Series, String Pots

Polycarbonate + Stainless Mounting Bracket

Dimensions

Full Stroke Range	101.6 – 1270 mm[4 – 50 in]									
Usage Conditions										
Accuracy	±.25 % of FS									
Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]									
Operation/Application										
Output Signal Type	0 – 10 VDC, 4 – 20 mA									
Industry Standards										
IP Rating	IP67									
Hazardous Area Approval	None									
Other										
Repeatability	.02 % of FS									
Encoder Drive	No									
Measuring Cable	Nylon-Coated Stainless Steel									



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Pb (1.2% in Component a) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.			
Halogen Content	Not Yet Reviewed for halogen content			
Solder Process Capability	Not reviewed for solder process capability			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | MEAS SP

STRING POT 25 INCH RANGE





Customers Also Bought

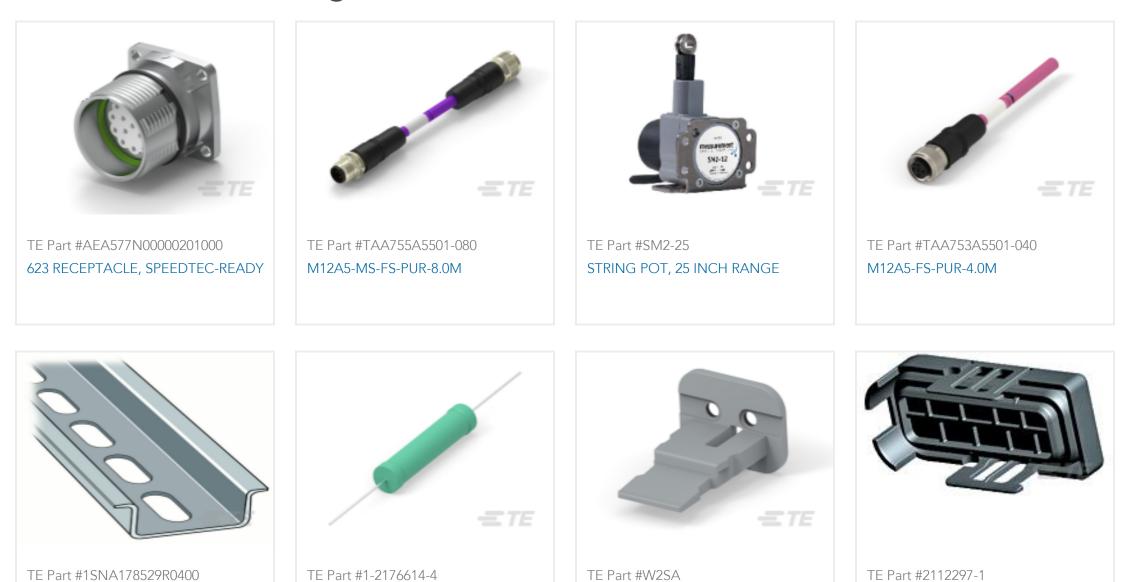

PR50	EP 10W (SS) 3R6 5% BULK BOX	WEDGE LOCK, 2P, PLG, GRY, STD,	PROTECTION CAP, GROUP E, ASSY
		DT, A	



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_SPD-25-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_SPD-25-3_A.3d_igs.zip

SPD-25-3



English

Customer View Model ENG_CVM_CVM_SPD-25-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

SPD

English