




Connectors > PCB Connectors > PCB Headers & Receptacles > DEUTSCH Strike Headers

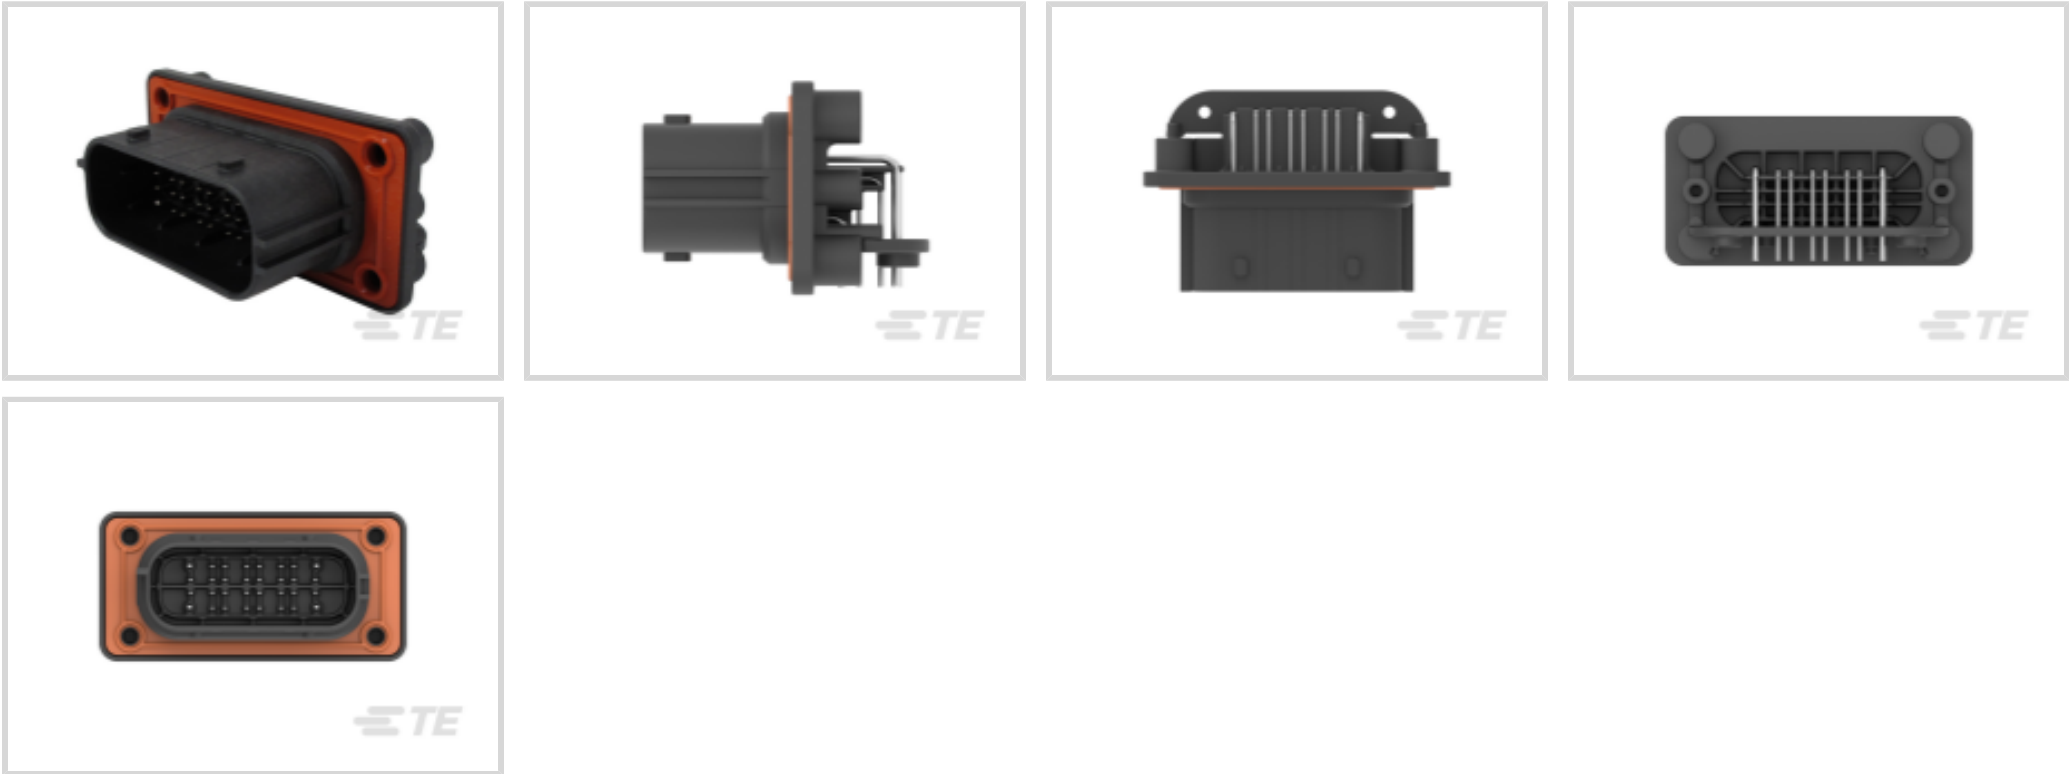

PCB Connector Type: **PCB Mount Header**
PCB Mount Orientation: **Right Angle**
Connector System: **Wire-to-Board**
Number of Positions: **32**
Number of Rows: **4**

[All DEUTSCH Strike Headers \(10\)](#)

Features

Product Type Features

Mixed & Hybrid Header	Yes
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Connector Product Type	Connector Assembly

Configuration Features

Number of Signal Positions	32
Number of Sections	1
PCB Mount Orientation	Right Angle
Number of Positions	32



Number of Rows	4
----------------	---

Electrical Characteristics

Operating Voltage	250 VDC
Voltage Rating (Max)	250 VDC
Nominal Voltage Architecture	12 V, 24 V

Body Features

Connector & Keying Code	A
Primary Product Color	Black

Contact Features

Mating Pin Diameter	1.02 mm, 1.59 mm [.04 in] [.063 in]
Contact Size	Size 16, Size 20
Contact Mating Area Plating Material	Tin (Sn)
Contact Type	Pin
Contact Current Rating (Max)	7.5 A, 13 A

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Panel Mount Feature	With
Mating Retention Type	Locking Interface
Mounting Holes	With
Mating Retention	With
Mating Alignment Type	Keyed
PCB Mount Retention Type	Mounting Screw
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Panel Mount
Mating Alignment	With

Housing Features

Centerline (Pitch)	3 mm, 3.4 mm, 5.8 mm, 6.1 mm [.118 in] [.134 in] [.228 in] [.24 in]
--------------------	---

Dimensions

Connector Width	82.04 mm [3.23 in]
-----------------	--------------------



PCB Thickness (Recommended)	.78 – 3.18 mm [.031 – .125 in]
Connector Length	53.59 mm [2.11 in]
Profile Height from PCB	34.7 mm [1.366 in]

Usage Conditions

Operating Temperature (Max)	125 °C [257 °F]
Operating Temperature Range	-55 – 125 °C [-67 – 257 °F]

Operation/Application

Shielded	No
Circuit Application	Power & Signal

Industry Standards

IP Rating	Not Tested
UL Flammability Rating	Not Tested

Packaging Features

Packaging Quantity	48
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # SRK06-MDA-32A-001
PLG, 32P, BLK, E, A

TE Part # DT-RT1
EXT TOOL, FRONT RELEASE

TE Part # SRK13-MDB-32A-001
HDR, 32P, BLK, RA, SN/NI/CU, B

Also in the Series | STRIKE

Automotive Headers(10)

Automotive Housings(20)

PCB Headers & Receptacles(10)

Rectangular Power Connectors(10)

Wire-to-Board Headers & Receptacles
(10)

Customers Also Bought

TE Part #212630-4
MMATE PIN HDR ASSY,19P LF

TE Part #2386211-3
2POS,PIN DIA 1.0,HDR ASSY,90DEG, COD C

TE Part #7-1437652-3
6PCV-04-1268=W/PP

TE Part #2439715-5
4P,COAX,HDR ASSY,180DEG,COD A (BLACK)





TE Part #1437661-1
11S-SOCKET=11S SOCKET



TE Part #SRK13-MDB-32A-001
HDR, 32P, BLK, RA, SN/NI/CU, B

TE Part #2-2338212-1
4P PLUG SOCKET ASSY, BLIND CAP
KEY A

TE Part #1-539415-1
Gear Motor

TE Part #1832748-1
AFSN-13Z-21



TE Part #1437145-6
FSN-23Z-3

Documents

Product Drawings

HDR, 32P, BLK, RA, SN/NI/CU, A

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_SRK13-MDA-32A-001_99_c-srk13-mda-32a-001-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_SRK13-MDA-32A-001_99_c-srk13-mda-32a-001-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_SRK13-MDA-32A-001_99_c-srk13-mda-32a-001-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

TERMINALS AND CONNECTORS

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

