



Connectors > Contacts > Connector Contacts



Contact Type: **Pin**
Contact Mating Area Plating Material: **Silver (Ag)**
Wire Contact Termination Area Plating Material: **Silver**
Operating Voltage: **250 VAC**
Compatible With Wire & Cable Type: **Discrete Wire**

Features

Product Type Features

Discrete Wire Type	Solid or Stranded
Sealable	No

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Contact Resistance	5 mΩ
Operating Voltage	250 VAC

Contact Features

Contact Shape & Form	Round
Contact Underplating Material	Copper
Contact Orientation	Straight
PCB Contact Termination Area Plating Material	Silver
Barrel Type	Closed
Contact Mating Area Plating Material Finish	Bright



Contact Mating Area Plating Material Thickness	2 µm[78.74 µin]
Contact Length	25 mm[.98 in]
Contact Type	Pin
Contact Mating Area Plating Material	Silver (Ag)
Wire Contact Termination Area Plating Material	Silver
Contact Base Material	Brass
Contact Current Rating (Max)	10 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	.14 – .37 mm²
-----------	---------------

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Compatible With Wire Base Material	Copper
Circuit Application	Power & Signal

Packaging Features

Packaging Method	Box
Packaging Quantity	100

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (3.7% in 74018819)



Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # T3100000001-000
CRIMPBOX-0.14/4.0



TE Part # T2020002002-000
CDF-0.3



TE Part # T2080122101-002
HQ-012-M,W/O CODING PIN



TE Part # T3100000022-000
RPC-M23-T-B



TE Part # T2030722101-000
HDD-072-M


Also in the Series | [HDC HDD](#)



Connector Contacts(24)



Power Contacts(24)

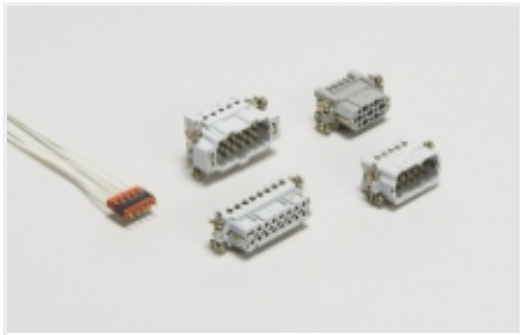

Rectangular Contact Inserts(15)

Customers Also Bought




TE Part #1-2372488-3
DYNAMIC 1100D HDR ASSY H 26PX
Pre-TIN



TE Part #T2040052060-000
HMF-6.0



TE Part #1-2390471-3
DYNAMIC D1100S 16POS. V-TYPE X
Tin-pla

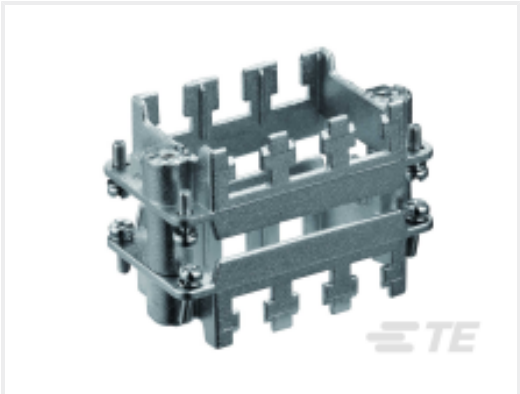

TE Part #T2070104001-000
H10BN-T3



TE Part #1-1871315-3
D1100D HDR ASSY V 26P XBLACK Pre-Tin




TE Part #T2080122101-000
HQ-012-M



TE Part #T2040001060-000
CMM-6.0



TE Part #T2111122201-000
HMN-012-F

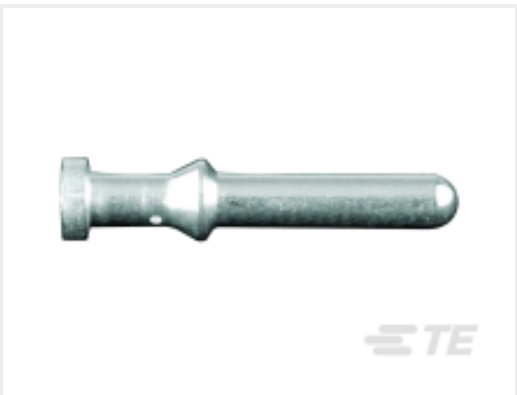

TE Part #T2040001100-000
CMM-10



TE Part #1-1939761-4
HDR ASSY (H-TYPE) 4POS X-KEY TIN

Documents

Product Drawings

CDM-0.3

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_T2020001002-000_A.2d_dxf.zip

T2020001002-000

Pin Contact, Silver (Ag), 250 VAC, Discrete Wire, 26 – 22 AWG, .14 – .37 mm² Wire, Crimp, Brass, Power & Signal, -40 – 125 °C [-40 – 257 °F], HDC HDD



English

Customer View Model

[ENG_CVM_CVM_T2020001002-000_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_T2020001002-000_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Heavy Duty Connectors

English

HEAVY DUTY CONNECTORS

English

HEAVY DUTY CONNECTORS

Japanese

Product Specifications

Application Specification

English