T4011019041-000 - ACTIVE

M8 Connector

TE Internal #: T4011019041-000 4 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, Nickel, M8 Connector

View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors > M8 Field Installable



Number of Positions: 4

Connector System: Cable-to-Cable

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 3A

All M8 Field Installable (16)



Features

Product Type Features

Assembly Requirement	Factory Assembled
Circular Connector Shell Type	Metal-Shell
Connector Product Type	Connector Assembly
Assembly Type	Electrical Connector
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Plug
Shell Type	Metal
Configuration Features	
Factory Installed Backshell	With
Number of Positions	4
Number of Power Positions	0

C For support call+1 800 522 6752

4 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, Nickel, M8 Connector



Number of Signal Positions	4
Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	30 VDC
Body Features	
O-Ring Material	Silicone
Environmental Protection	IP67
Environmental Protection Type	Elastomer Sealed
Primary Product Color	Black
Peripheral Seal Material	Silicone
Shell Plating Material	Nickel
Shell Base Material	Copper Alloy
Circular Connector Insulation Material Type	Polyamide 66 GF25
Hermetically Sealed	Yes
Contact Features	
Contact Current Rating (Max)	3 A
Reverse Gender	Yes
Circular Connector Contact Type	Pin
Mechanical Attachment	
Mating Retention Type	Threaded Coupling
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Polarization Code	A
Mating Alignment Type	Keyed
Housing Features	
Circular Connector Shell Size	12
Dimensions	
Wire Size	24 – 26 AWG
Usage Conditions	
IP Dust Sealing Level	6
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

C For support call+1 800 522 6752

4 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, Nickel, M8 Connector



Operation/Application

Durability Rating	100 Cycles
Circuit Application	Signal
Shielded	Yes
Industry Standards	
UL Flammability Rating	UL 94HB
Other	
Field Serviceable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247)

Halogen Content

SVHC > Threshold:

Pb (4% in 74024580)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

4 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, Nickel, M8 Connector



Compatible Parts

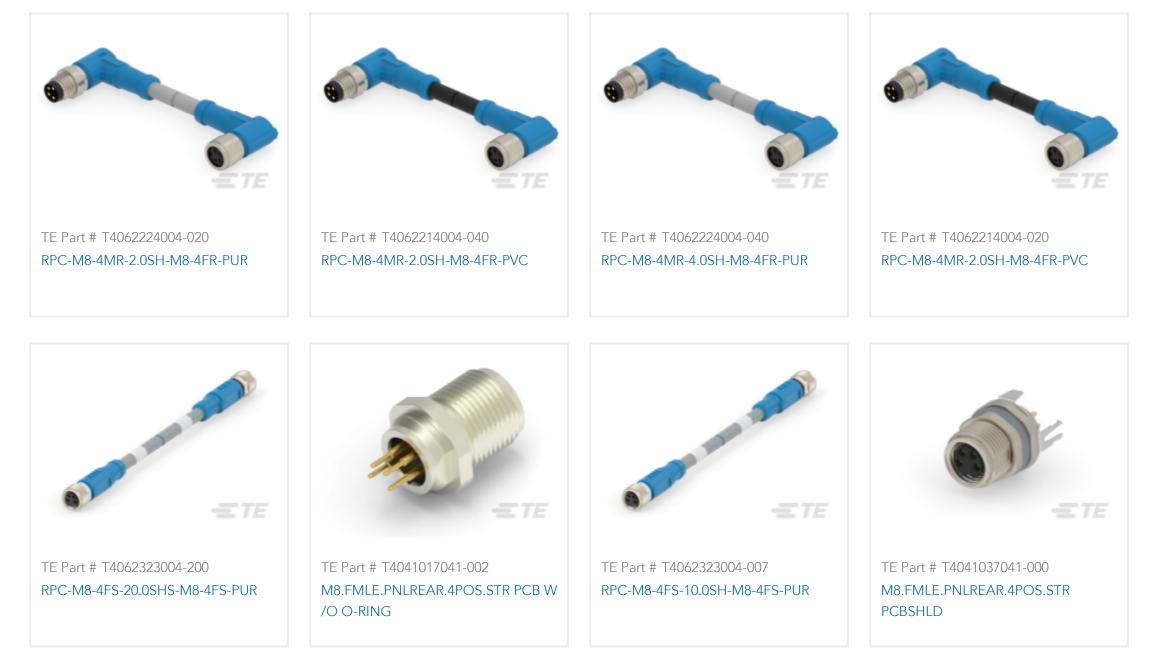




TE Part # T4041037041-001



TE Part # T4010019041-000 M8,SCREW, FEMALE,S,SHIELD,4P, GOLD




Also in the Series | M8 Connector

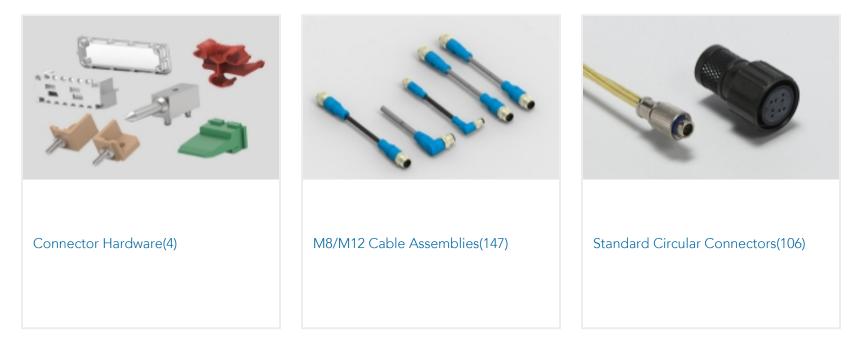

Customers Also Bought

4 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, Nickel, M8 Connector



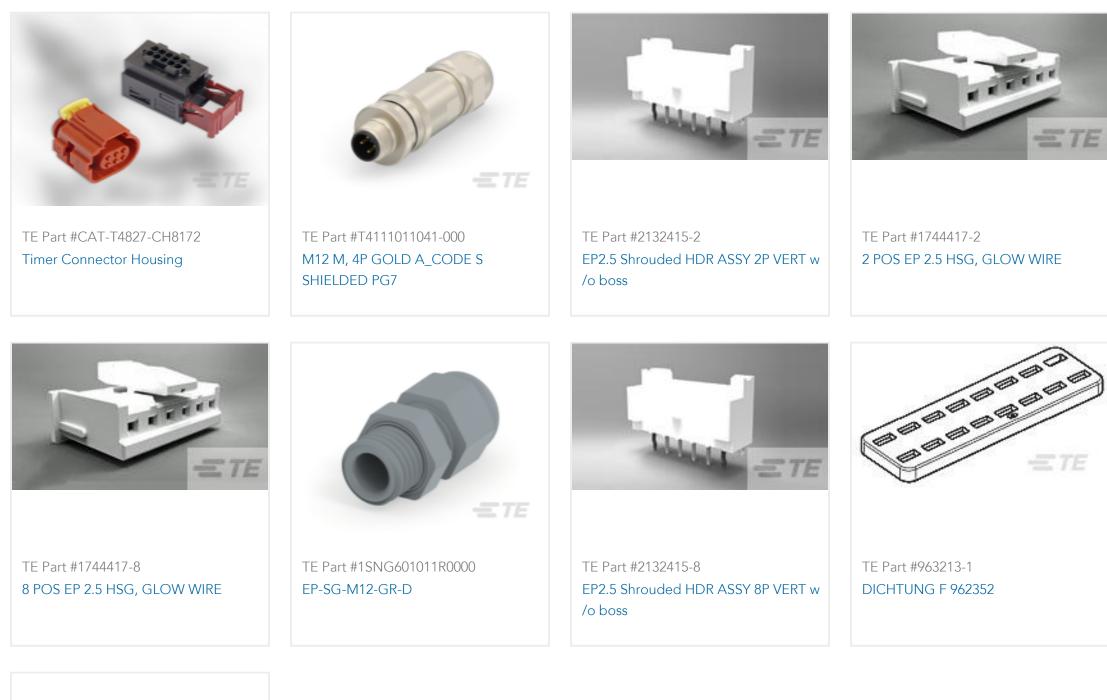



Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_T4011019041-000_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_T4011019041-000_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_T4011019041-000_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

M8 / M12 Connector System Catalog

Japanese

4 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, Nickel, M8 Connector



Product Specifications Application Specification English Application Specification English Agency Approvals UL English