



M12 Connector

TE Internal #: T4145535041-001

4 Position Circular Connector, Wire-to-Panel, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, Copper Alloy, D Code, M12 Connector

[View on TE.com >](#)

Connectors > Circular Connectors > Standard Circular Connectors > M12 Panel Mount PCB



Number of Positions: 4

Connector System: **Wire-to-Panel**

Sealable: **Yes**

Connector & Contact Terminates To: **Wire & Cable**

Contact Current Rating (Max): **4 A**

[All M12 Panel Mount PCB \(103\)](#)

Features

Product Type Features

Assembly Requirement	Factory Assembled
Circular Connector Shell Type	Metal-Shell
Connector Product Type	Connector Assembly
Assembly Type	Electrical Connector
Connector System	Wire-to-Panel
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Metal

Configuration Features

Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	4



Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	250 VDC
Body Features	
O-Ring Material	Silicone
Environmental Protection	IP67
Environmental Protection Type	Elastomer Sealed
Primary Product Color	Black
Peripheral Seal Material	Silicone
Shell Plating Material	Nickel
Shell Base Material	Copper Alloy
Circular Connector Insulation Material Type	Polyamide GF
Hermetically Sealed	Yes
Contact Features	
Contact Current Rating (Max)	4 A
Reverse Gender	Yes
Circular Connector Contact Type	Socket
Termination Features	
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
Mating Retention Type	Threaded Coupling
PCB Mount Retention	With
Panel Mount Feature Type	Screw Nut
Mating Alignment	With
Connector Mounting Type	Panel Mount
Polarization Code	D
Mating Alignment Type	Keyed
Housing Features	
Circular Connector Shell Size	12
Dimensions	
Panel Thickness (Recommended)	2 – 3 mm [.079 – .118 in]



Usage Conditions

IP Dust Sealing Level	6
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

Operation/Application

Circuit Application	Signal
Shielded	No

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (3.7% in 74019790) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts







TE Part # T4111501041-000
M12,MALE,STRAIGHT,D CODE,4P,
PG7,GOLD

Also in the Series


M12 Connector

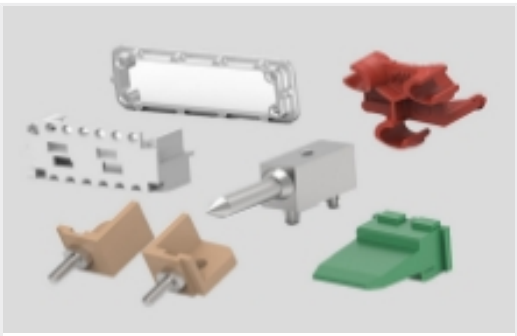


Connector Hardware(11)



Connector Seals & Cavity Plugs(4)

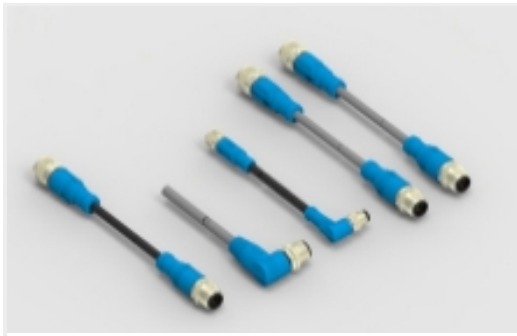


M8/M12 Cable Assemblies(230)




Standard Circular Connectors(793)


Customers Also Bought




TE Part #214787-E
EPSVA KS GDM4 EE 6 3,8 SN *
STROMVERSORG




TE Part #7-1625890-4
2W SM M/OX 5% 2K7




TE Part #178303-3
6-P POST HDR HORZ D-3100D .76

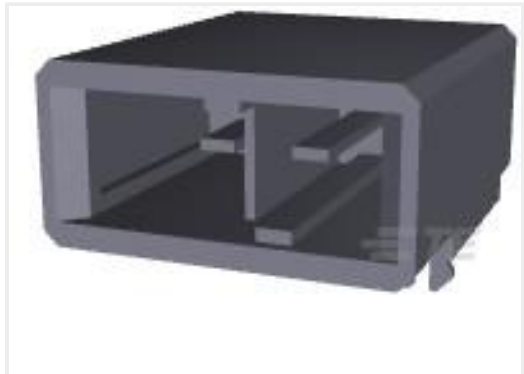


TE Part #1-179276-3
DYNAMIC 3200 HDR ASSY 2P H




TE Part #1SNG601124R0000
EP-SG-M40-LGR-C




TE Part #1241050-7
2x7P MOD II BREAK AWAY HDR,SMD,
BLISTER




TE Part #1-1241050-0
2x10P MOD II BREAK AWAY HDR,
SMD, BLISTER



TE Part #2271656-1
VERTICAL SMT TYPE I MINI IO REC S
CONN

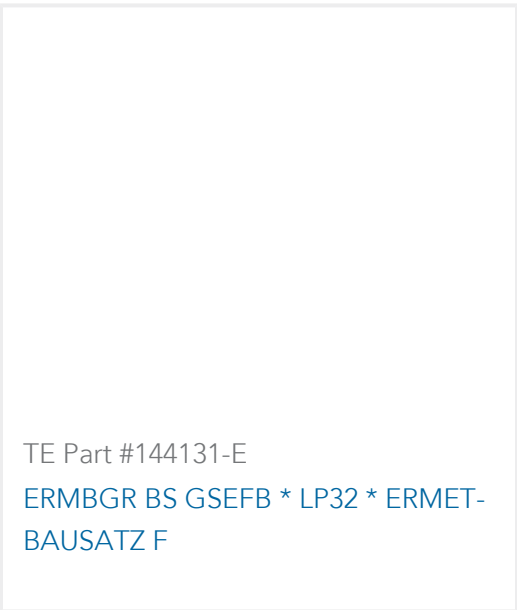

TE Part #144131-E
ERMBGR BS GSEFB * LP32 * ERMET-
BAUSATZ F

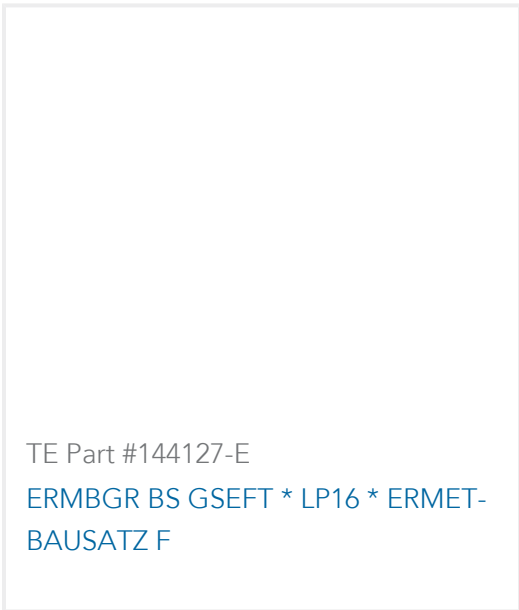

TE Part #144127-E
ERMBGR BS GSEFT * LP16 * ERMET-
BAUSATZ F



Documents

Product Drawings

M12 R/A F PNL STAMPED PIN D-CODE 4P SHLD

English

CAD Files

Customer View Model

ENG_CVM_CVM_T4145535041-001_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_T4145535041-001_B.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_T4145535041-001_B.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

M8 / M12 Connector System Catalog

English

M8 / M12 Connector System Catalog

Japanese

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL

English