



Sensors > Pressure Sensors > Pressure Transducers



Pressure Sensor Type: **Industrial Pressure Transducer**  
Pressure: **2.068 bar [ 30 psi ]**  
Pressure Type: **Absolute**  
Supply Voltage Range: **9 – 30 V**  
Output Signal Type: **4 – 20 mA**

Features

Product Type Features

Pressure Sensor Type	Industrial Pressure Transducer
Pressure Type	Absolute

Configuration Features

Electrical Connection	Packard
-----------------------	---------

Electrical Characteristics

Supply Voltage Range	9 – 30 V
----------------------	----------

Body Features

Port Material	316L
---------------	------

Dimensions

Product Height	57.15 mm[2.25 in]
Hex Width Across Flats	24 mm[.944 in]

Usage Conditions

Pressure	2.068 bar[30 psi]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Output Signal Type	4 – 20 mA
Proof Pressure Range	3X Rated



Pressure Accuracy	Down to $\pm .1\%$ FSO
-------------------	------------------------

Other

Sensor Options	Adhesive Label, No Snubber
Port Fitting	1/4 MNPT

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # U5254-000002-002BA  
PRESS XDCR U5254-000002-002BA



TE Part # U5254-000005-005PG  
PRESS XDCR U5254-000005-005PG



TE Part # U5254-000005-200PA  
PRESS XDCR U5254-000005-200PA



TE Part # U5254-000002-014BA  
PRESS XDCR U5254-000002-014BA

Also in the Series | MEAS U5200



Industrial Pressure Transducers(8)



Pressure Transducers(8)


Customers Also Bought



TE Part #114163-000  
CWT-9003



TE Part #1757823-8  
AMPLIMITE,ASY,PLUG,STD,90,ZN,2,CT

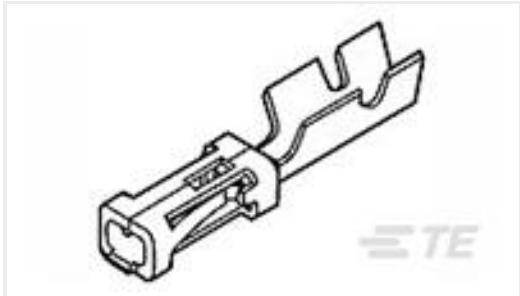

TE Part #86016-5  
MOD IV RECP LP




TE Part #U5254-000005-005PG  
PRESS XDCR U5254-000005-005PG



TE Part #GA5K3A1A  
DISCRETE 5K OHMS, +/-0.1C FROM 0C TO 70C




TE Part #CONBNC001  
BNC Jack 50 Ohm PCB Through Hole

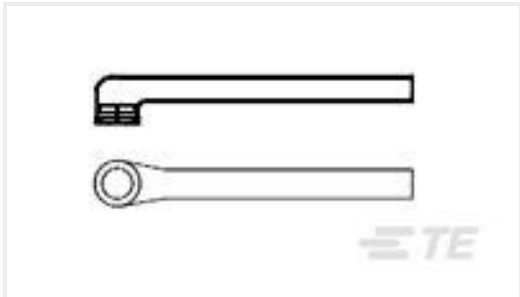


TE Part #296977-000  
222D211-4/42-0



TE Part #160013  
SOLIS 8 R M5

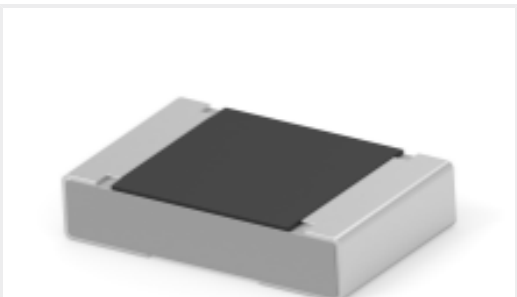

TE Part #9-2176529-4  
3504G 3A 475R 1% 1K RL



TE Part #2001140-03  
PACKARD INTERFACE CONN/CBL 3'

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_U5254-000005-030PA\_G.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_U5254-000005-030PA\_G.3d\_igs.zip

U5254-000005-030PA

Industrial Pressure Transducer, Absolute, 4 – 20 mA Output Signal, 3X Rated Proof Pressure Range, MEAS U5200



English

Customer View Model

[ENG\\_CVM\\_CVM\\_U5254-000005-030PA\\_G.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[U5200](#)

English