HDP24-18-14PE-L024 - ACTIVE

DEUTSCH | DEUTSCH HD, DEUTSCH HDP

TE Internal #: YHDP24-18-14PEL024 14 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings



Number of Positions: 14

Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Wire-to-Wire

Sealable: Yes

All DEUTSCH HDP20 Housings (357)



Features

Mixed & Hybrid Connector	No		
Connector Shape	Circular		
Connector & Housing Type	Housing for Male Terminals		
Connector System	Wire-to-Wire		
Sealable	Yes		
Primary Locking Feature	Integrated in Housing		
Connector & Contact Terminates To	Wire & Cable		
Configuration Features			
Configuration Features			
Configuration Features Blank Cavity Position	0		
	0 Wide Threaded Adapter		
Blank Cavity Position			

14 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Electrical Characteristics

Operating Voltage	250 VDC		
Nominal Voltage Architecture	12 V, 24 V, 48 V		
Body Features			
Cable Exit Angle	180°		
Primary Product Color	Black		
Contact Features			
Contact Size	Size 16		
Contact Type	Pin		
Mating Pin Diameter	1.59 mm[.063 in]		
Contact Current Rating (Max)	13 A		
Mechanical Attachment			
Strain Relief	Add By Accessory		
Terminal Position Assurance	No		
Mating Alignment Type	Guide Post		
Mating Alignment	With		
Connector Mounting Type	Cable Mount (Free-Hanging)		

Housing Features

Housing Material	PAGF				
Dimensions					
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]				
Product Width	44.45 mm[1.75 in]				
Product Length	41.53 mm[1.635 in]				
Connector Height	41.28 mm[1.625 in]				
Usage Conditions					
Operating Temperature (Max)	125 °C[257 °F]				
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]				
Operation/Application					
Circuit Application	Power				
Industry Standards					
IP Rating	IP67				
UL Flammability Rating	20mm Flame Test per Standard UL-94				

14 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Packaging Features

Packaging Quantity	1		
Packaging Method	Box		
Other			
Serviceable	Yes		
Connector Position Assurance Capable	No		

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 27519830213) Decamethylcyclopentasiloxane (D5) (.5% in

27519830213)Octamethylcyclotetrasiloxane (D4) (.5% in
27519830213)Article Safe Usage Statements:
Wash thoroughly after handling. Recycle if possible and dispose of the article by
following all applicable governmental regulations relevant to your geographic
location.Halogen ContentNot Low Halogen - contains Br or Cl > 900
ppm.Solder Process CapabilityNot reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

14 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Compatible Parts

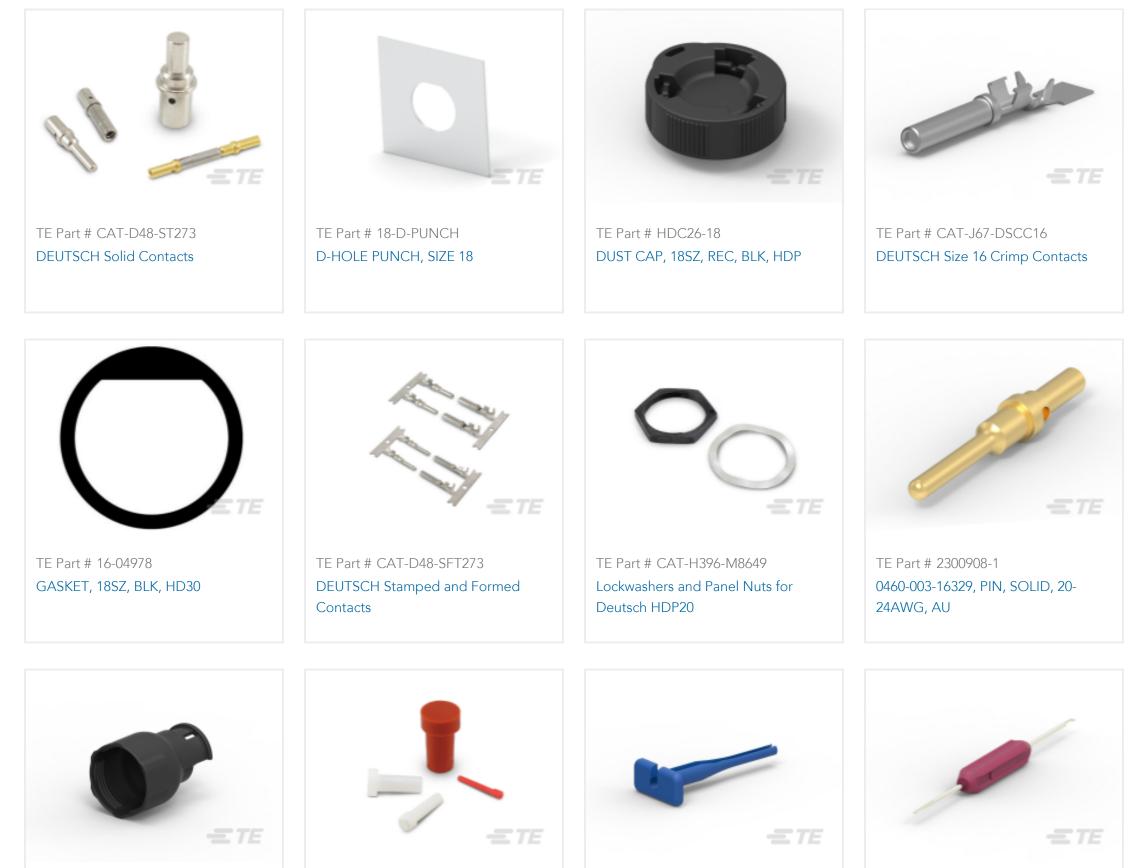

TE Part # 2428-025-1805

TE Part # CAT-D48-SP729


TE Part # 0411-336-1605

TE Part # DT-RT1

BRSHL, 185Z, BLR, ST, LUZ4, HDP	DEUTSCH Sealing Plugs	EXT TOOL, SIZE TO, TO-ZU AVVG, E,	EXTTOOL, FRONT RELEASE
		DRK BLU	




Also in the Series | DEUTSCH HD

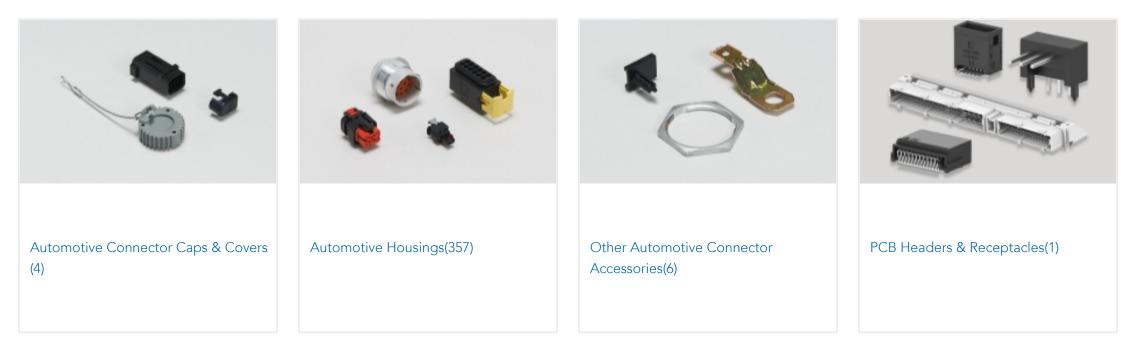


14 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



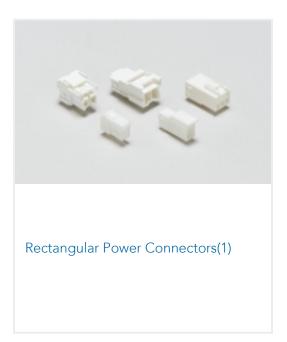

Also in the Series DEUTSCH HDP

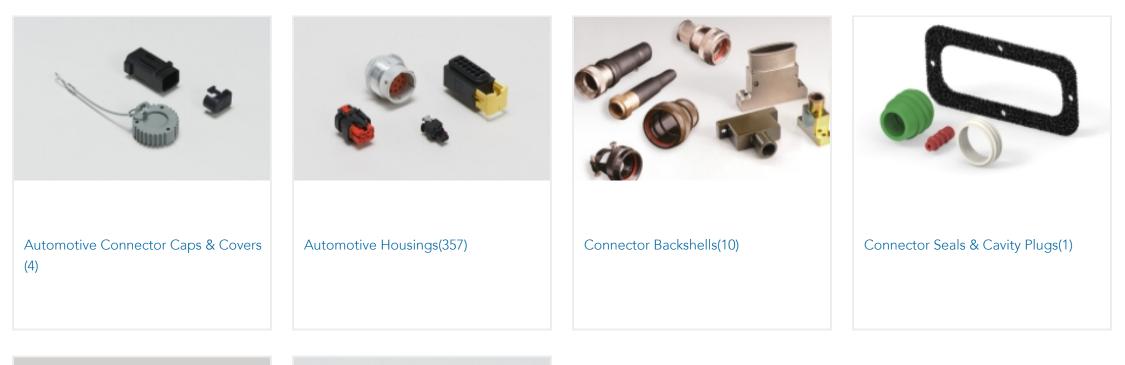




Insertion & Extraction Tools(11)

Other Automotive Connector Accessories(6)

Customers Also Bought

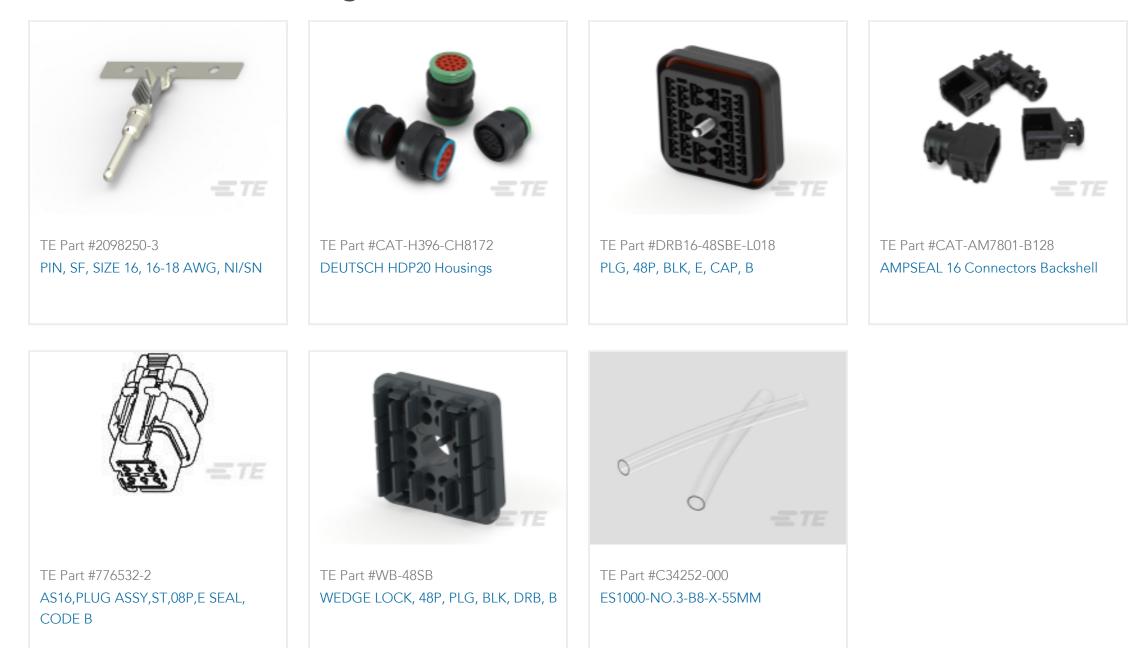

14 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_YHDP24-18-14PEL024_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_YHDP24-18-14PEL024_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_YHDP24-18-14PEL024_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the $\ensuremath{\mathsf{Terms}}\xspace$ and $\ensuremath{\mathsf{Conditions}}\xspace$ of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

5

Agency Approvals UL Report

English