HDP26-24-21SE-L024 ACTIVE



DEUTSCH | DEUTSCH HD, DEUTSCH HDP

TE Internal #: YHDP26-24-21SEL024

21 Position Housing, Housing for Female Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging),

Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings











Number of Positions: 21

Connector & Housing Type: Housing for Female Terminals Mating Pin Diameter: 1.59 mm, 2.39 mm [.063 in, .094 in]

Connector System: Wire-to-Wire

Sealable: Yes

All DEUTSCH HDP20 Housings (357)

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Circular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Connector Modification	Wide Threaded Adapter
Connector Seal Code	E Seal
Number of Positions	21



Electrical Characteristics		
Operating Voltage	250 VDC	
Nominal Voltage Architecture	12 V, 24 V, 48 V	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Black	
Contact Features		
Contact Size	Size 12, Size 16	

Socket

13 A, 25 A

1.59 mm, 2.39 mm[.063 in][.094 in]

Mechanical Attachment

Mating Pin Diameter

Contact Current Rating (Max)

Contact Type

Strain Relief	Add By Accessory
Terminal Position Assurance	No
Mating Alignment Type	Guide Post
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material PA GF

Dimensions

Compatible Insulation Diameter Range	1.35 – 3.05 mm, 2.46 – 4.01 mm[.097 – .158 in][.053 – .12 in]
Product Width	49.53 mm[1.95 in]
Product Length	38.3 mm[1.508 in]
Connector Height	49.53 mm[1.95 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power

Industry Standards

IP Rating	IP67



UL Flammability Rating	20mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	1
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part # HD30-24BT-90-BK BOOT, 24SZ, RA, BLK



TE Part # HD30-24BT BOOT, 24SZ, ST, GRY



TE Part # HD30-24BT-BK BOOT, 24SZ, ST, BLK



TE Part # CAT-J67-DSCC16
DEUTSCH Size 16 Crimp Contacts



TE Part # 1062-12-0144 SOC, SF, SIZE 12, 12-14, AU/SN



TE Part # 1062-12-0222 SOC, SF, SIZE 12, 10, NI/NI



TE Part # 1062-12-0166 SOC, SF, SIZE 12, 12-14, NI/SN



TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs



TE Part # 0411-336-1605 EXT TOOL, SIZE 16, 16-20 AWG, E, DRK BLU



TE Part # 0411-337-1205 EXT TOOL, SIZE 12, 12-14 AWG, E, ORG



TE Part # DT-RT1
EXT TOOL, FRONT RELEASE



TE Part # Y2428-024-24050000 BKSHL, 24SZ, BLK, ST, L024, HDP



Also in the Series | DEUTSCH HD




Automotive Connector Caps & Covers (4)



Automotive Housings(357)



Other Automotive Connector Accessories(6)

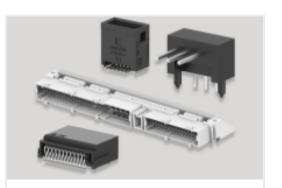


PCB Headers & Receptacles(1)







Also in the Series | DEUTSCH HDP

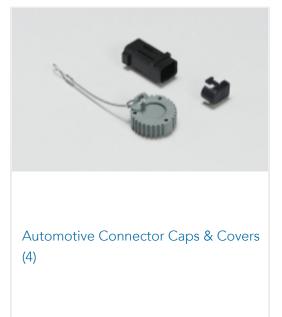



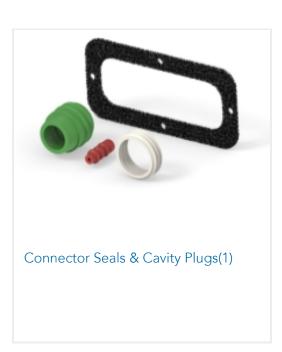

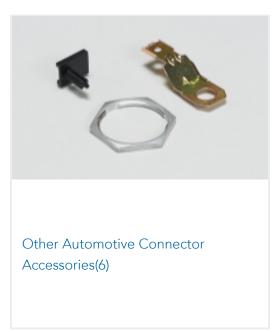

Customers Also Bought













Documents

Product Drawings
PLG, 21P, BLK, E, WTHD, 12/16, S

English

CAD Files

3D PDF

3D

21 Position Housing, Housing for Female Terminals, Wire-to-Wire, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Customer View Model

ENG_CVM_CVM_YHDP26-24-21SEL024_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_YHDP26-24-21SEL024_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_YHDP26-24-21SEL024_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English