DMC-M 20-22 PN 🗸 ACTIVE

DEUTSCH

TE Internal #: ZPF00000000015306 Insert for Contacts, Pin, 20 Pole Configuration, Crimp, Wire-to-Wire, Sealable, 26 – 22 AWG, .15 – .4 mm² Wire, 5 A, Power, Signal & High Speed Data

View on TE.com >



Connectors > Rectangular Connectors > Rectangular Contact Inserts



Rectangular Connector Insert Type: Insert for Contacts

Contact Type: Pin

Pole Configuration: 20

Termination Method to Wire & Cable: Crimp

Connector System: Wire-to-Wire

Features

Product Type Features

Connector & Contact Terminates To

Rectangular Connector Insert Type

Wire & Cable

Insert for Contacts

Connector System	Wire-to-Wire							
Sealable	Yes							
Configuration Features								
Number of Positions	20							
Body Features								
Primary Product Material	Composite							
Contact Features								
Contact Type	Pin							
Pole Configuration	20							
Contact Current Rating (Max)	5 A							
Termination Features								
Termination Method to Wire & Cable	Crimp							
Mechanical Attachment								
Connector Mounting Type	Cable Mount (Free-Hanging)							
Housing Features								

DMC-M 20-22 PN

Insert for Contacts, Pin, 20 Pole Configuration, Crimp, Wire-to-Wire, Sealable, 26 – 22 AWG, .15 – .4 mm² Wire, 5 A, Power, Signal & High Speed Data



Centerline (Pitch)	2.54 mm[.1 in]							
Dimensions								
Wire Size	.15 – .4 mm²							
Usage Conditions								
Operating Temperature Range	-55 – 175 °C[-67 – 347 °F]							
Operation/Application								
Circuit Application	Power, Signal & High Speed Data							
Packaging Features								
Packaging Method	Package							
Packaging Quantity	1							
Product Compliance								
For compliance documentation, visit the product page on TE.com>								
EU RoHS Directive 2011/65/EU	Compliant with Exemptions							
EU ELV Directive 2000/53/EC	Out of Scope							
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold							

EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE		
	2024 (241)		
	SVHC > Threshold:		
	Pb (1.2% in alloy)		
	Dodecamethylcyclohexasiloxane (D6) (1%		
	in component)		
	Decamethylcyclopentasiloxane (D5) (1% in		
	component)		
	Octamethylcyclotetrasiloxane (D4) (1% in		
	COMPONENT) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.		
	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free		
	Not reviewed for colder process consbility		

Halogen Content

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these


DMC-M 20-22 PN

Insert for Contacts, Pin, 20 Pole Configuration, Crimp, Wire-to-Wire, Sealable, 26 – 22 AWG, .15 – .4 mm² Wire, 5 A, Power, Signal & High Speed Data



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Customers Also Bought

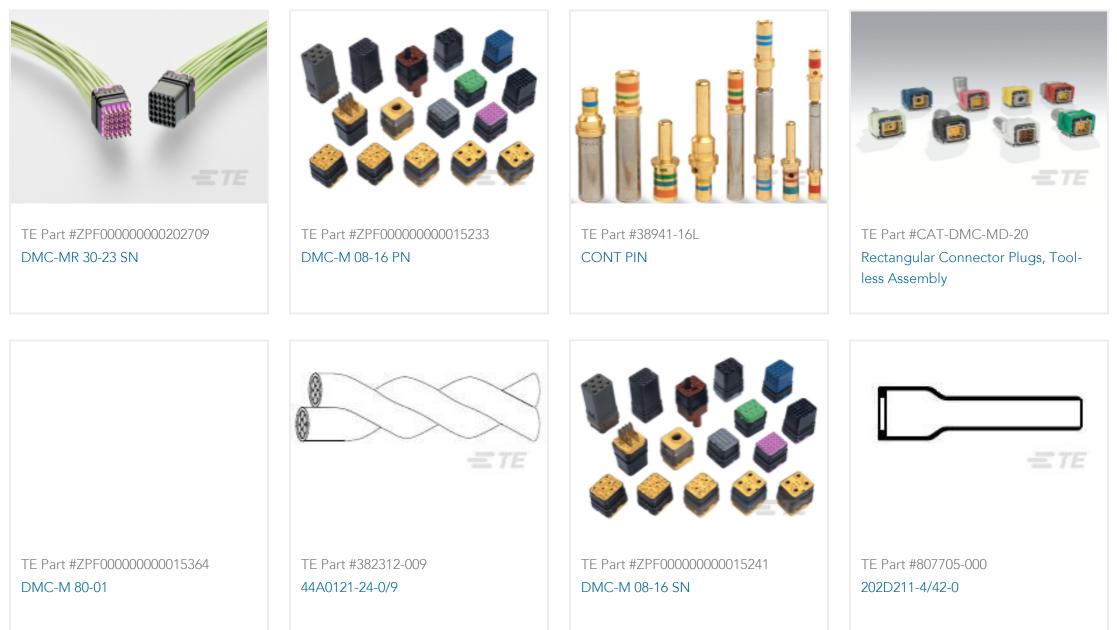

Documents

Product Drawings DMC-M 20-22 PN

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_ZPF0000000015306_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_ZPF0000000015306_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_ZPF0000000015306_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

C For support call+1 800 522 6752

DMC-M 20-22 PN

Insert for Contacts, Pin, 20 Pole Configuration, Crimp, Wire-to-Wire, Sealable, 26 – 22 AWG, .15 – .4 mm² Wire, 5 A, Power, Signal & High Speed Data



DMC-M Series Single Module EN4165

English