

## General-Purpose







# 70 Series

## 60V·1b/2b



## Features

- Contact Form 1b / 2b
- Load Voltage 60V
- Operation LED Current 3.0mA
- Load Current 440mA
- On-Resistance 0.75Ω
- Output Capacitance 165pF
- Low Off-State Leakage Current 10.0μA



## Application


- Modem
- Telephone Equipment
- Security Equipment
- Sensing Equipment
- Automatic Test Equipment
- I/O Modules
- Electric Vehicle

PART NO	PACKAGE	PACKING
AG70	DIP-4	Tube 90pcs
AE70	DIP-6	Tube 50pcs
AH70	DIP-8	Tube 45pcs
AG70F	SMD-4	Tube 90pcs
AE70F	SMD-6	Tube 50pcs
AH70F	SMD-8	Tube 45pcs
AG70S	SOP-4	Tube 100pcs
AH70S	SOP-8	Tube 50pcs
AG70F-R1	SMD-4	
AE70F-R1	SMD-6	
AH70F-R1	SMD-8	
AG70S-R1	SOP-4	
AH70S-R1	SOP-8	
		Reel 1000pcs

\* Package & PCB Layout Design, See Page 134


## Terminal Identification

## AG70(F)(S)




- 1:Anode (LED)  
2:Cathode (LED)  
3,4:Drain (MOS FET)

## AE70(F)



- 1:Anode (LED)  
2:Cathode (LED)  
3:NC  
4,6:Drain (MOS FET)  
5:Source (MOS FET)

## AH70(F)(S)

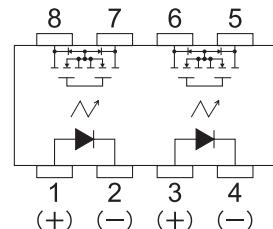

- 1,3:Anode (LED)  
2,4:Cathode (LED)  
5,6,7,8:Drain (MOS FET)

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

**General-Purpose****Absolute Maximum Ratings 絶對最大定格 (Ambient Temperature 周圍溫度 : 25°C )**

Item		Symbol	Value				
Outline Package			AG70S		AH70S	AG70(F)	AH70(F)
			1CH	2CH	1CH	2CH	1CH
Input 輸入	Continuous LED Current 連續 LED 電流	I <sub>F</sub>	50mA				
	Peak LED Current LED 峰值電流 (f=100 Hz,Duty=1%)	I <sub>FP</sub>	500mA				
	LED Reverse Voltage 逆向 LED 電壓	V <sub>R</sub>	5V				
	Input Power Dissipation 輸入損耗	P <sub>IN</sub>	75mW				
Output 輸出	Load Voltage 負荷電壓	V <sub>L</sub>	60V (AC peak or DC)				
	Load Current 負荷電流 (mA)	I <sub>L</sub>	400	350	440	380	440
	Peak Load Current 峰值負荷電流 (1ms,1 shot) (mA)	I <sub>PEAK</sub>	600	600	600	600	600
	Output Power Dissipation 輸出損耗 (mW)	P <sub>OUT</sub>	300	450	450	600	450
Total Power Dissipation 全損耗 (mW)		P <sub>T</sub>	350	500	500	650	500
I/O Breakdown Voltage 入 / 出力間絕緣電壓 (Vrms)		V <sub>I/O</sub>	1500	1500	1500	1500	1500
Operating Temperature 使用時溫度		T <sub>OPR</sub>	-40°C ~ +85°C				
Storage Temperature 保存溫度		T <sub>STG</sub>	-40°C ~ +100°C				

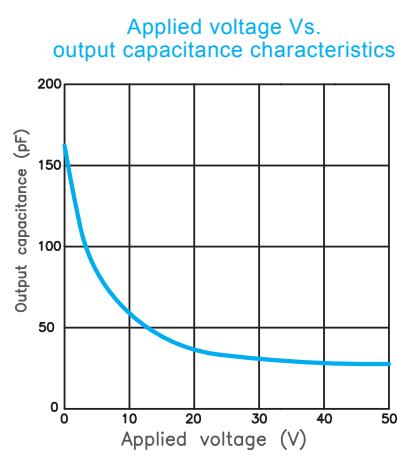
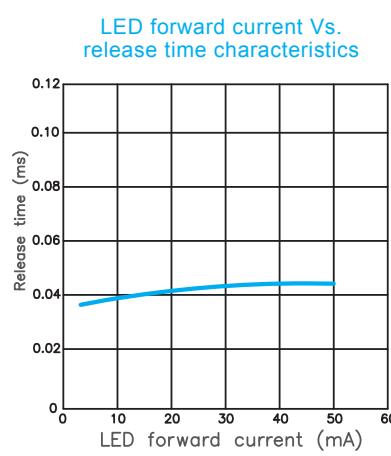
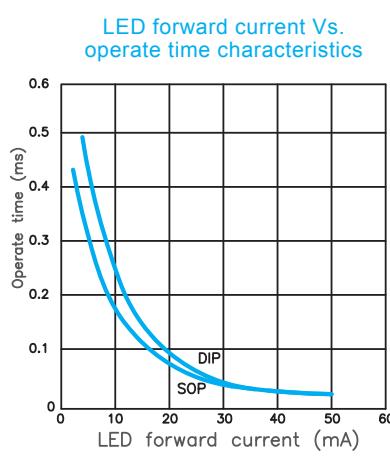
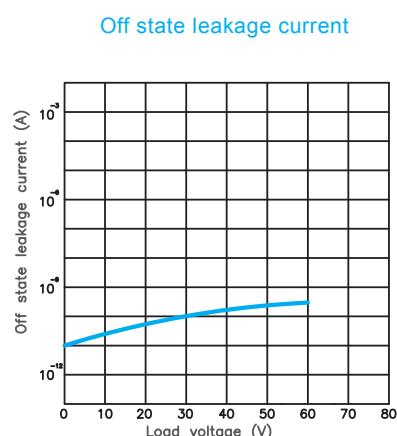
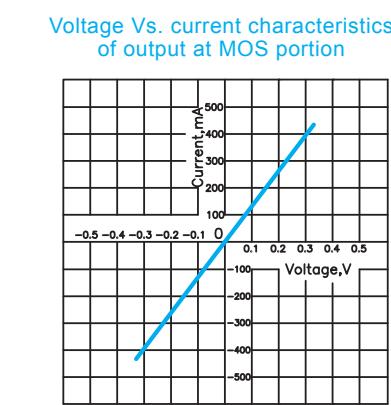
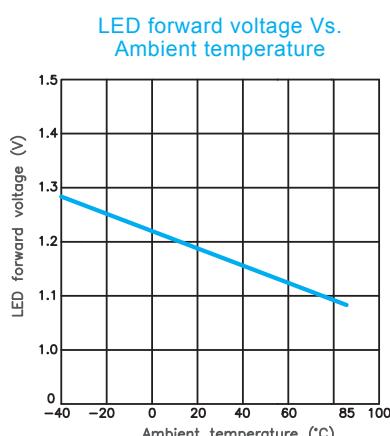
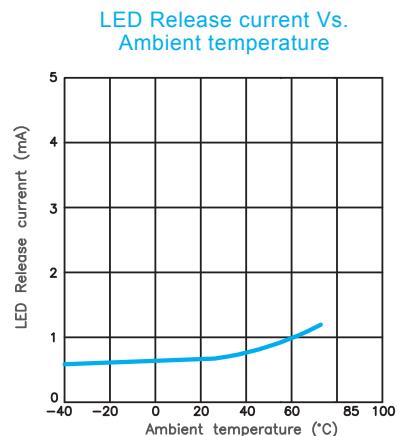
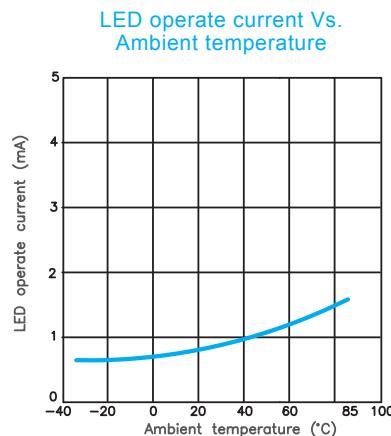
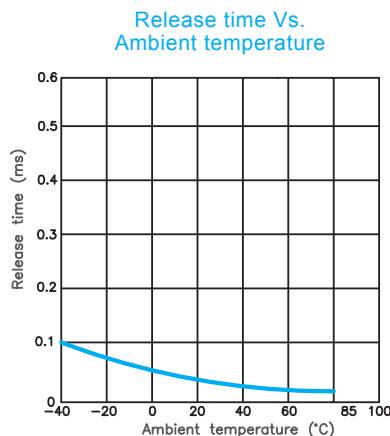
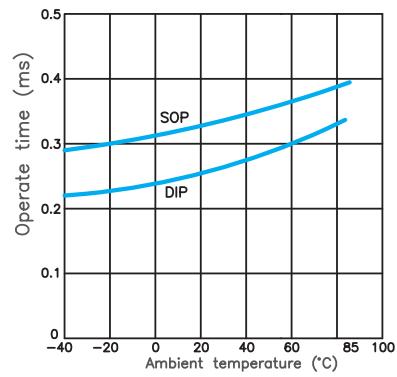
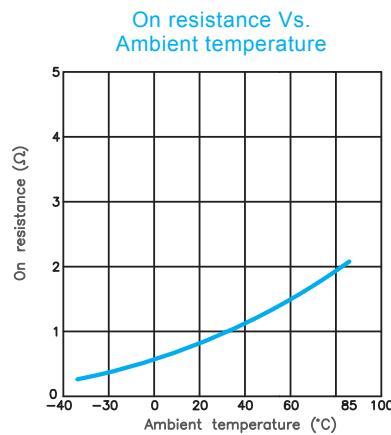
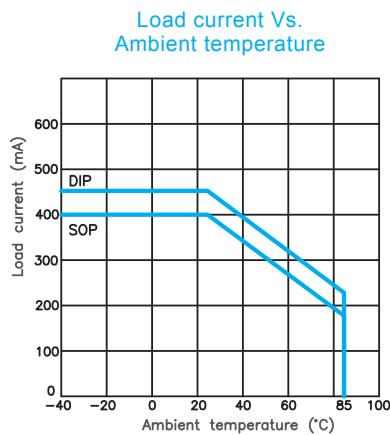
**Electrical Specifications 電性規格 (Ambient Temperature 周圍溫度 : 25°C )**

Item		Symbol	MIN.	TYP.	MAX.	Units	Conditions
Input 輸入	LED Forward Voltage LED 順向電壓	V <sub>F</sub>	1.0	1.17	1.5	V	I <sub>F</sub> =10mA
	Operation LED Current LED 動作電流	I <sub>F ON</sub>		0.9	3.0	mA	
	Recovery LED Voltage LED 復位電壓	V <sub>F OFF</sub>	0.5	1.0		V	
Output 輸出	On-Resistance 導通電阻 Drain to Drain	R <sub>ON</sub>		0.75	1.0	Ω	I <sub>F</sub> =5mA,I <sub>L</sub> =Rating Time to flow is within 1sec.
	Off-State Leakage Current 開路狀態漏電流	I <sub>LEAK</sub>			10	μA	I <sub>F</sub> =5mA,V <sub>L</sub> =60V
	Output Capacitance 輸出端容量	C <sub>OUT</sub>		165		pF	I <sub>F</sub> =5mA,V <sub>L</sub> =0V,f=1MHz
Transmission 傳達	Operate Time 動作時間	T <sub>OFF</sub>		0.35	1.0	ms	I <sub>F</sub> =5mA I <sub>L</sub> =Rating (for SOP type)
	Release Time 復位時間	T <sub>ON</sub>		0.05	0.5	ms	
	Operate Time 動作時間	T <sub>OFF</sub>		0.25	1.0	ms	I <sub>F</sub> =10mA I <sub>L</sub> =Rating (for DIP/SMD type)
	Release Time 復位時間	T <sub>ON</sub>		0.05	0.5	ms	
Coupled 結合	I/O Insulation Resistance 輸入 / 出間絕緣阻抗	R <sub>I/O</sub>	10 <sup>9</sup>			Ω	
	I/O Capacitance 輸入 / 力端靜電容量	C <sub>I/O</sub>		1.3		pF	f=1MHz

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

































## General-Purpose



為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.











*Package & PC Board Pattern*

Package 包裝	Dimensions 外型尺寸圖	PC Board pattern PC 板加工圖
 <b>DIP4</b>	  	 (Bottom View)
 <b>SMD4</b>	  	 (Top View)
 <b>DIP6</b>	  	 (Bottom View)
 <b>SMD6</b>	  	 (Top View)
 <b>DIP8</b>	  	 (Bottom View)
 <b>SMD8</b>	  	 (Top View)
 <b>SOP4</b>	  	 (Top View)
 <b>SOP8</b>	  	 (Top View)

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.







## Packing Specifications

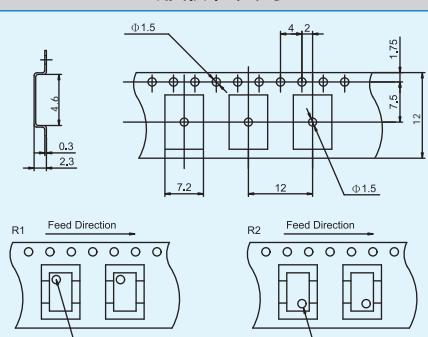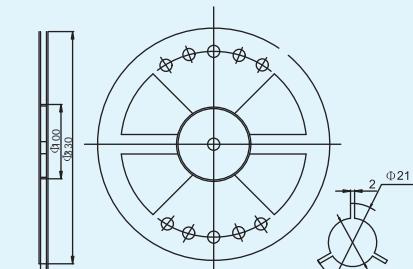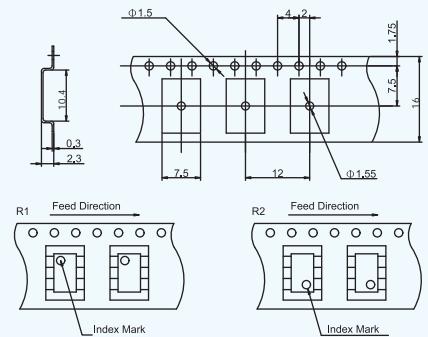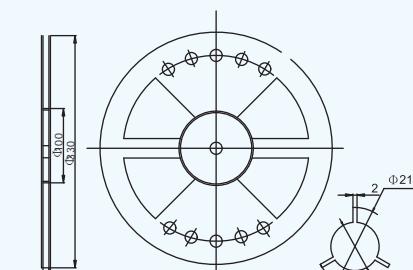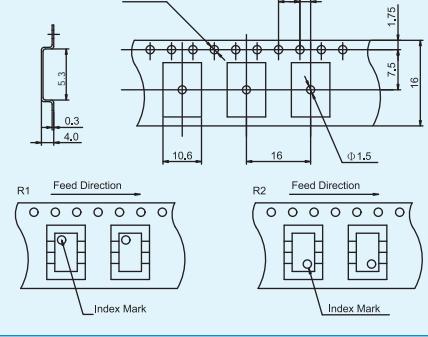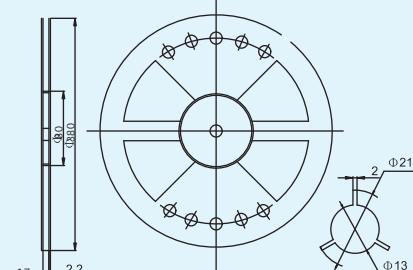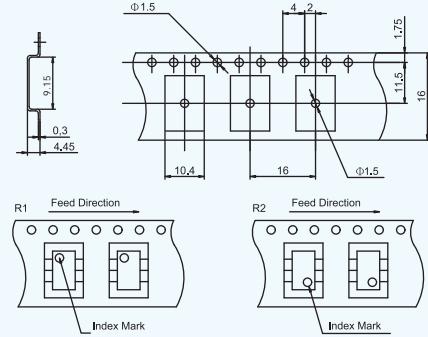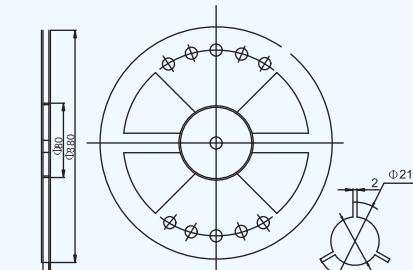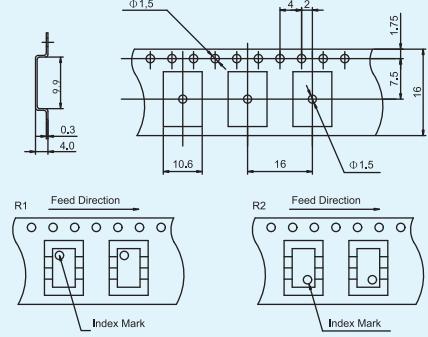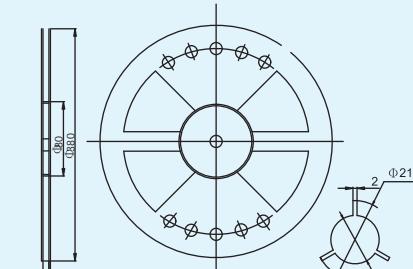Package Type 包裝類型	Tape shape & dimensions 形狀和尺寸	Reel shape & dimensions 圓帶形狀和尺寸	Quantity 數量
4 Pin SOP			1000 pcs
8 Pin SOP			1000 pcs
4 Pin SMD			1000 pcs
6 Pin SMD			1000 pcs
8 Pin SMD			1000 pcs

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

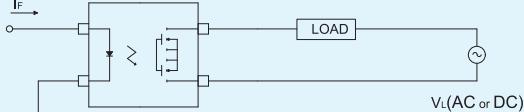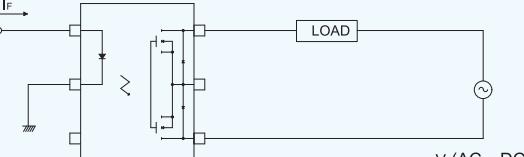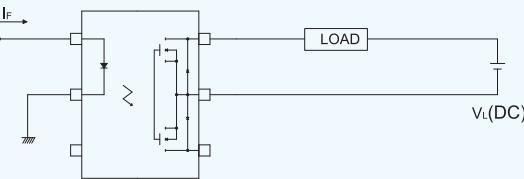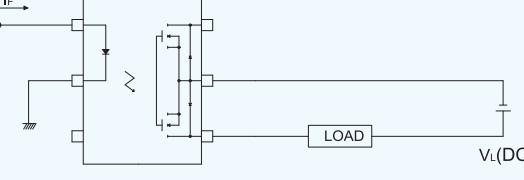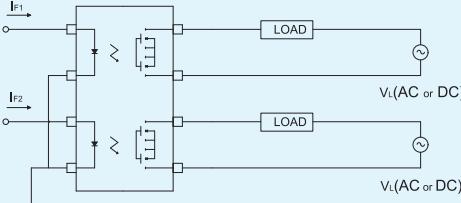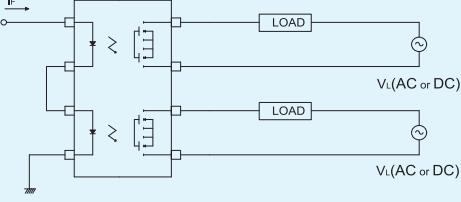*Load Connecting Method*

Type 類型	Load 負荷	Connection 接續方法	Feature 特長
4 pin	AC or DC	 $I_F$ →	Control bi-directional signal 可控制雙向信號
A	AC or DC	 $I_F$ →	Control bi-directional signal 可控制雙向信號
6 pin	B	 $V_L(DC)$	On-Resistance is 1/2 of A-connection 導通電阻值是 A 接法的 1/2 2-Make-contacts (Source Common)
		 $V_L(DC)$	On-Resistance is 1/2 of B-connection 導通電阻值是 B 接法的 1/2
8 pin	AC or DC	 $I_F1$ → $I_F2$ → $V_L(AC \text{ or } DC)$ $V_L(AC \text{ or } DC)$	2 input and 2 output 2 入力和 2 出力回路
		 $I_F$ → $V_L(AC \text{ or } DC)$ $V_L(AC \text{ or } DC)$	1 input and 2 output 1 入力和 2 出力回路

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.