

SPECIFICATION SHEET

SPECIFICATION SHEET NO.	Q0528-SIR916M500S043
DATE	May 28, 2023
REVISION	A0
DESCRIPITION	SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads SIR Series
	916.5000000MHz, 1-Port, Insertion Loss: 2.0 dB Max.
	Tolerance ±100KHz
	Operating Temp. Range -40°C ~+85°C,
	Reflow Profile Condition 260 °C Max. Tape/Reel, 1000pcs/Reel
	RoHS/RoHS III compliant
CUSTOMER	
CUSTOMER PART NUMBER	
CROSS REF. PART NUMBER	
ORIGINAL PART NUMBER	TGS SIR 916.5MB TLF
PART CODE	SIR916M500S043

VENDOR APPROVE

Issued/Checked/Approved








DATE: May 28, 2023

CUSTOMER APPROVE		

DATE:

5/28/2023



SMD SAW RESONATOR 5035 TYPE SIR SERIES

MAIN FEATURE

- SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads
- Package Code QCC4A
- One Port SAW Resonator
- Electrostatic Sensitive Device(ESD)
- Low-loss and Short Lead time
- Cross more competitors part
- RoHS/RoHS III compliant

APPLICATION

- Bluetooth, wireless communication set
- Communication Electronics

PART CODE GUIDE



SIR	916M500	S	043
1	2	3	4


- 1) SIR: Series Code, SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 pads
- 2) 916M50: Frequency range code for 916.5000MHz
- 3) S: SMD type, Package Tape/Reel,
- 4) 043: Internal code (A~Z or 1~9 or Blank)

5/28/2023 2

SMD SAW RESONATOR 5035 TYPE SIR SERIES


DIMENSION (Unit: mm, Tol.: +-0.15mm)

Image for reference




SIR series,

Package Code QCC4A L5.0*W3.5*H1.5mm 5035 Type




Pin	Configuration
1	Input/Output
3	Output/Input
2,4	Ground



Marking:

Standard + •: Pin 4

Test Circuit

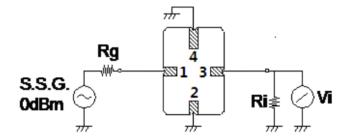

Rg=Ri=50Ω



SMD SAW RESONATOR 5035 TYPE SIR SERIES

ELECTRICAL PARAMETERS

Parameter	Part No. Symbol		Value		
	Symbol		Min.	Typical	Max.
Original Manufacturer	TGS			TGS Crystals	
Holder Type	SIR		SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads		
Frequency Range (f0)	916.5M	MHz	916.500		
Frequency Tolerance	В	KHz		±100	
Operation Temperance		°C	-40		+85
Storage Temperance		°C	-40		+85
DC Voltage		V		±30	
RF Power Dissipation		dBm		15	
Insertion Loss		dB		1.2	2.0
Quality Factor (Q) @Unload				15069	
Quality Factor (Q) @50 Ω Loaded				715	
Turnover Temperature		°C			
Frequency Temp. Coefficient		ppm/°C			
Aging (Absolute Value during the First Year)		ppm/Year		≤±10	
DC Insulation Resistance		ΜΩ	1.0		
RF Equivalent RLC Model @Motional Resistance		Ω		4.9	10.0
RF Equivalent RLC Model @Motional Inductance		μН		13.0	
RF Equivalent RLC Model @Motional Capacitance		fF		2.54	
Static Capacitance		pF	2.55	2.85	3.15
Package	Т			Tape/Reel	
RoHS Status	LF		Ro	HS III compli	ant
Add Value				Blank: N/A	
Internal Control Code				Blank: N/A	

Note: 1) Test Temperature: $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, Terminating source impedance: 50Ω Terminating load impedance: 50Ω


2) Original Part Number: TGS SIR 916.5MB TLF

5/28/2023 4




SMD SAW RESONATOR 5035 TYPE SIR SERIES

FREQUENCY RESPONSE

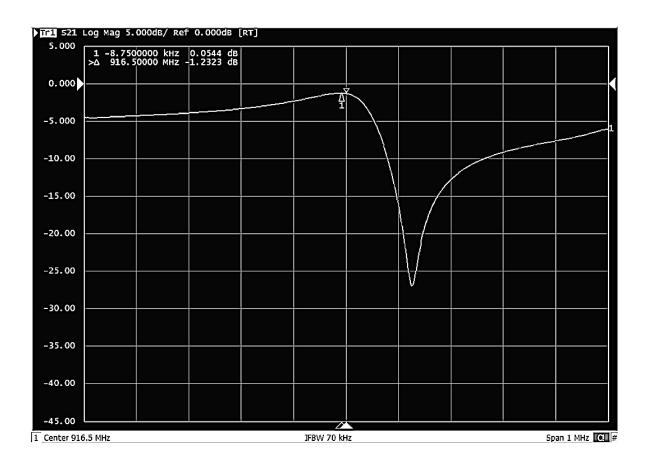


SMD SAW RESONATOR 5035 TYPE SIR SERIES

EQUIVALENT LC MODEL




TEMPERATURE CHARACTERISTICS

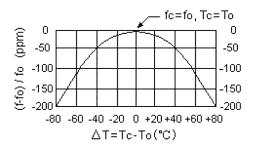


Note: The curve shown above accounts for resonator contribution only and does not include LC component temperature contributions.

PLICTYPCIAL APATION CIRCUITS


Typical Low-power Transmitter Application

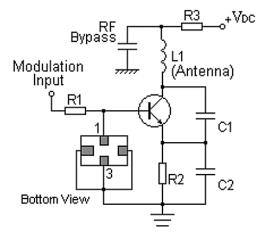

Typical Local Oscillator Application

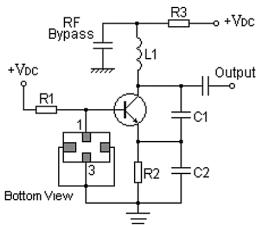

NextGen Components, Inc.



SMD SAW RESONATOR 5035 TYPE SIR SERIES


RELIABILITY

Test Items	Test Method And Conditions	Requirement
Temperature Storage	(1) Temperature: $85^{\circ}C\pm2^{\circ}C$, Duration: 250h, Recovery time: $2h\pm0.5h$ (2) Temperature: $-40^{\circ}C\pm3^{\circ}C$, Duration: 250h, Recovery time: $2h\pm0.5h$	It shall remain electrical performance
Humidity Test	Conditions: 60°C±2°C , 90~95% RH Duration: 250h	after tests
Thermal Shock	Heat cycle conditions: TA=-40°C±3°C, TB=85°C±2°C, t1=t2=30min, Switch time: ≤3min, Cycle time: 100 times, Recovery time: 2h±0.5h.	
Vibration Fatigue	Frequency of vibration: 10~55Hz Amplitude:1.5mm Directions: X,Y and Z Duration: 2h	
Drop Test	Cycle time: 10 times Height: 1.0m	
Solderability	Temperature: 245°C±5°C Duration: 3.0s5.0s Depth: DIP2/3 , SMD1/5	
Resistance to Soldering Heat	(1)Thickness of PCB:1mm , Solder condition: 260°C±5°C , Duration: 10±1s (2)Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s , Recovery time : 2 ± 0.5h	




SMD SAW RESONATOR 5035 TYPE SIR SERIES

SUGGESTED REFLOW PROFILE (For Reference Only)

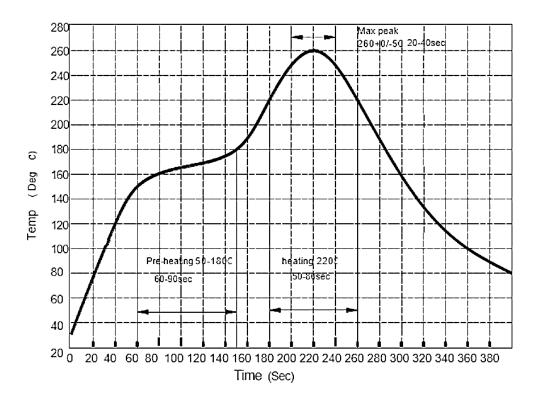

SMD SAW RESONATOR 5035 TYPE SIR SERIES


TAPE DIMENSION (Unit: mm, 1000pcs/Reel)

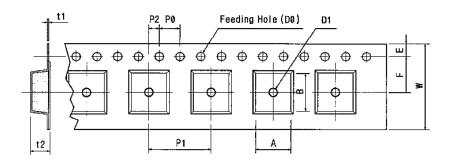


Tape Running Direction

Code	Dimension
W	12.0+/-0.30
F	5.50+/-0.10
E	1.75+/-0.10
P 0	4.00+/-0.10
P 1	8.00+/-0.10
P 2	2.00+/-0.10
D 0	Ø1.5+/-0.10
D 1	Ø1.5+/-0.25
t 1	0.30+/-0.01
t 2	1.90+/-0.05
А	3.70+/-0.10
В	5.20+/-0.10

REEL DIMENSION (Unit: mm)

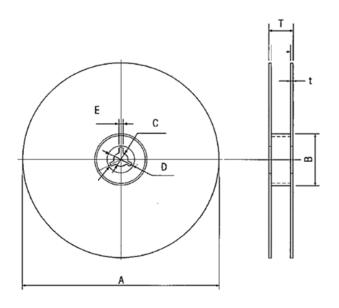

Code	Dimension
А	Ø178.0+/-2.0
В	Ø60.0+/-0.5
С	Ø13.0+/-0.5
D	Ø21+/-0.8
E	2.00+/-0.5
Т	15.4+/-1.00
t	0.31 Max.



SMD SAW RESONATOR 5035 TYPE SIR SERIES

CAUTION

- 1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to ESD protect in the test.
- Static voltage between signal load and ground may cause deterioration and destruction of the component.
 Please avoid static voltage.
- Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
- 4. Only leads of component may be soldered. Please avoid soldering another part of component.
- 5. There is a close relationship between the device's performance and matching network. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.
- 6. The temperature of manual welding should not exceed 300 °C.
- 7. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- 8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) perse, not for applications, processes and circuits implemented within components or assemblies.
- 10. For questions on technology, prices and delivery, please contact our sales offices or e-mail: sales@NextGenComponent.com.

DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information