





Features

- Constant Voltage PWM style output with frequency 1KHz
- · PCB type design
- · Built-in active PFC function
- No load power consumption<0.5W(Blank-Type)
- Function options: 2 in 1 dimming (dim-to-off);
 Auxiliary DC output
- · 3 years warranty

Applications

- LED strip lighting
- Indoor LED lighting
- · LED decorative lighting
- · LED architecture lighting


GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

IDPV-45 series is a 45W PCB type AC/DC LED driver featuring the constant voltage mode PWM style output design. IDPV-45 operates from $90\sim295$ VAC and offers models with different rated voltage ranging between 12V and 60V. Thanks to the high efficiency up to 90%, with the fanless design, the entireseries is able to operate for $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$ ambient temperature under free air convection. IDPV-45 is equipped with various function options, such as dimming methodologies, so as to provide the design flexibility for LED lighting system.

Model Encoding

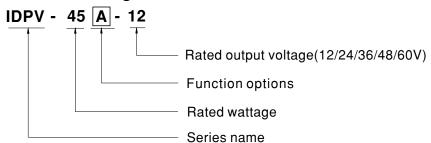


Туре	Function	
Blank	2 in 1 dimming (0~10VDC and 10V PWM)	
Α	2 in 1 dimming and Auxiliary DC output	

SPECIFICATION


MODEL		IDPV-45□-12	IDPV-45□-24	IDPV-45□-36	IDPV-45□-48	IDPV-45□-60
	DC VOLTAGE	12V	24V	36V	48V	60V
	RATED CURRENT	3.0A	1.88A	1.25A	0.94A	0.75A
	RATED POWER	36W	45.12W	45W	45.12W	45W
	DIMMING RANGE	0~100%				•
OUTPUT	VOLTAGE TOLERANCE	±10%				
	PWM FREQUENCY (Typ.)	1KHz(±20%)				
	SETUP TIME Note.3	500ms / 230VAC 1200ms/115VAC				
	AUXILIARY DC OUTPUT Note.4	Nominal 12V(deviation 11.4~12.6)@50mA for A-Type only				
INPUT	VOLTAGE RANGE Note.2	90 ~ 295VAC 127 ~ 417VDC (Please refer to "STATIC CHARACTERISTIC" section)				
	FREQUENCY RANGE	47 ~ 63Hz				
	POWER FACTOR (Typ.)	PF>0.95/115VAC, PF>0.92/230VAC, PF>0.9/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)				
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VAC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION" section)				
	EFFICIENCY (Typ.)	84%	86%	88%	88%	90%
	AC CURRENT (Typ.)	0.6A / 115VAC 0.4	A / 230VAC 0.3A /	277VAC		
	INRUSH CURRENT(Typ.)	COLD START 30A(twi	dth=150μs measured a	t 50% Ipeak) at 230VA	C; Per NEMA 410	
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	32 units (circuit breaker of type B) / 32 units (circuit breaker of type C) at 230VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC				
	NO LOAD POWER CONSUMPTION	PTION <0.5W for Blank-Type, <1.2W for A-Type				
	SHORT CIRCUIT	Shut down O/P voltage	e, re-power on to recov	ery		
PROTECTION	OVER CURRENT	105 ~ 115%				
	OVER CORRENT	Protection type: Hiccup mode, recovers automatically after fault condition is removed				
	WORKING TEMP.	Ta=-20 ~ +40°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 40°C)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes				
	SAFETY STANDARDS	UL8750,CSA C22.2 NO.250.13-12;ENEC BS EN/EN61347-1 & BS EN/EN61347-2-13 independent, BS EN/EN62384 approved				
CAFFTVO	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC				
SAFETY &	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH				
EMC	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load ≥ 60%) ; BS EN/EN61000-3-3				
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level(surge immunity:Line-Line:1KV)				
OTHERS	MTBF	4022.6K hrs min. T	elcordia SR-332 (Bellco	ore) ; 425.1K hrs min.	MIL-HDBK-217F (25°C	C)
	DIMENSION	120*66.5*22mm (L*W*	•			
	PACKING	0.14Kg;81pcs/12.5Kg	1.32CUFT			
NOTE	 All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. Length of set up time is measured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time. Aux. 12V will be damaged with short circuit; It will not be available with dimming off or output no load condition. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains. Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx 					

■ DIMMING OPERATION

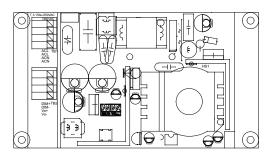

※ Dimming principle for PWM style output

Dimming is achieved by varying the duty cycle of the output current.

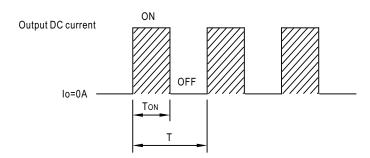


Duty cycle(%) =
$$\frac{TON}{T}$$
 ×100%

Output PWM frequency: 1KHz(±20%)


\times 2 in 1 dimming function

Applying additive 0 ~ 10VDC

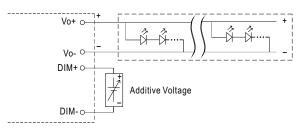



"DO NOT connect "DIM- to Vo-"

Applying additive 10V PWM signal (frequency range 300~3000Hz):

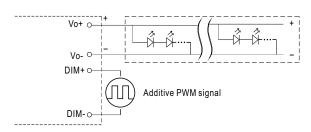


"DO NOT connect "DIM- to Vo-"






Note: 1. Min. duty cycle of output current is about 8% and the output current is not defined when 0%< Iout<8%.

2. The duty cycle of output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.

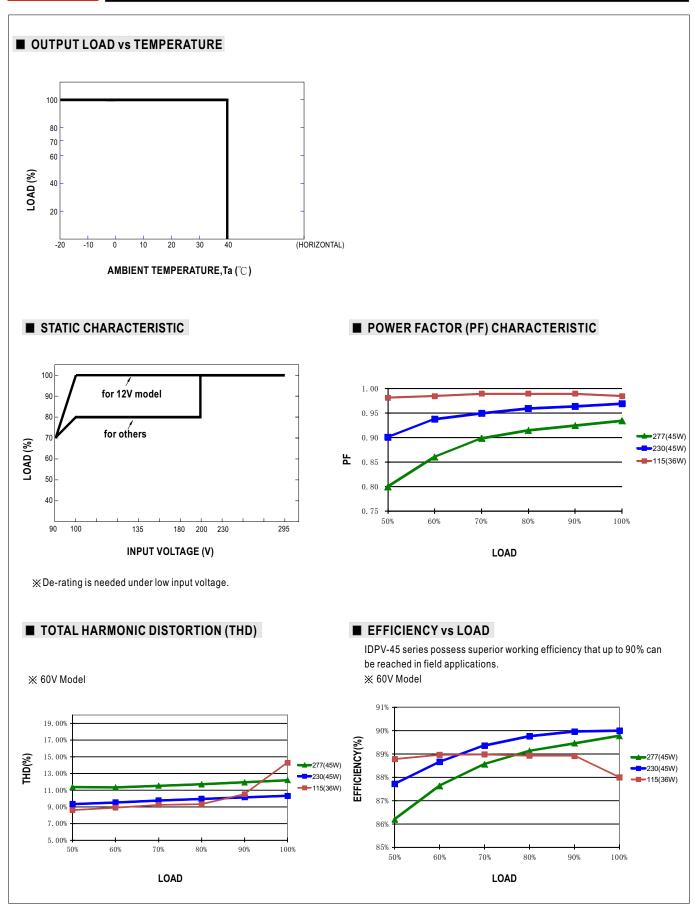





fosc: 70~150KHz

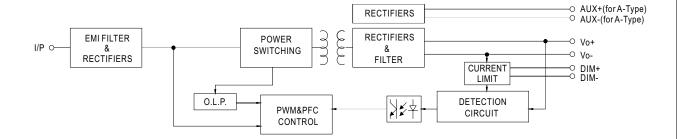

■ MECHANICAL SPECIFICATION

※ Blank-Type Unit:mm

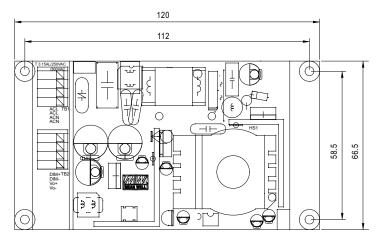




Terminal Pin No. Assignment(TB1)


Pin No.	Assignment	
1	ACL	
2	ACL	
3	ACN	
4	ACN	

Terminal Pin No. Assignment(TB2)

Pin No.	Assignment
1	DIM+
2	DIM-
3	Vo+
4	Vo-



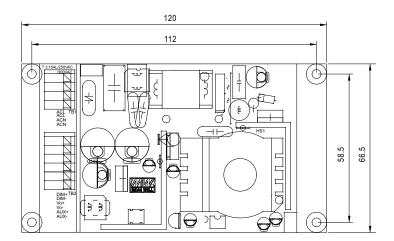



Terminal Pin No. Assignment(TB1)

Pin No.	Assignment
1	ACL
2	ACL
3	ACN
4	ACN

Terminal Pin No. Assignment(TB2)

Pin No.	Assignment	Pin No.	Assignment
1	DIM+	4	Vo-
2	DIM-	5	AUX+
3	Vo+	6	AUX-

■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html