# soft starter-ATS22-control110V-power 230V(200hp)/460V(400hp)/575V(500hp)





#### Main Range of Product Altistart 22 **Product or Component** Soft starter Type Product destination Asynchronous motors Product Specific Pumps and fans Application Component name ATS22 Phase 3 phase [Us] rated supply 208...600 V - 15...10 % voltage 200 Hp 230 V Maximum Horse Power Rating 400 Hp 460 V 500 hp 575 V 477 A Factory setting current 251 W for standard applications Power dissipation in W Utilisation category AC-53A Type of start Start with torque control (current limited to 3.5 ln) IcL starter rating 590 A connection in the motor supply line for standard applications

IP00

#### Complementary

Complementary		
Assembly style	With heat sink	
Function Available	Internal bypass	
Supply voltage limits	177660 V	
Supply frequency	5060 Hz - 1010 %	
Network Frequency	4566 Hz	
Device connection	In the motor supply line	
[Uc] control circuit voltage	110 V - 1510 % 50/60 Hz	
Control circuit consumption	20 W	
Discrete output number	2	
Discrete output type	Relay outputs R1 230 V running, alarm, trip, stopped, not stopped, starting, ready C/O Relay outputs R2 230 V running, alarm, trip, stopped, not stopped, starting, ready C/O	
Minimum switching current	100 mA 12 V DC relay outputs)	
Maximum switching current	5 A 250 V AC resistive 1 relay outputs 5 A 30 V DC resistive 1 relay outputs 2 A 250 V AC inductive 0.4 20 ms relay outputs 2 A 30 V DC inductive 7 ms relay outputs	
Discrete input number	crete input number 3	
Discrete input type	LI1, LI2, LI3) logic, 5 mA 20 kOhm	
Discrete input voltage	110 V <= 121 V	
Discrete input logic	Positive logic LI1, LI2, LI3 < 20 V <= 15 mA > 79 V, <= 2 mA	
Output current	0.41 lcl adjustable	
PTC probe input	750 Ohm	
Communication Port Protocol	Modbus	
Connector type	1 RJ45	
Communication data link	Serial	
Physical interface	RS485 multidrop	

IP Degree of Protection

Transmission Rate	4800, 9600 or 19200 bps	
Installed device	31	
Protection type	Phase failure line Thermal protection motor Thermal protection starter	
Marking	CE	
Type of cooling	Forced convection	
Operating position	Vertical +/- 10 degree	
Height	17.91 in (455 mm)	
Width	11.97 in (304 mm)	
Depth	13.37 in (339.7 mm)	
Net Weight	110.23 lb(US) (50 kg)	

## Environment

Electromagnetic compatibility	Conducted and radiated emissions level A IEC 60947-4-2	
, ,	Damped oscillating waves level 3 IEC 61000-4-12	
	Electrostatic discharge level 3 IEC 61000-4-2	
	Immunity to electrical transients level 4 IEC 61000-4-4	
	Immunity to radiated radio-electrical interference level 3 IEC 61000-4-3	
	Voltage/current impulse level 3 IEC 61000-4-5	
Standards EN/IEC 60947-4-2		
Product Certifications	GOST	
	C-tick	
	UL	
	CSA	
	CCC	
Vibration resistance	1 gn 13200 Hz)EN/IEC 60068-2-6	
	1.5 mm 213 Hz)EN/IEC 60068-2-6	
Shock resistance	15 gn 11 ms EN/IEC 60068-2-27	
Noise level	56 dB	
Pollution degree	Level 2 IEC 60664-1	
Relative humidity	095 % without condensation or dripping water EN/IEC 60068-2-3	
Ambient air temperature for operation	14104 °F (-1040 °C) without derating)	
	104140 °F (4060 °C) with current derating 2.2 % per °C)	
Ambient Air Temperature for Storage	-13158 °F (-2570 °C)	
Operating altitude	<= 3280.84 ft (1000 m) without derating	
	> 3280.84< 6561.68 ft (> 1000< 2000 m) with current derating of 2.2 % per	
	additional 100 m	

## Ordering and shipping details

Category	22576 - ATS22 ALTISTART	
Discount Schedule	CP1G	
GTIN	3606480211249	
Nbr. of units in pkg.	1	
Package weight(Lbs)	78.82 lb(US) (35.75 kg)	
Returnability	Yes	
Country of origin	CN	

# Packing Units


Unit Type of Package 1	PCE	
Package 1 Height	21.06 in (53.5 cm)	
Package 1 width	15.75 in (40 cm)	
Package 1 Length	22.64 in (57.5 cm)	

# Offer Sustainability

Sustainable offer status	Green Premium product	
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
REACh Regulation	☑ REACh Declaration	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EVEN RoHS	
Mercury free	Yes	
RoHS exemption information	€Yes	
China RoHS Regulation	<sup>©</sup> China RoHS Declaration	
Environmental Disclosure	Product Environmental Profile	
Circularity Profile	End Of Life Information	
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.	
Contractual warranty		
Warranty	18 months	

#### Frame Size E

#### **Dimensions**

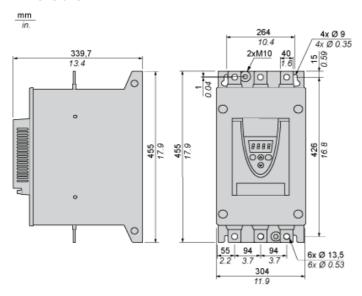

#### **Precautions**

#### Standards

The Altistart 22 soft starter is compliant with pollution Degree 2 as defined in NEMA ICS1-1 or IEC 60664-1.

For environment pollution degree 3, install the Altistart 22 soft starter inside a cabinet type 12 or IP54.

#### DANGER


HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

ATS22 soft starters are open devices and must be mounted in a suitable enclosure.

Failure to follow these instructions will result in death or serious injury.

#### Air Circulation

Leave sufficient free space to help the air required for cooling purposes to circulate from the bottom to the top of the unit.



#### Overheating

To avoid the soft starter to overheat, respect the following recommendations:

- Mount the Altistart 22 Soft Starter within ± 10° of vertical.
- Do not locate the Altistart 22 Soft Starter near heat radiating elements.
- Electrical current through the Altistart 22 Soft Starter will result in heat losses that must be dissipated into the ambient air immediately
  surrounding the soft starter. To help prevent a thermal fault, provide sufficient enclosure cooling and/or ventilation to limit the ambient
  temperature around the soft starter.
- If several soft starters are installed in a control panel, arrange them in a row. Do not stack soft starters. Heat generated from the bottom soft starter can adversely affect the ambient temperature around the top soft starter.

### Wall mounted or Floor-standing Enclosure with IP 23 Degree of protection


#### Introduction

To help proper air circulation in the soft starter, grilles and forced ventilation can be installed.

#### Ventilation Grilles



## Forced Ventilation Unit



#### **Power Terminal**

#### Bar Style




Power supply and output to motor	Bar	b	40 mm (1.18 in)
а	5 mm (0.2 in)		
Bolt	M12 (0.47 in)		
Cable and protective cover	Size	2X240 mm²	
Gauge	2X500 MCM		
Protective cover	LA9F703		
Tightening torque	57 N.m		
498.75 lb.in			


## Power connections, minimum required wiring section

IEC cable	UL cable
mm² (Cu 70°C/158°F) (1)	AWG (Cu 75°C/167°F) (1)
2 X 185	2 X 500 MCM

## 110 Vac control, Logic Inputs (LI) 110 Vac, 3-wire control

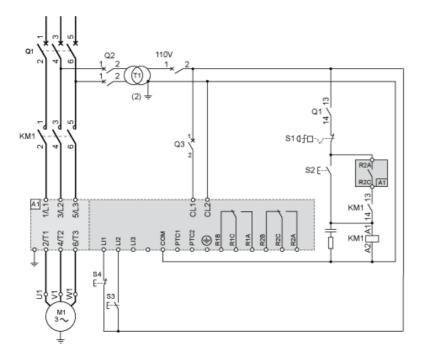


110 Vac control, Logic Inputs (LI) 110 Vac, 2-wire control, freewheelstop

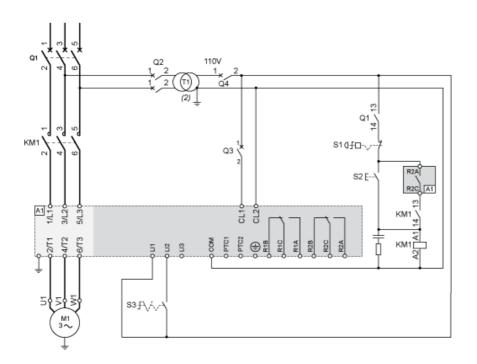

#### Motor Thermal Protection - Cold Curves

#### Curves

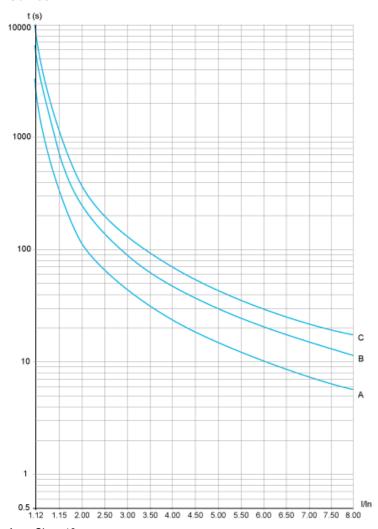

A Class 10 B Class 20 C Class 30

Trip time for a Standard Application (Class 10)

3.5 In

32 s


Trip time for a Severe Application (Class 20)

3.5 ln 63 s

Trip time for a Severe Application (Class 30)

3.5 ln 95 s



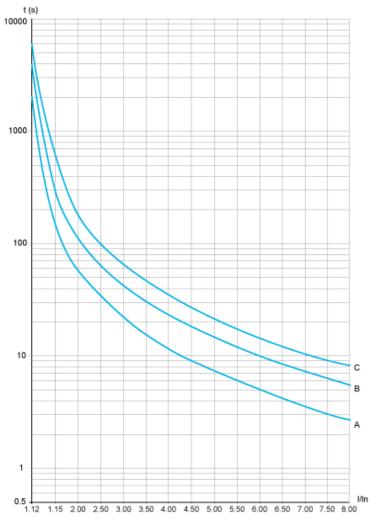

Class 10 Class 20 A B C

Class 30

#### Trip time for a Standard Application (Class 10)

3.5 ln 16 s

## Trip time for a Severe Application (Class 20)

3.5 ln 32 s

## Trip time for a Severe Application (Class 30)

3.5 ln 48 s