

0.8 dB NF Input Protected Low Noise Amplifier, Operating from 3.1 GHz to 3.5 GHz with 28 dB Gain, 8 dBm P1dB and SMA

FMAM63010 is an Input Protected Low Noise RF coaxial amplifier operating in the 3.1 MHz to 3.5 GHz frequency range. The amplifier has a 0.8 dB typical noise figure and can handle up to 1 Watt CW input power without damage. Additional typical performance includes 28 dB small signal gain +/- 0.5 dB flatness, 1.35:1 VSWR, and +8.0 dBm P1dB. The exceptional technical performance is achieved through the use of a 3 stage hybrid MIC assembly that incorporates a low loss input Pin Diode Limiter protective circuit followed by gain stages that use Enhancement Mode (Emode) GaAs pHEMT devices. The 50 Ohm SMA connectorized module is unconditionally stable, includes built-in DC voltage regulation, and supports DC blocking Capacitors on the RF ports. The Amplifier operates with a bias voltage of +12V typical and over the temperature range of -40°C to +85°C. This model is RoHS compliant and has an EAR99 export classification.

Electrical Specifications (TA = +25°C , DC Voltage = 12Vdc , DC Current = 45mA)

Description	Min	Typ	Max	Unit
Frequency Range	3.1		3.5	GHz
Small Signal Gain	26	28	30	dB
Gain Flatness		±0.5	±0.75	dB
Gain Variance at OTR*		1		dB
Output at 1 dB Compression Point	+8	+8		dBm
Output 3rd Intercept Point	+17	+20		dBm
Noise Figure		0.8	1	dB
Input VSWR		1.35:1	1.5:1	
Output VSWR		1.35:1	1.5:1	
Reverse Isolation		45		dB
Spurious			-60	dBc
Input Power (CW)			+30	dBm
Operating DC Voltage	8	12	15	Volts
Operating DC Current	35	45	55	mA
Operating Temperature Range	-40		+85	°C

*OTR= Base Plate Operating Temperature Range

Absolute Maximum Rating

Parameter	Rating	Units
Source Voltage	+18	Volts
RF input Power	+30	dBm
Operating Temperature	-40 to +85	°C
Storage Temperature	-55 to +125	°C



ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.



Features:

- 3.1 MHz to 3.5 GHz Frequency Range
- P1dB: 8 dBm
- High Small Signal Gain: 28 dB typical
- Gain Flatness: ±.5 dB
- Noise Figure: .8 dB typ
- 50 Ohm Input and Output Matched
- -40°C to +85°C Operating Temperature
- Single DC Positive Supply
- Maximum CW Input Power: 1W
- DC Blocking Capacitors

Applications:

- R&D Labs
- Radar Systems
- Test Instrumentation
- Communication Systems
- General Purpose Amplification
- Wideband Gain Block
- IF Amplifier/RF Driver Amplifier
- RF Wideband Front Ends
- Fixed and Land Mobile

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Mechanical Specifications

Size

Length	1.2 in [30.48 mm]
Width	1 in [25.4 mm]
Height	0.4 in [10.16 mm]
Weight	0.061 lbs [27.67 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C


Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

- Values at 25 °C, sea level

Typical Performance Data

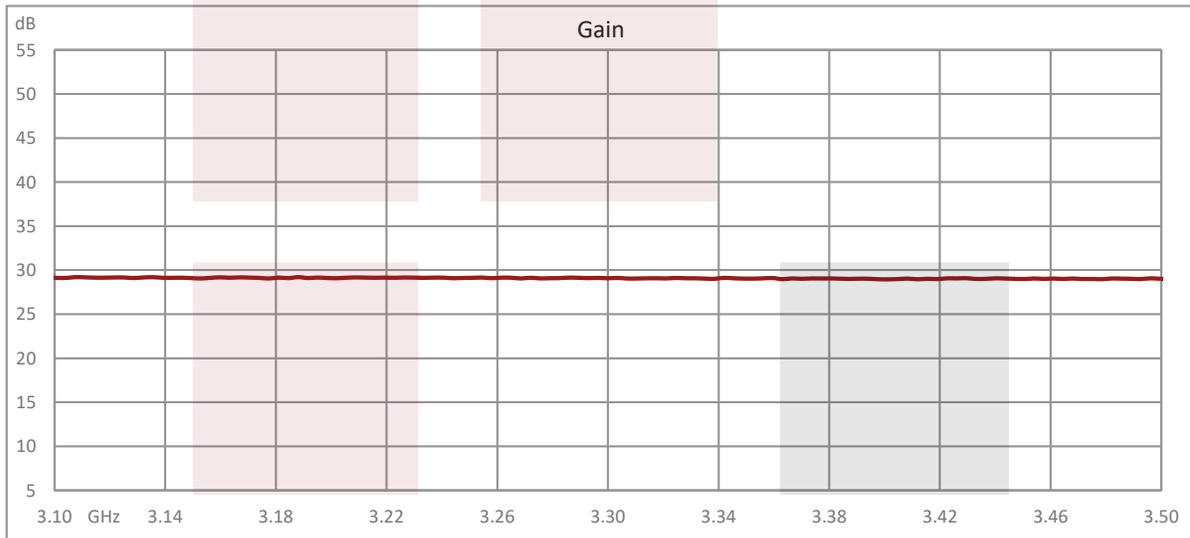

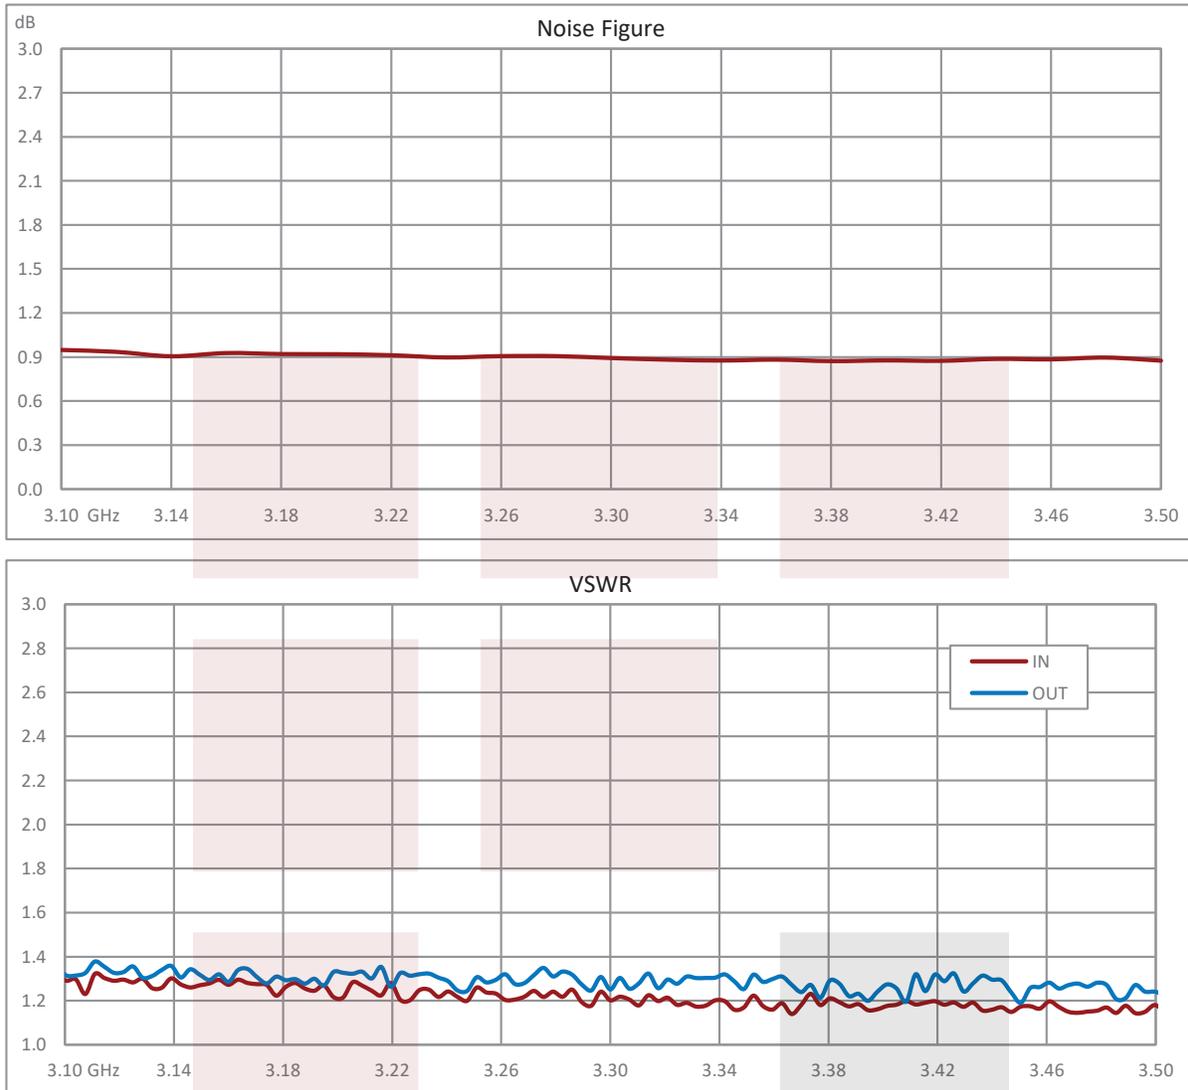


0.8 dB NF Input Protected Low Noise Amplifier, Operating from 3.1 GHz to 3.5 GHz with 28 dB Gain, 8 dBm P1dB and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [0.8 dB NF Input Protected Low Noise Amplifier, Operating from 3.1 GHz to 3.5 GHz with 28 dB Gain, 8 dBm P1dB and SMA FMAM63010](#)

URL: <https://www.fairviewmicrowave.com/0.8db-nf-low-noise-amplifier-28db-fmam63010-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

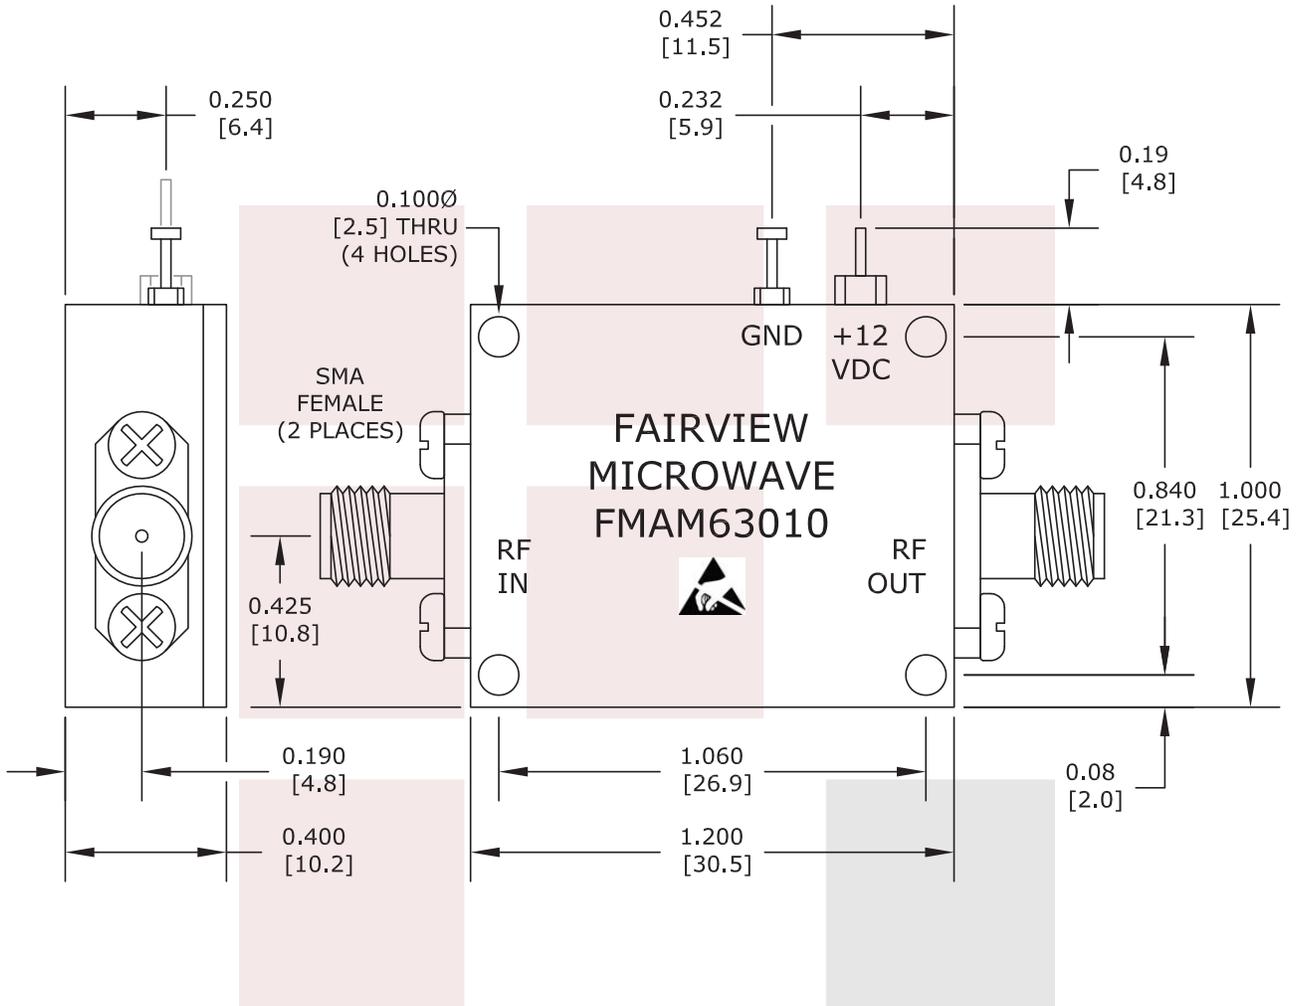

STANDARD TOLERANCES

.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 0.8 dB NF Input Protected Low Noise Amplifier, Operating from 3.1 GHz to 3.5 GHz with 28 dB Gain, 8 dBm P1dB and SMA		DWG NO FMAM63010		CAGE CODE 3FKR5	
CAD FILE	041917	SHEET	SCALE	N/A	SIZE A 2233