

Type N F/M In/Out Bulkhead Coaxial RF Surge Protector, DC - 7GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube

RF surge protector (also known as lightning arrester) FMSP1041 from Fairview Microwave utilizing a proprietary gas tube surge protection technology protects critical hardware from lightening events while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All Fairview Microwave RF surge protector products are available in stock with same day shipping.

Electrical Specifications

Surge Protector Type		Gas Discharge Tube		
DC Handling		DC Pass		
Description	Min	Typ	Max	Units
Frequency Range	DC		7	GHz
Impedance		50		Ohms
VSWR		1.4:1	1.4:1	
Return Loss		15		dB
Insertion Loss		0.35		dB
Input Power, CW			90	Watts
90W @ 30MHz				
9W @ 3GHz				
Surge Current			20	kA
@ IEC 61000-4-5 8/20μs WAVEFORM				
Turn On Voltage		150		Volts

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 3	3 to 4	4 to 6.5	6.5 to 7		GHz
VSWR, Max	1.1:1	1.2:1	1.4:1	1.6:1		
IL, Max	0.1	0.25	0.35	0.6		dB

Mechanical Specifications

Size	
Length	7.1 in [180.34 mm]
Width/Diameter	2.4 in [60.96 mm]
Height	2.25 in [57.15 mm]
Weight	0.1755 lbs [79.61 g]

Configuration

Input Connector	N Female
Output Connector	N Male

Environmental Specifications

Temperature	
Operating Range	-55 to +85 deg C
Ingress Protection (IP) Rating	IP 67



Features:

- Surge current of 20kA
- Max Power 90W(RMS)
- Frequency range from DC to 7GHz
- N-type female connector to N-type male connector
- Waterproof IP67 rated
- DC Pass
- VSWR 1.4 typ
- CE & RoHS compliant
- Bi-Directional

Applications:

- WiFi
- GPS
- Land mobile radio

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

Type N F/M In/Out Bulkhead Coaxial RF Surge Protector, DC - 7GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Type N F/M In/Out Bulkhead Coaxial RF Surge Protector, DC - 7GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube FMSP1041](#)

URL: <https://www.fairviewmicrowave.com/type-n-surge-protector-7ghz-4ghz-gas-discharge-tube-fmsp1041-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

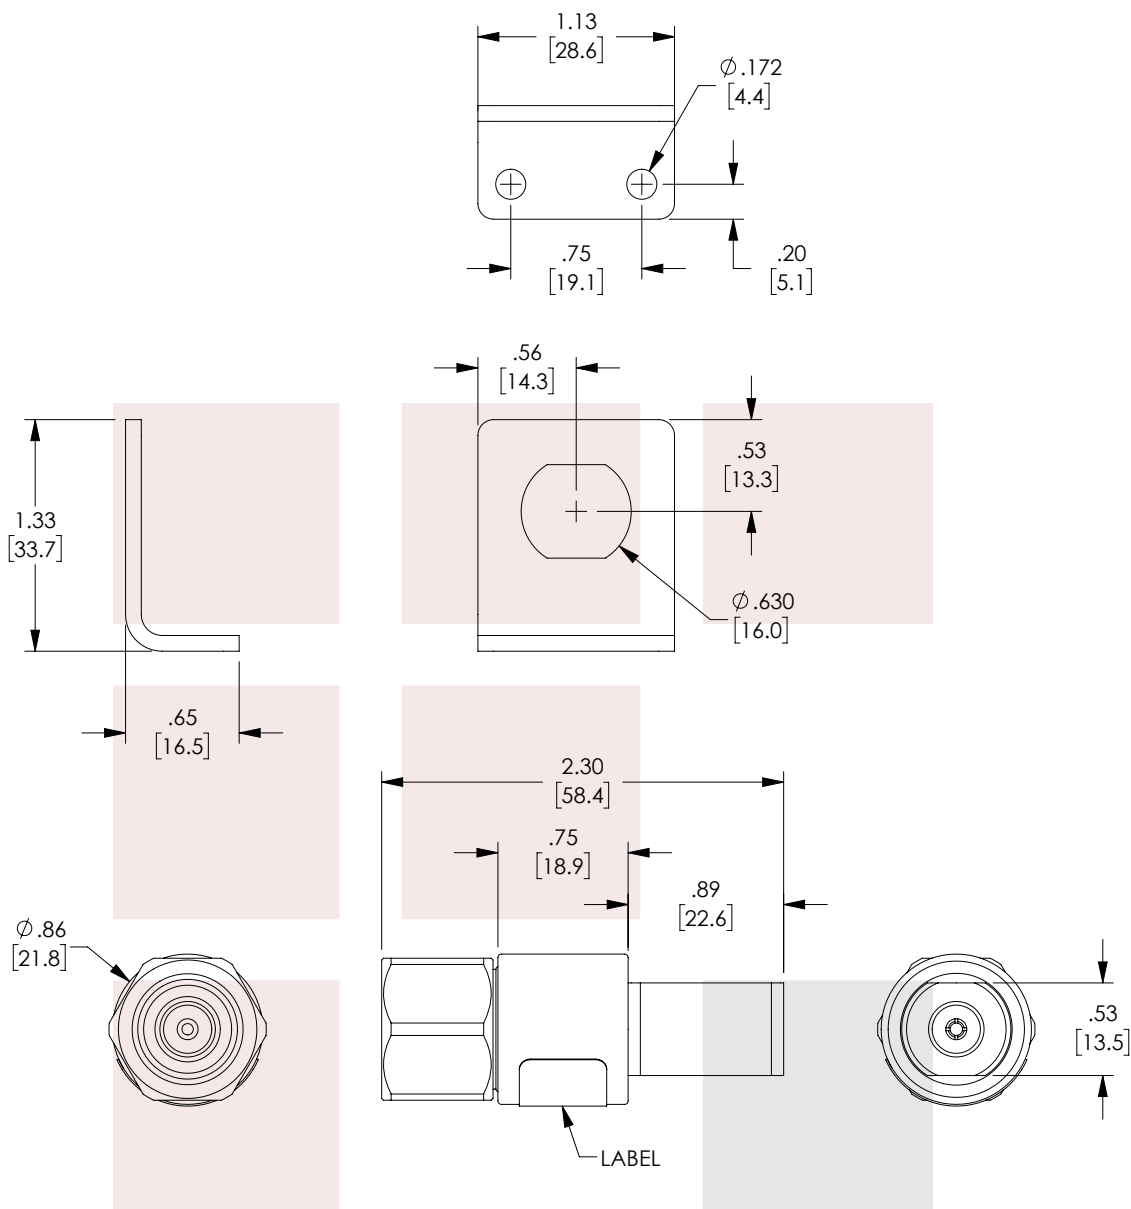

STANDARD TOLERANCES

.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

NOTES:

BRACKET AND HARDWARE INCLUDED.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

Fairview Microwave
RF COMPONENTS ON DEMAND. *Done!*

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE Type N F/M In/Out Bulkhead Coaxial RF Surge Protector, DC - 7GHz, DC Pass, 90W, IP67, 20kA, Gas Discharge Tube	DWG NO FMSP1041		CAGE CODE 3FKR5			
	CAD FILE 3/2/18	SHEET 1 OF 1	SCALE N/A	SIZE A	XXXX	