

**Conical Gain Horn Waveguide Antenna, WR-15,  
58 GHz to 68 GHz, UG-385/U Round Cover Flange,  
15 dB Nominal Gain**

Waveguide conical gain horn antennas are used in a wide variety of applications due to their high power handling capability, low loss, high directivity, and near constant electrical performance across a broad bandwidth. Fairview Microwave's FMWAN1037 WR-15 waveguide conical gain horn antenna operating from 58 GHz to 68 GHz with a nominal 15 dBi gain is part of our full line of RF components available for same-day shipping. This Fairview Microwave circular horn antenna has a gold plated brass body and a precision tolerance UG-385/U round cover flange. The FMWAN1037 WR-15 waveguide conical gain horn antenna offers low gain variation across its operating frequency range.

**Configuration**

Design	WR-15 Conical Gain Horn
Pattern	Directional
Polarization	Linear

**Electrical Specifications**

Description	Min	Typ	Max	Units
Frequency Range	58		68	GHz
Nominal Gain		15		dB
Horizontal 3dB Beam Width		36		Deg
Vertical 3dB Beam Width		30		Deg
VSWR		1.15:1		

**Mechanical Specifications**

<b>Size</b>	
Length	1.41 in [35.81 mm]
Width/Diameter	0.75 in [19.05 mm]
Height	0.75 in [19.05 mm]
Weight	0.046 lbs [20.87 g]

**Waveguide Interface**

Waveguide Size	WR-15
Flange Type	Round Cover
Flange Designation	UG-385/U
Body Material and Plating	Brass, Gold



**Features:**

- Circular Waveguide Interface
- 58 GHz to 68 GHz
- 15 dBi Nominal Gain
- UG-385/U Round Cover Flange

**Applications:**

- Antenna Measurements
- Wireless Communication
- Laboratory Use
- Microwave Radio Systems


**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

### Typical Performance Data

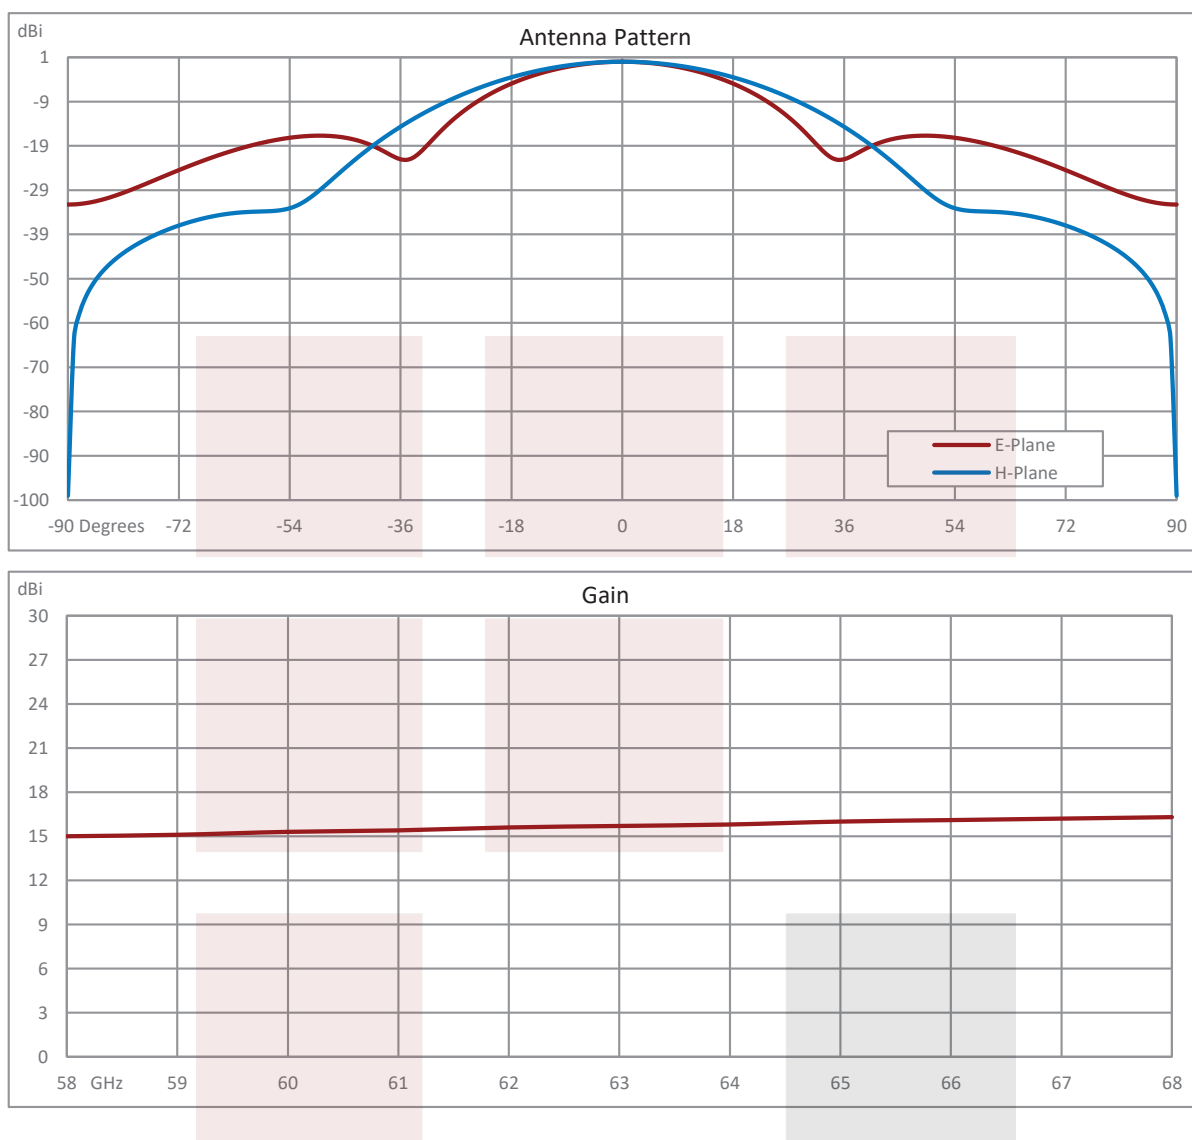


Conical Gain Horn Waveguide Antenna, WR-15, 58 GHz to 68 GHz, UG-385/U Round Cover Flange, 15 dB Nominal Gain from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Conical Gain Horn Waveguide Antenna, WR-15, 58 GHz to 68 GHz, UG-385/U Round Cover Flange, 15 dB Nominal Gain FMWAN1038](https://www.fairviewmicrowave.com/wr-15-waveguide-standard-gain-horn-15-db-ug-385-fmwan1038-p.aspx)

URL: <https://www.fairviewmicrowave.com/wr-15-waveguide-standard-gain-horn-15-db-ug-385-fmwan1038-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

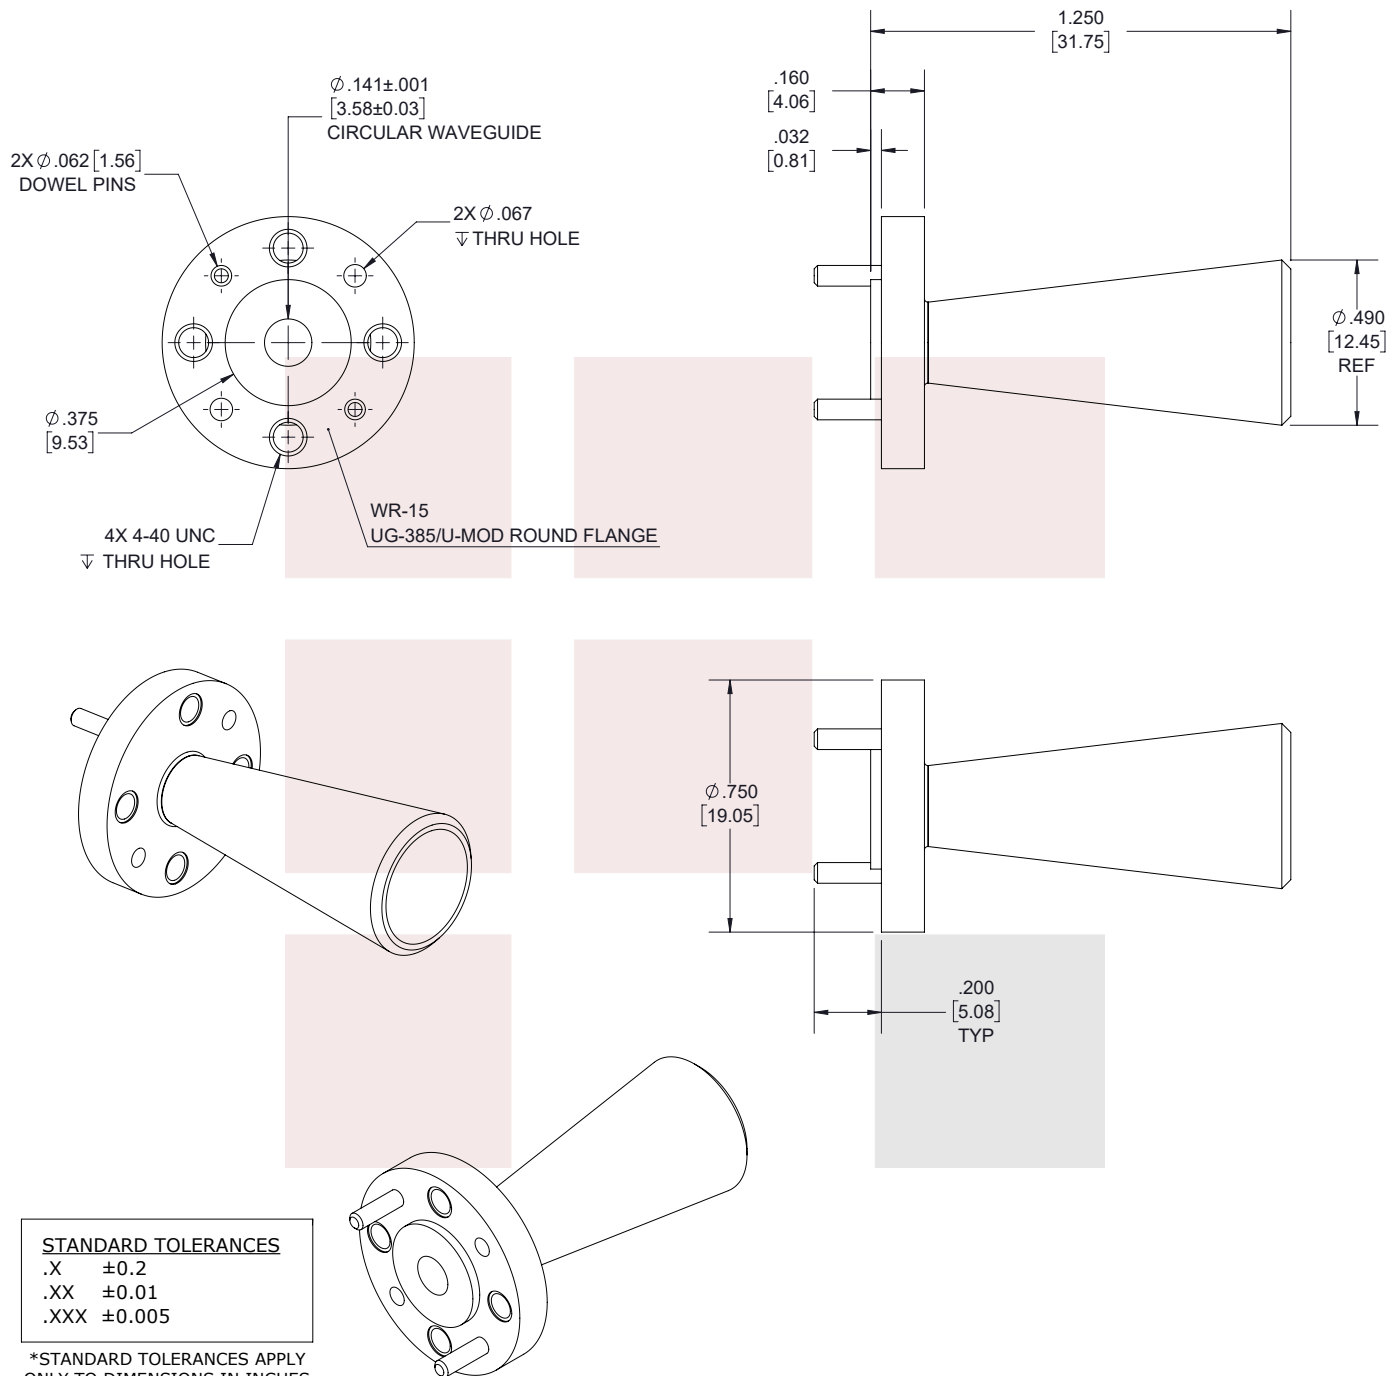

<b>Fairview Microwave</b> <b>RF COMPONENTS ON DEMAND.</b> <i>Done!</i>		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
<b>TITLE</b>  Conical Gain Horn Waveguide Antenna, WR-15, 58 GHz to 68 GHz, UG-385/U Round Cover Flange, 15 dB Nominal Gain	<b>DWG NO</b>  FMWAN1038		<b>CAGE CODE</b>  3FKR5			
	<b>CAD FILE</b> 02/22/19	<b>SHEET</b> 1 OF 1	<b>SCALE</b> N/A	<b>SIZE</b> A	7361	