

WR-112 to Type N Female Waveguide to Coax Adapter CMR-112 with 7.05 GHz to 10 GHz H Band in Aluminum, Paint

The FMWCA1043 is a waveguide to coaxial adapter operating in the H Band with a 7.05 to 10 GHz frequency range. This adapter offers a WR-112 waveguide interface size using a standard CMR-112 Flange. The FMWCA1043 is constructed of Aluminum Alloy and painted to ensure durability. The coaxial connector offered by this adapter uses a N Female Connector.

Configuration

Waveguide Size	WR-112
Flange	CMR-112
RF Connector	N Female
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	7.05		10	GHz
VSWR		1.25:1		

Mechanical Specifications

RF Connector	
Connector Type	N Female
Waveguide Interface	
Waveguide Type	WR-112
Flange Type	CMR-112
Body Material and Plating	Aluminum, Paint

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

- Notes:
- Values at +25 °C, sea level unless stated otherwise



Features:


- H Band
- 7.05 to 10 GHz Frequency Range
- WR-112 Waveguide Interface
- CMR-112 Flange
- N Female RF Interface
- Right Angle

Applications:

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

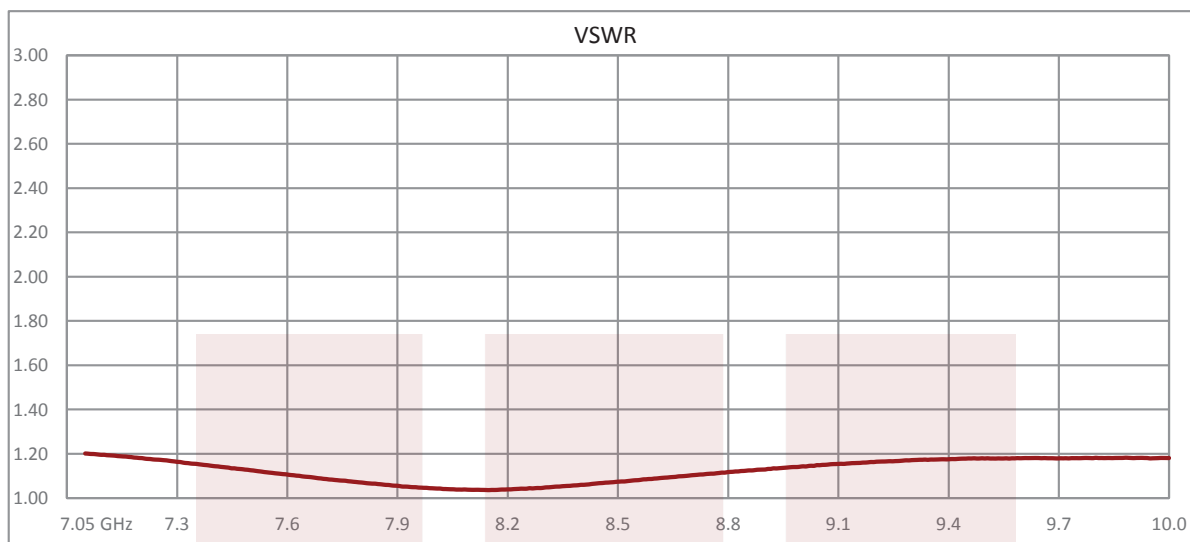


WR-112 to Type N Female Waveguide to Coax Adapter CMR-112 with 7.05 GHz to 10 GHz H Band in Aluminum, Paint from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-112 to Type N Female Waveguide to Coax Adapter CMR-112 with 7.05 GHz to 10 GHz H Band in Aluminum, Paint FMWCA1043](https://www.fairviewmicrowave.com/wr112-type-n-female-waveguide-coax-adapter-cmr-112-fmwca1043-p.aspx)

URL: <https://www.fairviewmicrowave.com/wr112-type-n-female-waveguide-coax-adapter-cmr-112-fmwca1043-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

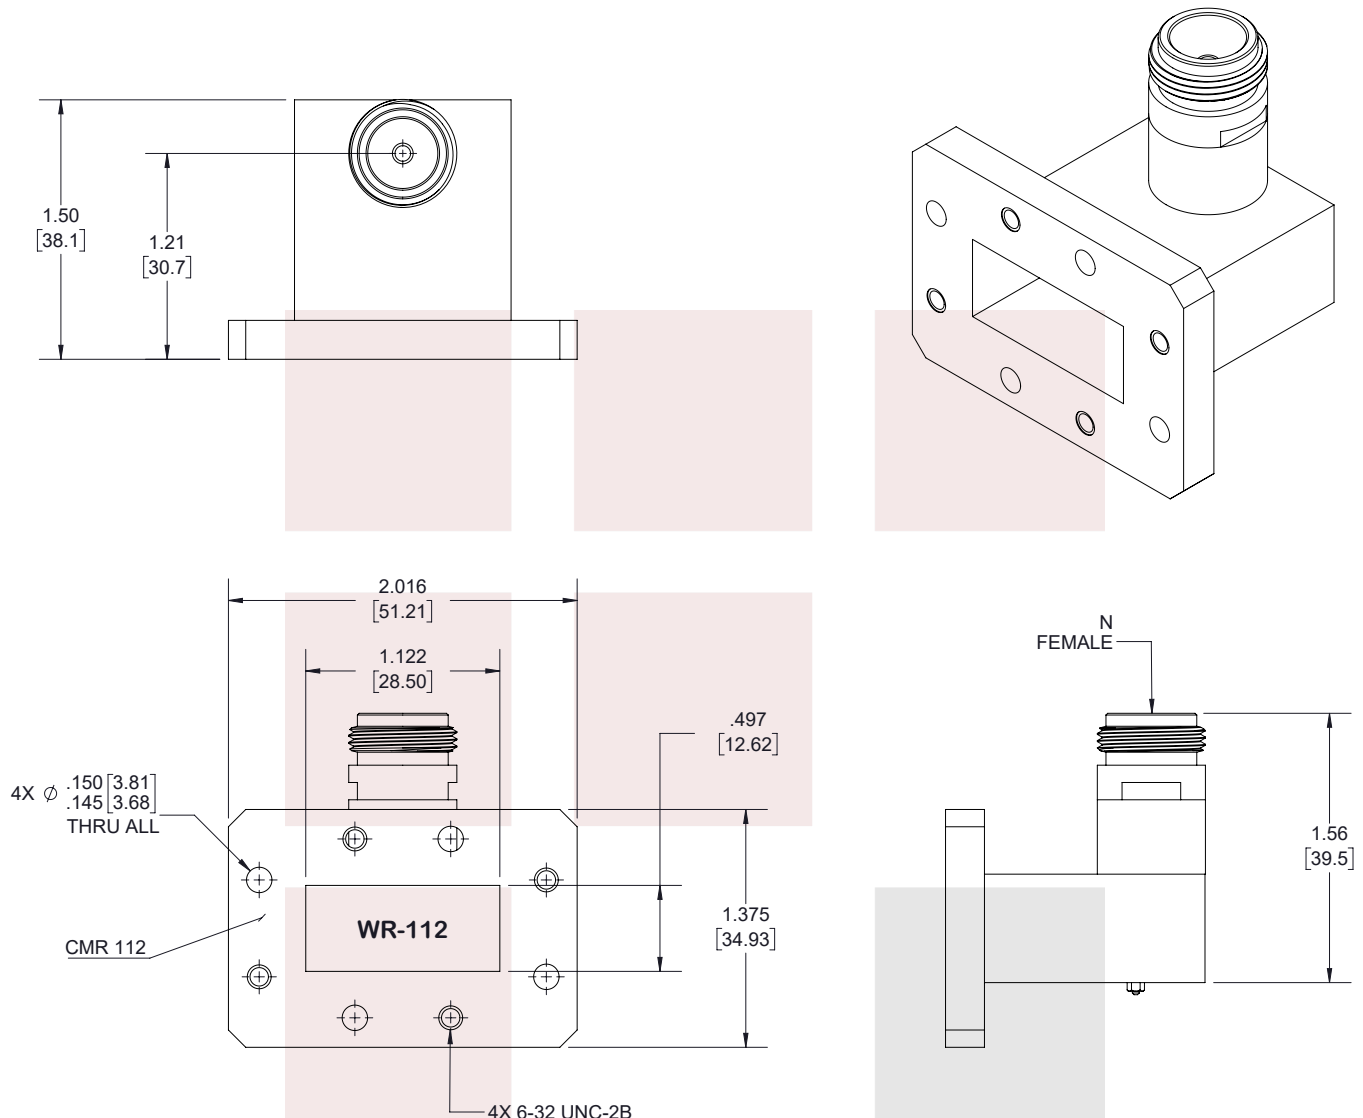

STANDARD TOLERANCES

.X ± 0.2
.XX ± 0.01
.XXX ± 0.005

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE
WR-112 to Type N Female Waveguide to Coax
Adapter CMR-112 with 7.05 GHz to 10 GHz H Band in
Aluminum, Paint

DWG NO FMWCA1043		CAGE CODE 3FKR5		
CAD FILE	10/02/18	SHEET	1 OF 1	SCALE N/A
				SIZE A
				7361