MABACT0062



1:1 Transformer

3 - 200 MHz Rev. V6

Features


- 1:1 Impedance Ratio
- Surface Mount Package
- Excellent Temperature Stability
- Can be used in both 50 Ω & 75 Ω Systems
- 260°C Reflow Compatible
- RoHS Compliant Version of ETC1-1T & MABACT0012
- · Available on Tape & Reel

Description

MABACT0062 is a 1:1 RF flux coupled transformer in a surface mount package.

Ideally suited for high volume CATV/Broadband applications.

Schematic

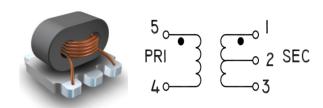

Pin Configuration

Pin #	Function		
1	Secondary Dot		
2	Secondary CT		
3	Secondary		
4	Primary		
5	Primary Dot		

Electrical Specifications: $T_A = 25$ °C, $Z_0 = 50 \Omega P_{IN} = 0 dBm$

Parameter	Frequency Test Conditions (MHz)	Units	Min.	Тур.	Max.
Insertion Loss	3 - 50 50 - 160 160 - 200	dB	_	0.2 0.5 0.8	0.5 1.0 1.2
Amplitude Balance (Nominal 0 dB)	3 - 50 50 - 200	dB	_	0.02 0.06	±0.1 ±0.5
Phase Balance (Nominal 180°)	3 - 50 50 - 200	0	_	0.2 0.5	±1.5 ±5.0
Input Return Loss	3 - 200 5 - 100	dB	10 15	20 25	_

Electrical Specifications: $T_A = 25$ °C, $Z_0 = 75 \Omega P_{IN} = 0 dBm$

Parameter	Frequency Test Conditions (MHz)	Units	Min.	Тур.	Max.
Insertion Loss	3 - 5 5 - 65 65 - 200	dB	_	0.5 0.4 0.6	1.0 0.6 1.0
Amplitude Balance (Nominal 0 dB)	3 - 65 65 - 200	dB	_	0.02 0.04	±0.2 ±0.3
Phase Balance (Nominal 180°)	3 - 65 65 - 200	o	_	0.4 1.2	±2.0 ±5.0
Input Return Loss	3 - 5 5 - 65 65 - 100 100 - 200	dB	18 21 19 14	24 29 25 20	_

1

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit www.macom.com for additional data sheets and product information.

MABACT0062



1:1 Transformer

3 - 200 MHz Rev. V6

Ordering information

Part #	Description	
MABACT0062	2000 piece reel	
MABA-008115-CT62TB	Customer Test Board	


Reference Application Note M513 for reel size information.

Recommended Maximum Ratings


Parameter	Value
Input Power	250 mW
DC Current	200 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

Typical Performance Curves: $T_A = 25^{\circ}C$, $Z_0 = 50 \Omega P_{IN} = 0 dBm$


Insertion Loss

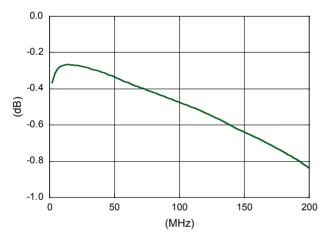


Input Return Loss

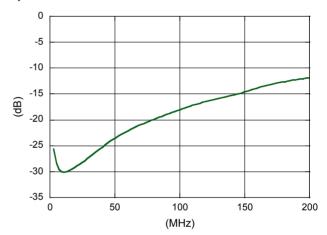

Amplitude Balance

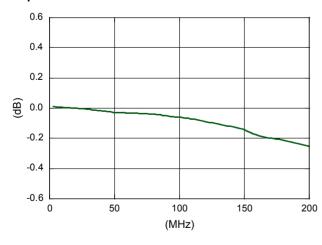

Phase Balance

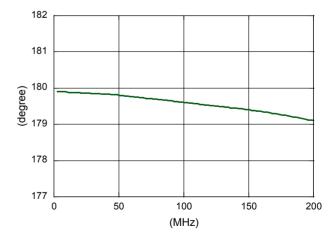




1:1 Transformer


3 - 200 MHz Rev. V6

Outline Drawing

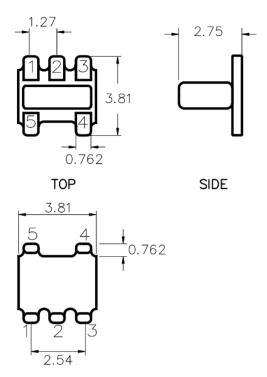

- Dimensions in mm.
- Tolerance: ±0.2 mm unless otherwise noted.
- Model number and lot code are printed on the reel.

Recommended Footprint



Tape & Reel Information

Parameter	Units	Value	
Qty per reel	-	2000	
Reel Size	mm	330	
Tape Width	mm	12.00	
Pitch	mm	8.00	
Ao	mm	4.00	
Во	mm	4.00	
Ko	mm	2.90	
Orientation	-	F5	
Reference Application Note ANI-019 for orientation			

Reference Application Note ANI-019 for orientation

MABACT0062



1:1 Transformer

3 - 200 MHz Rev. V6

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

4