

MC0512-10 DATA SHEET

SMA Directional Coupler 10 dB Coupled Port From 500 MHz to 12.4 GHz Rated To 30 Watts

Directional couplers are indispensable components for isolating, separating and combining signals. For example, they provide a simple way of sampling microwave signals. They also can make accurate attenuator measurements since reflections are eliminated. The MC0512-10 is a 10 dB directional coupler that operates from 500 MHz to 12.4 GHz with 15 dB directivity minimum and can handle up to 30 Watts of CW power. The package interface has SMA inputs on all of the ports.

The MC0512-10 is part of Fairview Microwave's family of directional/dual-directional couplers that offer coupling ratio up to 50 dB with excellent performance featuring high directivity, low insertion loss and VSWR. They are available in both narrow and broad bandwidths and can be used in a wide variety of applications including signal sampling, VSWR measurements, power combining and distribution.

Electrical Specifications

Description	Min		Тур	Max	Units	
Frequency Range	0.5			12.4	GHz	
Impedance			50		Ohms	
Coupling		10	±1.2	5	dB	
Freq. Sensitivity			±1		dB	
Insertion Loss				2	dB	
Directivity	15				dB	
Main Line VSWR				1.22:1		
Sec. Line VSWR				1.22:1		
Input Power (CW)				30	Watts	

Performance by Frequency

Input Power (Peak)

Description	F1	F2	F3	F4	F5	Units
Frequency Range	0.5 to 4	4 to 8	8 to 12.4			GHz
Insertion Loss, Typ	0.96	1.16	1.59			dB
Directivity, Typ	20	17	17			dB

3

KWatts

Electrical Specification Notes: Values specified at +25°C, sea level. Coupling inludes frequency sensitivity. Power rating is specified for a load VSWR of 1.2:1 or better.

Mechanical Specifications

Size

 Length
 4.4 in [111.76 mm]

 Width/Dia.
 0.6 in [15.24 mm]

 Height
 0.38 in [9.65 mm]

 Weight
 0.144 lbs [65.32 g]

Configuration

Input Connector SMA Female



Features:

- Directional Coupler
- 500 MHz to 12.4 GHz Frequency Range
- Coupling 10±1.25 dB
- Directivity > 15 dB
- Max Power 30W (CW)

Applications:

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






Output Connector SMA Female Coupled Connectors SMA Female

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

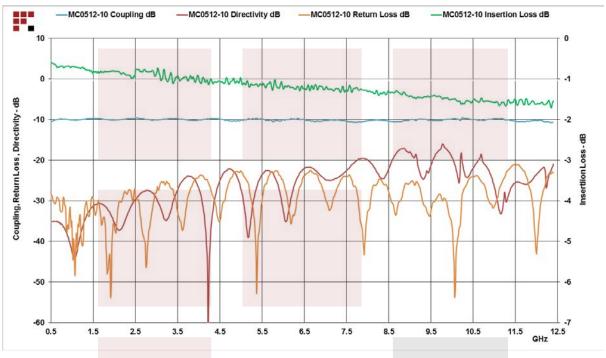

SMA Directional Coupler 10 dB Coupled Port From 500 MHz to 12.4 GHz Rated To 30 Watts from Fairview Microwave is instock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: SMA Directional Coupler 10 dB Coupled Port From 500 MHz to 12.4 GHz Rated To 30 Watts MC0512-10

URL: https://www.fairviewmicrowave.com/sma-directional-coupler-10-db-12.4-ghz-50-watts-mc0512-10-p.aspx


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016 REV 4.1 Page 2 of 3





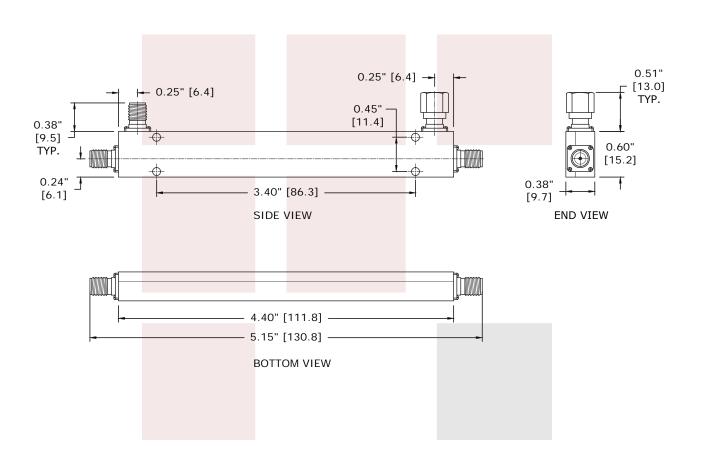

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
SMA Directional Coupler 10 dB Coupled Port From 500 MHz to 12.4 GHz Rated To 30 Watts	DWG NO MC0512-10			CAGE CODE 3FKR5		
	CAD FILE 011415	SHEET	SCALE	E N/A	SIZE A	5568