Technical Data Sheet



SP3T Ramses SMA2.9 40GHz Normally open Indicators 12Vdc TTL

Diodes Pins Terminals

PAGE 1/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R573812320

RF CHARACTERISTICS

Number of ways : 3

Frequency range : 0 - 40 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 6	6 - 12.4	12.4 - 18	18 - 26.5	26.5 - 40
VSWR max	1.30	1.40	1.50	1.70	2.20
Insertion loss max	0.20 dB	0.40 dB	0.50 dB	0.70 dB	1.10 dB
Isolation min	70 dB	60 dB	60 dB	55 dB	50 dB
Average power (*)	40 W	30 W	25 W	15 W	5 W

ELECTRICAL CHARACTERISTICS

Actuator : NORMALLY OPEN

Nominal current ** : 250 mA

Actuator voltage (Vcc) : 12V (10.2 to 13V)

Terminals : solder pins (250°C max. / 30 sec.)

Indicator rating : 1 W / 30 V / 100 mA

TTL inputs (E) - High level : 2.2 to 5.5 V / 800 μ A at 5.5 V

- Low level : 0 to 0.8 V / 20µA at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA 2.9 female per MIL-C 39012
Life : 2 million cycles per position

Switching Time*** : < 15 msConstruction : Splashproof
Weight : < 220 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage; 25° C)








SP3T Ramses SMA2.9 40GHz Normally open Indicators 12Vdc TTL


Diodes Pins Terminals

PAGE 2/2 ISSUE 22-03-22 SERIE : SPNT PART NUMBER : R573812320

DRAWING



TTL input	RF Continuity	Ind.
E1 = 1	$IN \leftrightarrow 1$	D.E
E2 = 1	$IN \leftrightarrow 2$	D.F
E3 = 1	$IN \leftrightarrow 3$	D.G




General tolerances: ±0,5 mm [0,02 in]

LABEL TOP O D F2 TOP O D F2 RADIALL® R573812320 0 - 40 GHz Un : 12V Lot : ____ 1 2



SCHEMATIC DIAGRAM

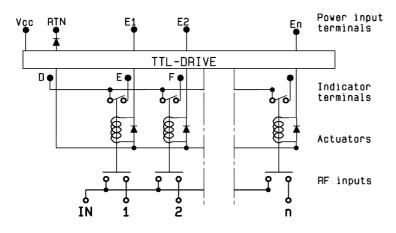

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.