



2 Way N Power Divider From 10 MHz to 1,000 MHz Rated at 1 Watt

Power Dividers Technical Data Sheet

PE2047

Features

- 2-Way Power Divider
- Reactive Design
- 10 to 1,000 MHz Frequency Range
- Max Power 1 Watt (CW)
- Insertion Loss < 1.5 dB
- Isolation > 20 dB

Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and Wilkinson power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types such as 2.92mm, BNC, N and SMA.

The PE2047 is a 2-way reactive power divider that operates from 10 to 1,000 MHz and can handle up to 1 Watt (CW) with 1.5 dB max insertion loss and 20 dB min isolation. The package interface uses N female connectors and is REACH and RoHS compliant.

Electrical Specifications

Design: Reactive
 Number of Output Ports: 2

Description	Minimum	Typical	Maximum	Units
Frequency Range	10		1,000	MHz
Impedance		50		Ohms
Input VSWR			1.5:1	
Output VSWR			1.5:1	
Insertion Loss			1.5	dB
Isolation	20			dB
Amplitude Balance			0.3	dB
Phase Balance			3	Degrees
Input Power (CW)			1	Watts

Electrical Specification Notes:
 Max input power rated for load VSWR better than 1.20:1.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Power Divider From 10 MHz to 1,000 MHz Rated at 1 Watt PE2047](#)



2 Way N Power Divider From 10 MHz to
1,000 MHz Rated at 1 Watt

Power Dividers Technical Data Sheet

PE2047

Mechanical Specifications

Size

Length	1.67 in [42.42 mm]
Width	1.75 in [44.45 mm]
Height	0.93 in [23.62 mm]
Weight	0.302 lbs [136.98 g]

Configuration

Package Type	Connectorized
Input Connector	N Female
Output Connectors	N Female

Environmental Specifications

Temperature

Operating Range	-25 to +80 deg C
Storage Range	-55 to +150 deg C

Humidity

MIL-STD-202, Method 106 (90% relative humidity, +65°C)

Shock

MIL-STD-202, Method 213/I (100 G's, 6 ms)

Vibration

MIL-STD-202, Method 204/D (10 to 2,000 Hz, 20 G's, 12 hours)

Altitude

MIL-STD-202, Method 105/E (150,000 feet)

Thermal Shock

MIL-STD-202, Method 107/B (-55°C to +85°C)

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

Plotted and Other Data

Notes:

2 Way N Power Divider From 10 MHz to 1,000 MHz Rated at 1 Watt from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Power Divider From 10 MHz to 1,000 MHz Rated at 1 Watt PE2047](#)

URL: <http://www.pasternack.com/4-way-n-reactive-power-divider-10-mhz-1000-mhz-10-watts-pe2047-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE2047 CAD Drawing

2 Way N Power Divider From 10 MHz to 1,000 MHz Rated at 1 Watt

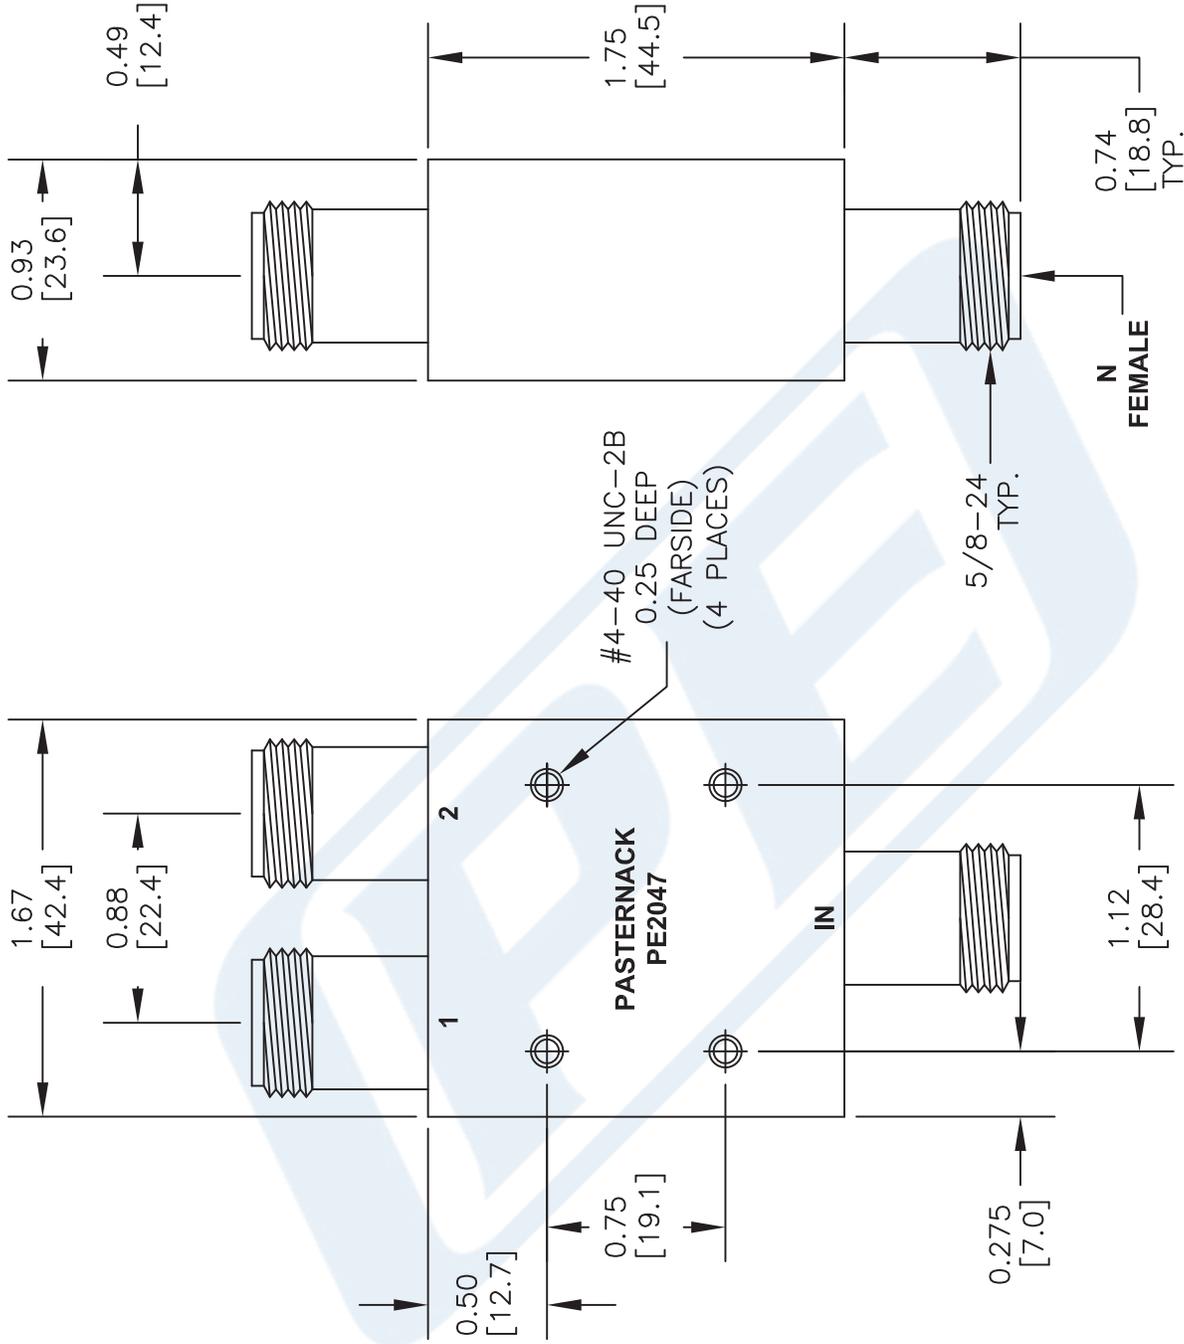

STANDARD TOLERANCES
 DECIMAL ±0.02
 .XX ±0.010
 .XXX ±0.010

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE2047

FSCM NO. 53919

CAD FILE 050616

SCALE N/A

SIZE A

3045

PE PASTERNAK
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com