



## BNC Male Non-Shorting Dust Cap With 2.9 Inch Chain

### Shorts and Caps Technical Data Sheet

PE6013

#### Features

- Protects against dust and contaminants
- Protects against physical damage
- Nickel Plated Body
- Chain Included

#### Applications

- General Purpose Laboratory Use
- Test and Measurement

#### Description

Pasternack's PE6013 connector dust cap has a BNC interface and a male gender. Our BNC male dust cap is a non-shorting design with a nickel plated body to ensure durability. The Pasternack non-shorting BNC connector cap comes with a 2.9 inch chain and is part of over 40,000 RF, microwave and millimeter wave products that ship the same day.

RF connector dust caps are essential for precision connectors, protecting them from dust, corrosion and potential damage especially to test and measurement equipment. Specific RF connector cap models come with a chain to prevent loss or misplacement. Internal short connector cap versions are available to protect equipment from a spike in current caused by electrostatic discharge (ESD).

#### Mechanical Specifications

##### Configuration

Connector BNC Male Non-Shorting  
Chain Option 2.9 in Chain

Description	Material	Plating
Body	Brass	Nickel 100µ" min.
Gasket	Silicone	
Chain	Brass	Nickel
Rivet	Brass	Nickel

##### Size

Length 0.57 in [14.48 mm]  
Width 0.72 in [18.29 mm]  
Weight 0.02 lbs [9.07 g]

#### Environmental Specifications

##### Temperature

Operating Range -65 to +165 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Non-Shorting Dust Cap With 2.9 Inch Chain PE6013](#)



## BNC Male Non-Shorting Dust Cap With 2.9 Inch Chain

### Shorts and Caps Technical Data Sheet

PE6013

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

REACH Compliant

12/17/2015

#### Plotted and Other Data

Notes:

BNC Male Non-Shorting Dust Cap With 2.9 Inch Chain from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Non-Shorting Dust Cap With 2.9 Inch Chain PE6013](#)

URL: <https://www.pasternack.com/50-ohm-bnc-male-non-shorting-cap-with-2.5-inch-chain-pe6013-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE6013 CAD Drawing

BNC Male Non-Shorting Dust Cap With 2.9 Inch Chain

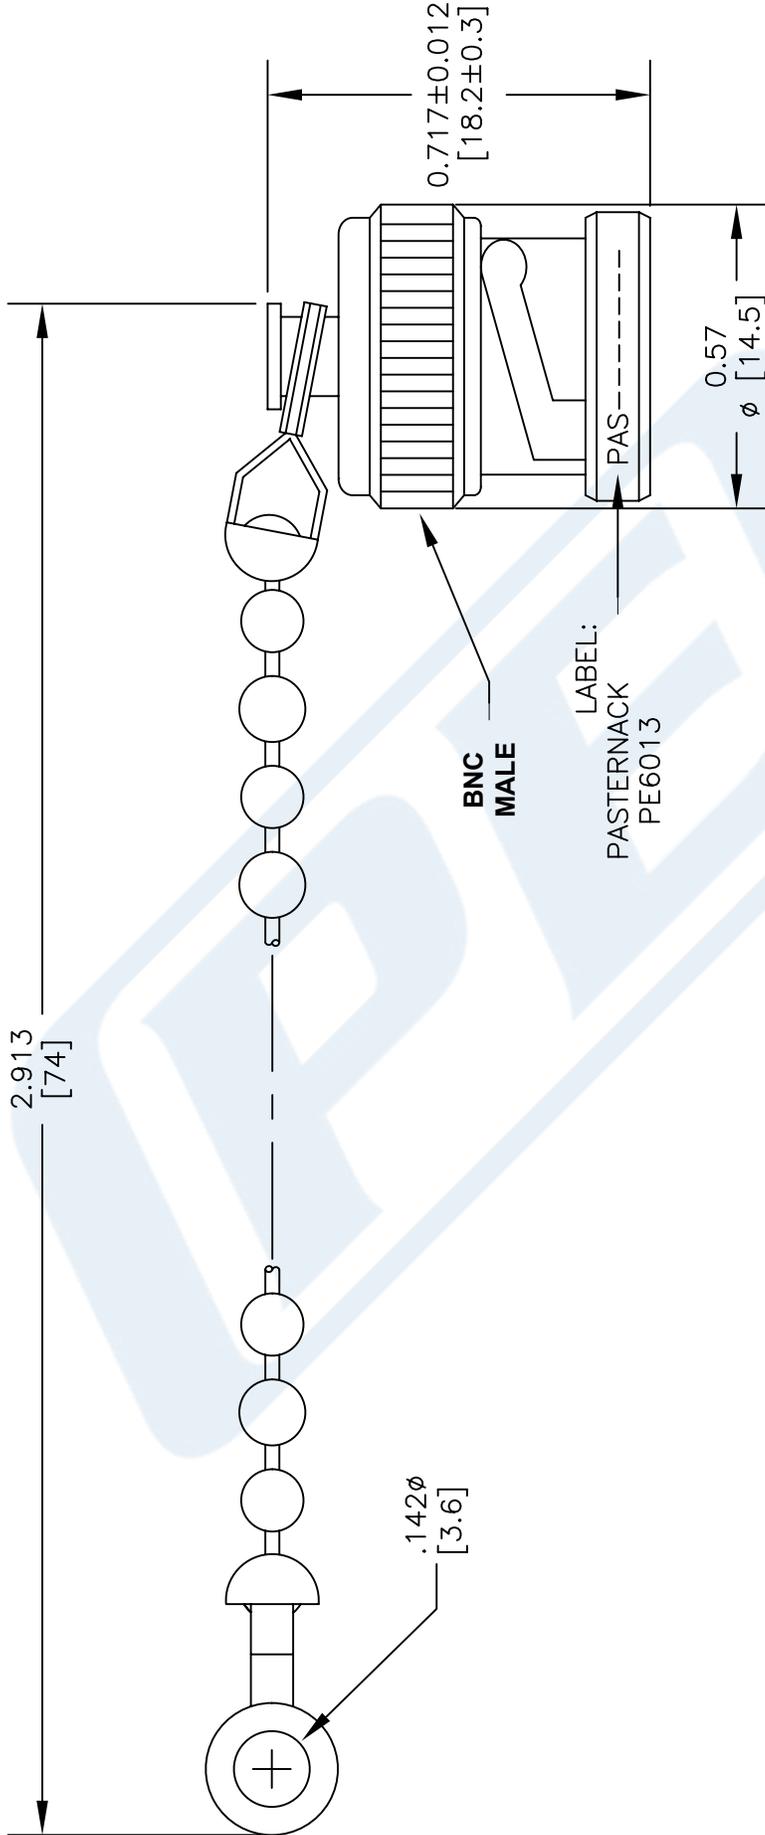

## STANDARD TOLERANCES

.X  $\pm$ 0.2  
 .XX  $\pm$ 0.1  
 .XXX  $\pm$ 0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

DWG TITLE

**PE6013**

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 051616

SCALE N/A

SIZE A

3045