



Connectors > Contacts > Connector Contacts



Contact Type: **Pin**
Contact Mating Area Plating Material: **Precious Metal**
Wire Contact Termination Area Plating Material: **Tin**
Contact Retention Within Housing: **With**
Contact Retention Type Within Housing: **Locking Lance**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Contact Features

Contact Underplating Material	Nickel
Contact Orientation	Straight
Mating Pin Diameter	1.57 mm[.062 in]
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Round
Wire Contact Termination Area Plating Thickness	1.27 µm[50 µin]
Barrel Type	Open
Contact Mating Area Plating Material Finish	Bright
Contact Type	Pin
Contact Mating Area Plating Material	Precious Metal



Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Size	Size 16
Contact Base Material	Brass
Contact Current Rating (Max)	13 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Locking Lance

Dimensions

Compatible Insulation Diameter Range	.36 – .76 mm [.014 – .03 in]
Wire Size	.05 – .15 mm²

Usage Conditions

Operating Temperature Range	-55 – 150 °C [-67 – 302 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Identification Marking

Contact Color Code	Brown
--------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, IEC, UL
---	--------------

Packaging Features

Packaging Quantity	1000
Packaging Method	Box & Carton, Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JAN 2025
(247)
Candidate List Declared Against: JAN 2025
(247)
Does not contain REACH SVHC


Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

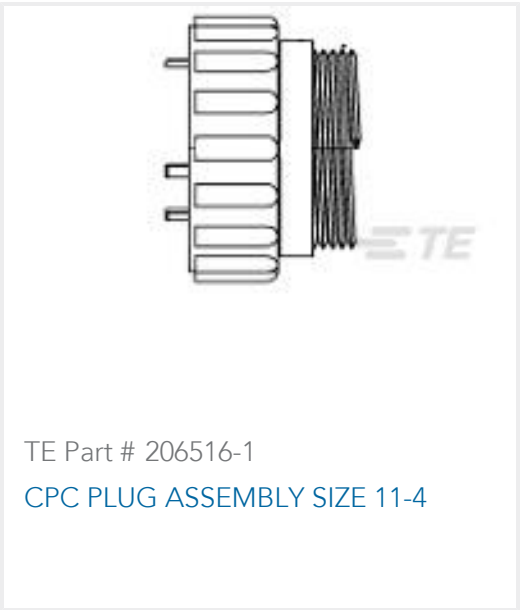



TE Part # 796274-1
SLD CPC PLUG ASSY,17-16,STD SX



TE Part # 796274-2
SLD CPC PLUG ASSY,17-16,STD SX



TE Part # 796188-1
SLD CPC PLUG ASSY,23-24,STD SX



TE Part # 796271-1
SLD CPC PLUG ASSY,17-14,REV SX



TE Part # 208488-3
CMC PLUG ASSEMBLY,SZ 22



TE Part # 211766-1
CPC PLUG ASSEMBLY SIZE 17-9



TE Part # 211772-1
CPC PLUG ASSEMBLY SIZE 23-19



TE Part # 213852-1
CPC PLUG ASSEMBLY SIZE 23-19




TE Part # 208714-2
CMC PLUG ASSEMBLY,SZ 14-7



TE Part # 206060-1
CPC PLUG ASSEMBLY SIZE 11-4



TE Part # 206305-1
CPC PLUG ASSEMBLY SIZE 23-37



TE Part # 206554-1
CPC PLUG ASSEMBLY SIZE 17-16

Also in the Series | AMP Type III+



Connector Contacts(260)



Insertion & Extraction Tools(4)



Power Contacts(260)

Also in the Series | Circular Plastic Connectors Series 1



Circular Power Connectors(211)



Connector Contacts(260)



Power Contacts(260)

Customers Also Bought



TE Part #206070-8
CABLE CLAMP KIT #17




TE Part #34107
SOLIS R 22-16 COMM 22-18 MIL 6



TE Part #66262-2
MALE CONTACT ASSY. (L.P.)



TE Part #201359-1
MALE BLOCK 26 P. SER. "M"

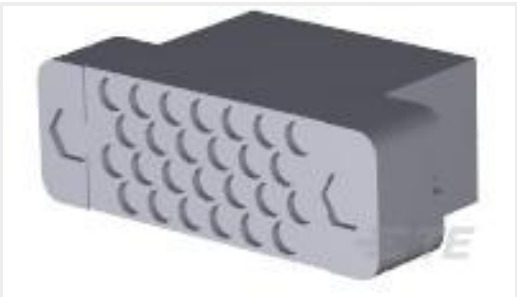

TE Part #200512-2
FEMALE BLOCK 26 PL.




TE Part #7-1393254-4
W92-X112-25=M6/M7/M9/W6/W7



TE Part #5-747916-2
37 Plug Solder Cup, Gold Flash



TE Part #6-1625984-3
HSA50 4K7 5%

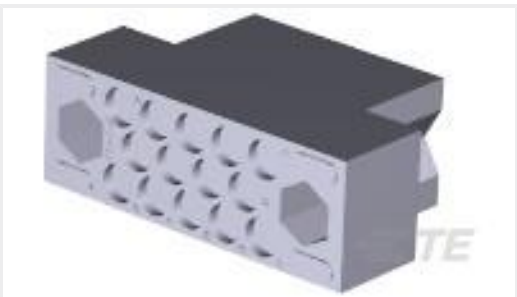

TE Part #201298-1
FEMALE BLOCK 14 PL.



TE Part #770985-3
MINI UMNL PIN 26-22AWG AU LP

Documents

Product Drawings

III+ PIN,30-26,30AU/FL,LP

English

CAD Files

Customer View Model

ENG_CVM_CVM_66406-4_K.2d_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG_CVM_CVM_66406-4_K.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_66406-4_K.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMP Circular Connectors for Commercial Signal & Power Applications](#)

English

[Signal Contacts](#)

English

[M_SERIES_PIN_AND_SOCKET_CONNECTORS](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

Japanese

[Instruction Sheet \(U.S.\)](#)

English