



power contactor, AC-3e/AC-3 400 A, 200 kW / 400 V AC (50-60 Hz) / DC Uc: 96-127 V PLC input 24 V DC 3-pole, auxiliary contacts 2 NO + 2 NC drive: electronic main circuit: busbar control and auxiliary circuit: spring-loaded terminal

| | |
|--------------------------------------------------------------------------------------------------------------|----------------------------|
| product brand name | SIRIUS |
| product designation | Power contactor |
| product type designation | 3RT1 |
| General technical data | |
| size of contactor | S12 |
| product extension | |
| • function module for communication | No |
| • auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 105 W |
| • at AC in hot operating state per pole | 35 W |
| • without load current share typical | 3.6 W |
| insulation voltage | |
| • of main circuit with degree of pollution 3 rated value | 1 000 V |
| • of auxiliary circuit with degree of pollution 3 rated value | 500 V |
| surge voltage resistance | |
| • of main circuit rated value | 8 kV |
| • of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 690 V |
| shock resistance at rectangular impulse | |
| • at AC | 8,5g / 5 ms, 4,2g / 10 ms |
| • at DC | 8,5g / 5 ms, 4,2g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 13,4g / 5 ms, 6,5g / 10 ms |
| • at DC | 13,4g / 5 ms, 6,5g / 10 ms |
| mechanical service life (operating cycles) | |
| • of contactor typical | 10 000 000 |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000 |
| • of the contactor with added auxiliary switch block typical | 10 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitation (Date) | 05/01/2012 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |

| Main circuit | |
|-------------------------------------------------------------------|---------------------|
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| operating voltage | |
| • at AC-3 rated value maximum | 1 000 V |
| • at AC-3e rated value maximum | 1 000 V |
| operational current | |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value | 430 A |
| • at AC-1 | |
| — up to 690 V at ambient temperature 40 °C rated value | 430 A |
| — up to 690 V at ambient temperature 60 °C rated value | 400 A |
| — up to 1000 V at ambient temperature 40 °C rated value | 200 A |
| — up to 1000 V at ambient temperature 60 °C rated value | 200 A |
| • at AC-3 | |
| — at 400 V rated value | 400 A |
| — at 500 V rated value | 400 A |
| — at 690 V rated value | 400 A |
| — at 1000 V rated value | 180 A |
| • at AC-3e | |
| — at 400 V rated value | 400 A |
| — at 500 V rated value | 400 A |
| — at 690 V rated value | 400 A |
| — at 1000 V rated value | 180 A |
| • at AC-4 at 400 V rated value | 350 A |
| • at AC-5a up to 690 V rated value | 378 A |
| • at AC-5b up to 400 V rated value | 332 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=20 rated value | 395 A |
| — up to 400 V for current peak value n=20 rated value | 395 A |
| — up to 500 V for current peak value n=20 rated value | 395 A |
| — up to 690 V for current peak value n=20 rated value | 395 A |
| — up to 1000 V for current peak value n=20 rated value | 180 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 264 A |
| — up to 400 V for current peak value n=30 rated value | 264 A |
| — up to 500 V for current peak value n=30 rated value | 264 A |
| — up to 690 V for current peak value n=30 rated value | 264 A |
| — up to 1000 V for current peak value n=30 rated value | 180 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 300 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 150 A |
| • at 690 V rated value | 135 A |
| operational current | |
| • at 1 current path at DC-1 | |
| — at 24 V rated value | 400 A |
| — at 60 V rated value | 330 A |
| — at 110 V rated value | 33 A |
| — at 220 V rated value | 3.8 A |
| — at 440 V rated value | 0.9 A |
| — at 600 V rated value | 0.6 A |
| • with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 400 A |
| — at 60 V rated value | 400 A |
| — at 110 V rated value | 400 A |

| | |
|-------------------------------------------------------------------------|-------------|
| — at 220 V rated value | 400 A |
| — at 440 V rated value | 4 A |
| — at 600 V rated value | 2 A |
| ● with 3 current paths in series at DC-1 | |
| — at 24 V rated value | 400 A |
| — at 60 V rated value | 400 A |
| — at 110 V rated value | 400 A |
| — at 220 V rated value | 400 A |
| — at 440 V rated value | 11 A |
| — at 600 V rated value | 5.2 A |
| ● at 1 current path at DC-3 at DC-5 | |
| — at 24 V rated value | 400 A |
| — at 60 V rated value | 11 A |
| — at 220 V rated value | 0.6 A |
| — at 440 V rated value | 0.18 A |
| — at 600 V rated value | 0.125 A |
| ● with 2 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 400 A |
| — at 60 V rated value | 400 A |
| — at 110 V rated value | 400 A |
| — at 220 V rated value | 2.5 A |
| — at 440 V rated value | 0.65 A |
| — at 600 V rated value | 0.37 A |
| ● with 3 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 400 A |
| — at 60 V rated value | 400 A |
| — at 110 V rated value | 400 A |
| — at 220 V rated value | 400 A |
| — at 440 V rated value | 1.4 A |
| — at 600 V rated value | 0.75 A |
| operating power | |
| ● at AC-3 | |
| — at 230 V rated value | 132 kW |
| — at 400 V rated value | 200 kW |
| — at 500 V rated value | 250 kW |
| — at 690 V rated value | 400 kW |
| — at 1000 V rated value | 250 kW |
| ● at AC-3e | |
| — at 230 V rated value | 132 kW |
| — at 400 V rated value | 200 kW |
| — at 500 V rated value | 250 kW |
| — at 690 V rated value | 400 kW |
| — at 1000 V rated value | 250 kW |
| operating power for approx. 200000 operating cycles at AC-4 | |
| ● at 400 V rated value | 85 kW |
| ● at 690 V rated value | 133 kW |
| operating apparent power at AC-6a | |
| ● up to 230 V for current peak value n=20 rated value | 150 000 kVA |
| ● up to 400 V for current peak value n=20 rated value | 270 000 VA |
| ● up to 500 V for current peak value n=20 rated value | 340 000 VA |
| ● up to 690 V for current peak value n=20 rated value | 470 000 VA |
| ● up to 1000 V for current peak value n=20 rated value | 310 000 VA |
| operating apparent power at AC-6a | |
| ● up to 230 V for current peak value n=30 rated value | 100 000 VA |
| ● up to 400 V for current peak value n=30 rated value | 180 000 VA |
| ● up to 500 V for current peak value n=30 rated value | 220 000 VA |
| ● up to 690 V for current peak value n=30 rated value | 310 000 VA |
| ● up to 1000 V for current peak value n=30 rated value | 310 000 VA |
| short-time withstand current in cold operating state up to 40 °C | |

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum | 6 600 A; Use minimum cross-section acc. to AC-1 rated value 5 761 A; Use minimum cross-section acc. to AC-1 rated value 4 143 A; Use minimum cross-section acc. to AC-1 rated value 2 635 A; Use minimum cross-section acc. to AC-1 rated value 2 088 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | |
| <ul style="list-style-type: none"> • at AC • at DC | 1 000 1/h 1 000 1/h |
| operating frequency | |
| <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-3e maximum • at AC-4 maximum | 700 1/h 200 1/h 500 1/h 500 1/h 130 1/h |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value | 96 ... 127 V 96 ... 127 V |
| control supply voltage at DC | |
| <ul style="list-style-type: none"> • rated value | 96 ... 127 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| <ul style="list-style-type: none"> • initial value • full-scale value | 0.8 1.1 |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.8 ... 1.1 0.8 ... 1.1 |
| type of PLC-control input according to IEC 60947-1 | Type 2 |
| consumed current at PLC-control input according to IEC 60947-1 maximum | 20 mA |
| voltage at PLC-control input rated value | 24 V |
| operating range factor of the voltage at PLC-control input | 0.8 ... 1.1 |
| design of the surge suppressor | with varistor |
| apparent pick-up power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 750 VA 750 VA |
| inductive power factor with closing power of the coil | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.8 0.8 |
| apparent holding power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 9 VA 9 VA |
| inductive power factor with the holding power of the coil | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.4 0.4 |
| closing power of magnet coil at DC | 800 W |
| holding power of magnet coil at DC | 3.6 W |
| closing delay | |
| <ul style="list-style-type: none"> • at AC • at DC | 60 ... 90 ms 60 ... 90 ms |
| opening delay | |
| <ul style="list-style-type: none"> • at AC • at DC | 80 ... 100 ms 80 ... 100 ms |
| arcing time | 10 ... 15 ms |
| control version of the switch operating mechanism | PLC-IN or Standard A1 - A2 (adjustable) |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts instantaneous contact | 2 |
| number of NO contacts for auxiliary contacts instantaneous contact | 2 |

| | |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| • at 230 V rated value | 6 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| • at 690 V rated value | 1 A |
| operational current at DC-12 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 6 A |
| • at 60 V rated value | 6 A |
| • at 110 V rated value | 3 A |
| • at 125 V rated value | 2 A |
| • at 220 V rated value | 1 A |
| • at 600 V rated value | 0.15 A |
| operational current at DC-13 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 2 A |
| • at 60 V rated value | 2 A |
| • at 110 V rated value | 1 A |
| • at 125 V rated value | 0.9 A |
| • at 220 V rated value | 0.3 A |
| • at 600 V rated value | 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| • at 480 V rated value | 361 A |
| • at 600 V rated value | 382 A |
| yielded mechanical performance [hp] | |
| • for 3-phase AC motor | |
| — at 200/208 V rated value | 125 hp |
| — at 220/230 V rated value | 150 hp |
| — at 460/480 V rated value | 300 hp |
| — at 575/600 V rated value | 400 hp |
| contact rating of auxiliary contacts according to UL | A600 / Q600 |
| Short-circuit protection | |
| design of the fuse link | |
| • for short-circuit protection of the main circuit | |
| — with type of coordination 1 required | gG: 630 A (690 V, 100 kA) |
| — with type of assignment 2 required | gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) |
| • for short-circuit protection of the auxiliary switch required | gG: 10 A (500 V, 1 kA) |
| Installation/ mounting/ dimensions | |
| mounting position | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method | screw fixing |
| • side-by-side mounting | Yes |
| height | 214 mm |
| width | 160 mm |
| depth | 225 mm |
| required spacing | |
| • with side-by-side mounting | |
| — forwards | 20 mm |
| — upwards | 10 mm |
| — downwards | 10 mm |
| — at the side | 0 mm |
| • for grounded parts | |
| — forwards | 20 mm |
| — upwards | 10 mm |
| — at the side | 10 mm |
| — downwards | 10 mm |
| • for live parts | |

| | |
|---------------|-------|
| — forwards | 20 mm |
| — upwards | 10 mm |
| — downwards | 10 mm |
| — at the side | 10 mm |

Connections/ Terminals

| | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil | Connection bar spring-loaded terminals Spring-type terminals Spring-type terminals |
| width of connection bar | 25 mm |
| thickness of connection bar | 6 mm |
| diameter of holes | 11 mm |
| number of holes | 1 |
| connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> • stranded | 70 ... 240 mm ² |
| connectable conductor cross-section for auxiliary contacts | |
| <ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing • finely stranded without core end processing | 0.25 ... 2.5 mm ² 0.25 ... 1.5 mm ² 0.25 ... 2.5 mm ² |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for auxiliary contacts | 2x (0.25 ... 2.5 mm ²) 2x (0,25 ... 2,5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 2.5 mm ²) 2x (24 ... 14) |
| AWG number as coded connectable conductor cross section | |
| <ul style="list-style-type: none"> • for auxiliary contacts | 24 ... 14 |

Safety related data

| | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| product function | |
| <ul style="list-style-type: none"> • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 | Yes No |
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| T1 value for proof test interval or service life according to IEC 61508 | 20 a |
| protection class IP on the front according to IEC 60529 | IP00; IP20 with box terminal/cover |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front with box terminal/cover |
| suitability for use | |
| <ul style="list-style-type: none"> • safety-related switching OFF | Yes |

Certificates/ approvals

| | |
|--------------------------|-----|
| General Product Approval | EMC |
|--------------------------|-----|



[Confirmation](#)



| | | | |
|---------------------------------------|---------------------------|-------------------|-------------------|
| Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------------------|---------------------------|-------------------|-------------------|

[Type Examination Certificate](#)



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)




| | |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|




| | |
|-------|---------|
| other | Railway |
|-------|---------|

Special Test Certificate

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1075-2NF36&objecttype=14&gridview=view1>

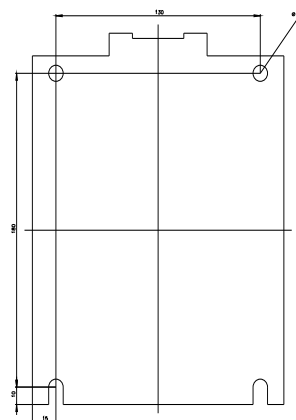

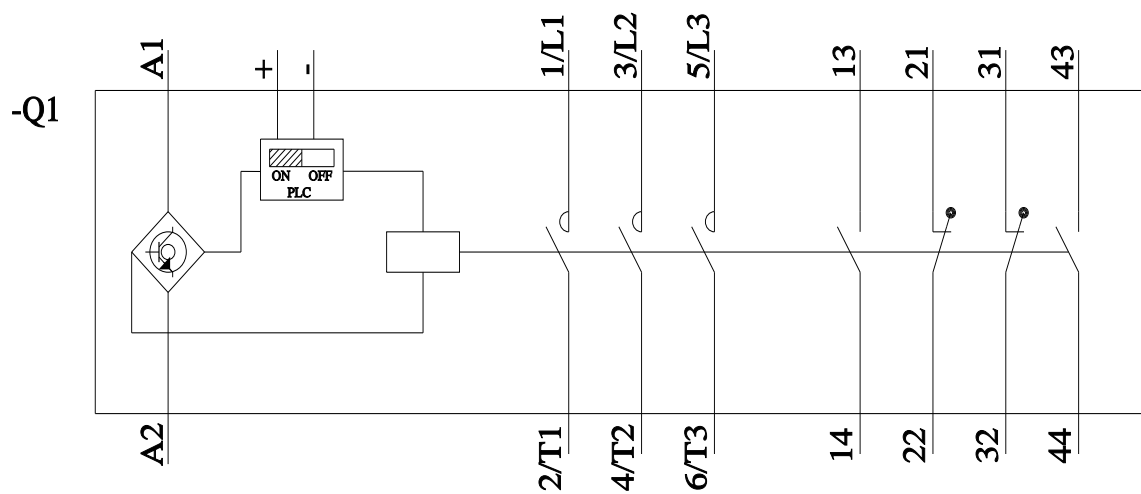

last modified:

2/10/2023 