

CLCC2V3216

Common mode inductor / auto transformer



Product features

- Use as auto transformer
- Capacitive chip LAN
- 1206 (3216 metric) compact package
- Weight 0.044 grams typical
- Moisture sensitivity level (MSL): 1
- Use with CLCC1V2012 common-mode inductor for capacitive chip LAN applications

Applications

- 1 G, 2.5 G BASE-T applications
- RJ45 network interface card
- Ethernet switch, router, ADSL
- VDSL digital equipment
- Network set-top box
- Smart TV
- Network camera
- PC motherboard
- Industrial motherboard

Environmental compliance and general specifications

- Operating temperature range: -40 °C to +85 °C (ambient plus self-temperature rise)
- Storage temperature range: -40 °C to +85 °C (component)



Product specifications


Part number	Inductance ¹ (μH) minimum	Capacitance ² (pF) maximum	DCR ³ (Ω) @ +25 °C maximum	Rated current ⁴ (mA) maximum	Rated voltage ⁴ (Vdc) maximum	Withstand voltage ⁵ (Vdc) maximum	Insulation resistance ⁵ (MΩ minimum)
CLCC2V3216-600-R	60	25	1.7	200	50	125	10

1. Inductance: pins (1-2), (4-3), test frequency parameters: 100 kHz, 0.1 V @ +25 °C
2. Capacitance: pins (1,2) to (4,3), test frequency parameters: 100 kHz, 0.1 V @ +25 °C
3. DCR: pins (1-2), (4-3), @ +25 °C


4. Rated current and rated voltage: pins (1-4) short (2-3), based on a temperature rise of approximately 15 °C
5. Withstand voltage: (1 mA, 1 s), Insulation resistance: (50 V, 1 s): pins (1,2) - (4,3)

Mechanical parameters, schematic, pad layout (mm)


Top view




Front view




Bottom view

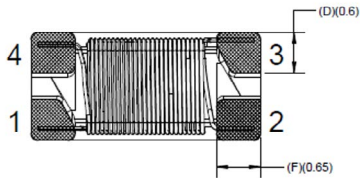


Schematic
Common-mode

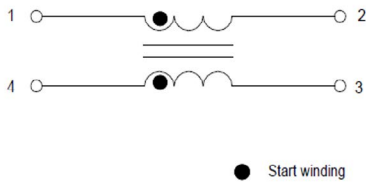


Schematic
Auto transformer



Right view




Recommended pad layout

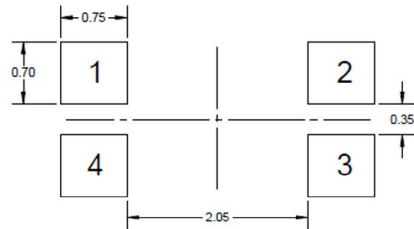


Part marking: No marking
All soldering surfaces to be coplanar within 0.1 millimeters
Silkscreen thickness: 0.1 - 0.15 mm
Traces or vias underneath the inductor is not recommended

Packaging information (mm)

Supplied in tape and reel packaging, 7,000 parts per 13" diameter reel (EIA-481 compliant)

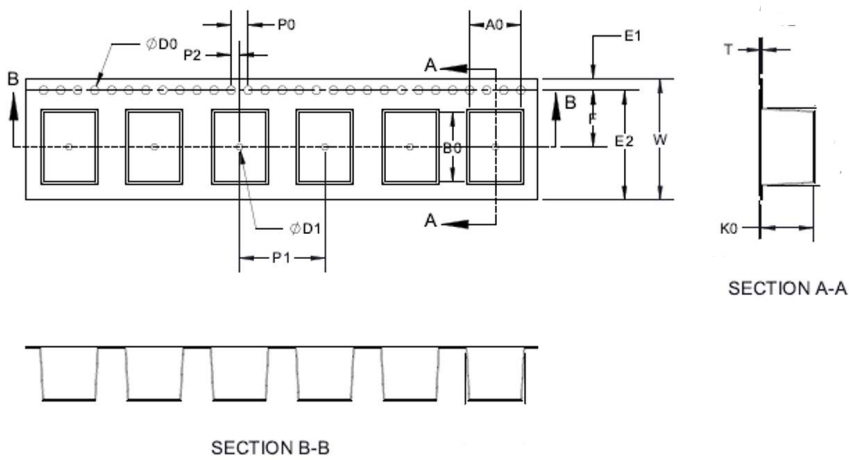


Dimension	CLCC2V3216
A0	1.85 ± 0.1
B0	3.65 ± 0.1
K0	2.30 ± 0.1
T	0.26 ± 0.05
W	8 ± 0.1
F	3.50 ± 0.1
E1	1.75 ± 0.1
E2	5.25 minimum
P0	4 ± 0.1
P1	4 ± 0.1
P2	2 ± 0.05
D0	$1.50 + 0.1/-0$
D1	$0.65 + 0.1/-0$

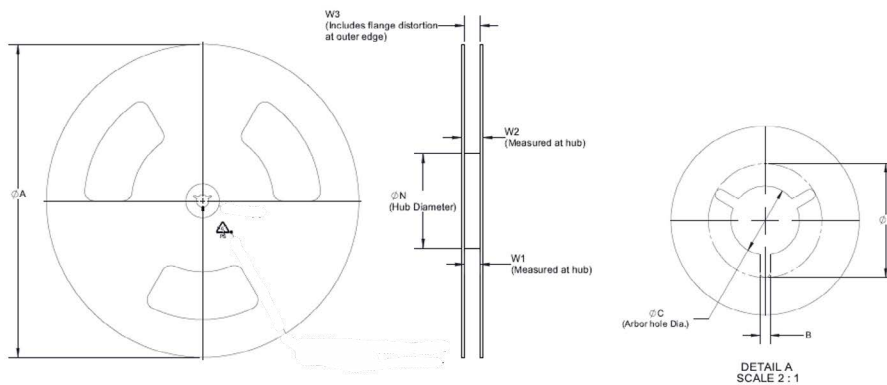


Dimension	CLCC2V3216
Type	13" * 8
A	330 ± 2
B	3.20 ± 0.3
C	$13 + 0.5/-0.2$
D	20.20 minimum
N	100 ± 2
W1	$8.4 + 1.5/-0$
W2	12.60 ± 0.3
W3	N/A


Impedance vs frequency

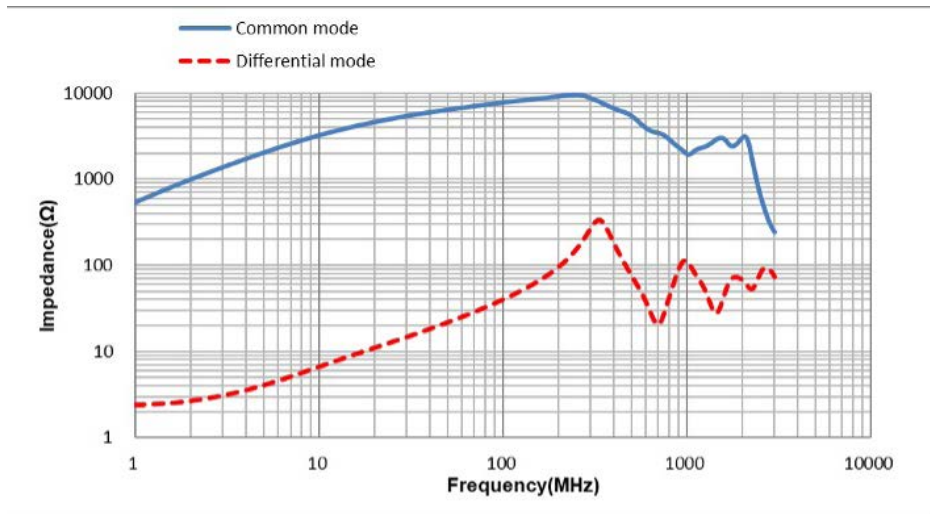

Inductance vs DC bias

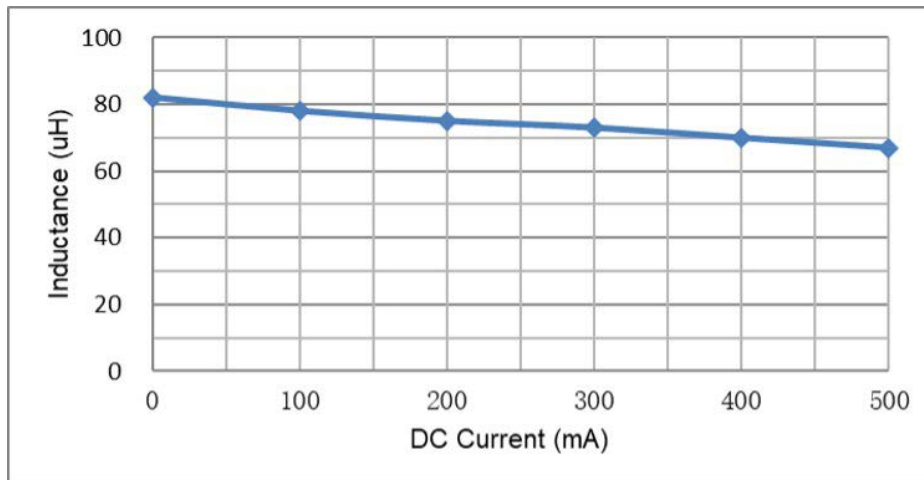


Current vs temperature rise

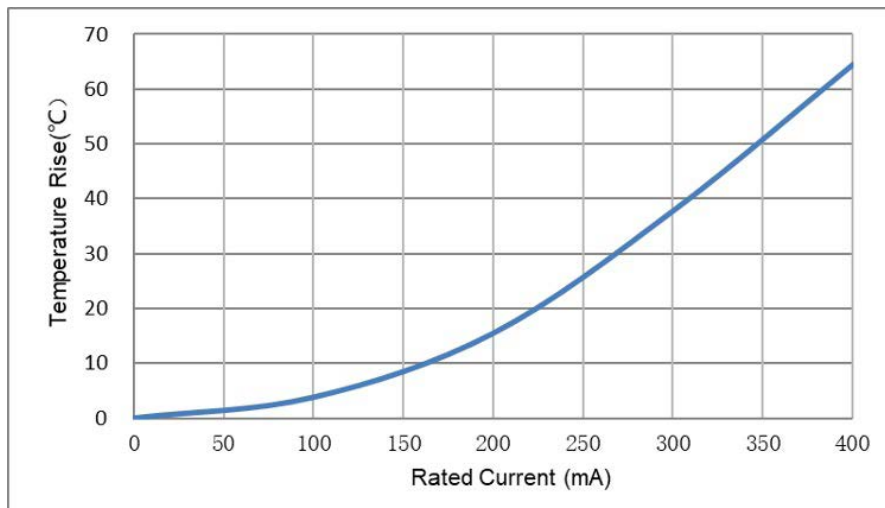

Application example

Voltage driving capacitive chip LAN circuit using Eaton CLCC1V2012 common-mode inductor and CLCC2V3216 auto transformer

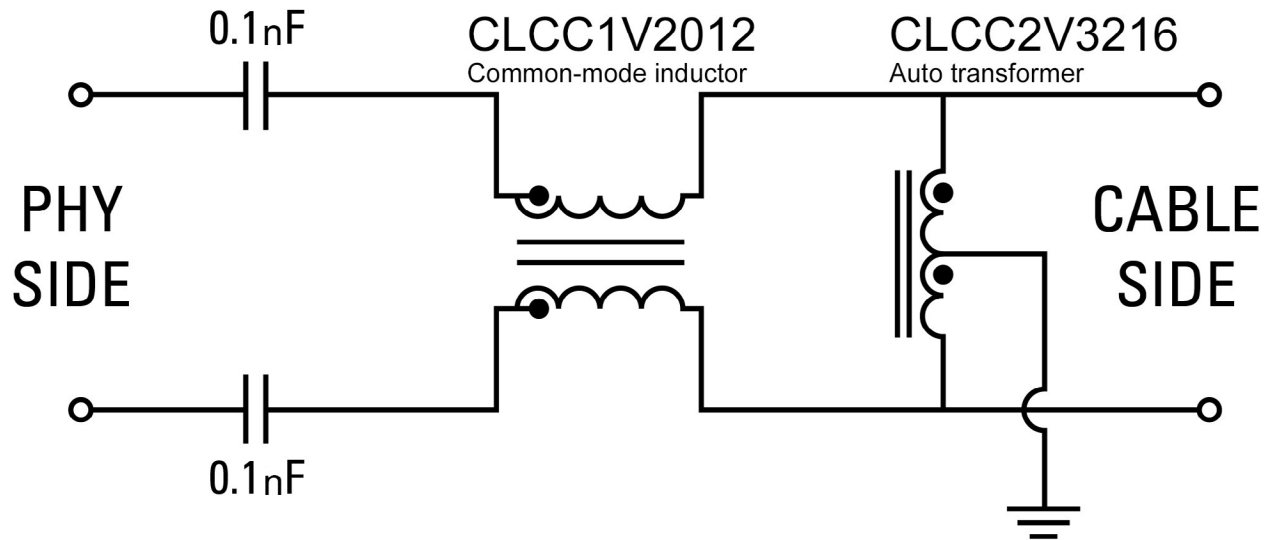

Solder reflow profile

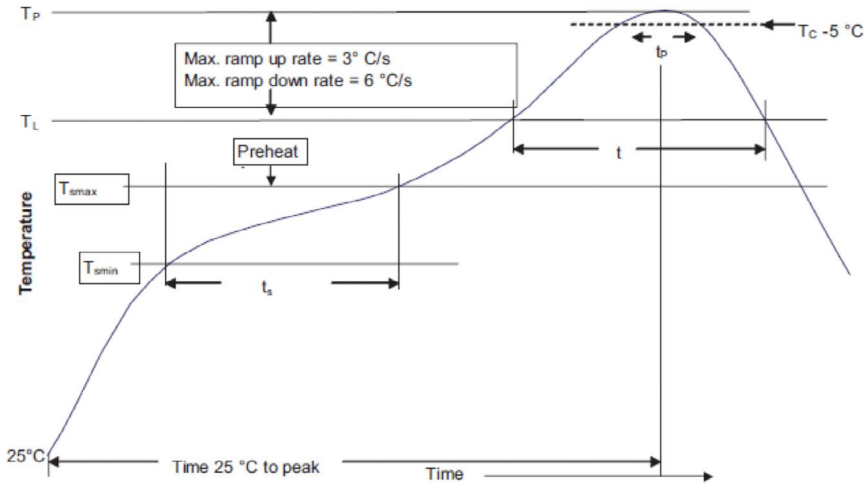


Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm)	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60-120 seconds
Ramp up rate T_L to T_P	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-150 seconds
Peak package body temperature (T_P)*	Table 1	Table 2
Time (t_P)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	30 seconds*
Ramp-down rate (T_P to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_P) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2023 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1365 BU-ELX22233
July 2023

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

