
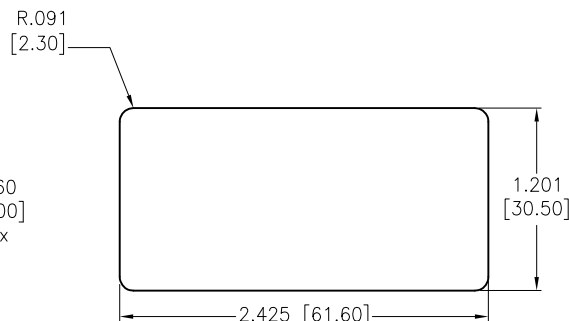






APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/29/23	

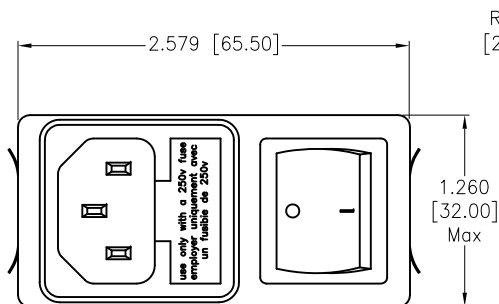

RECOMMENDED PANEL CUT

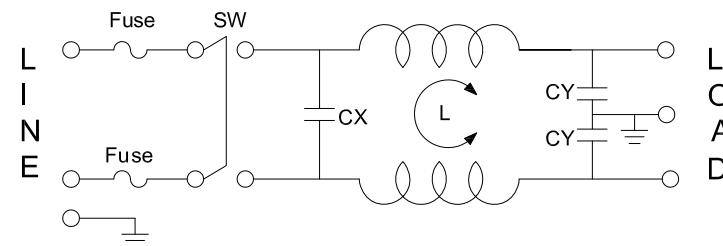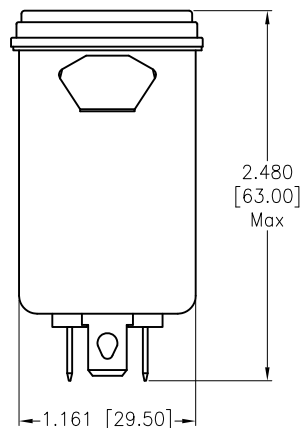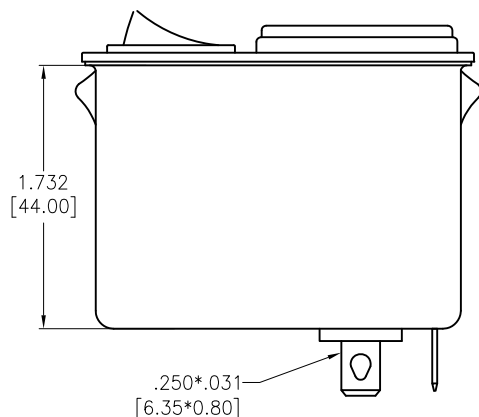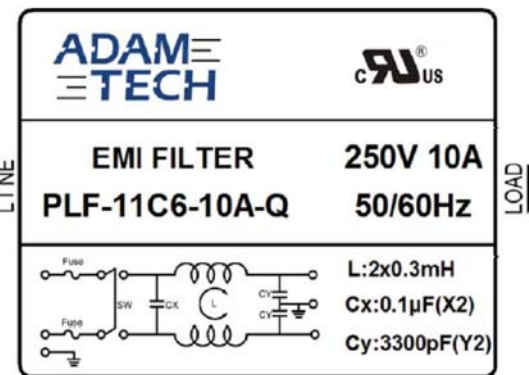

L: 2x0.3mH
Cx: 0.1uF(X2)
Cy: 3300pF(Y2)

SPECIFICATIONS:

Electrical:

Voltage rating: 115/250 VAC

Current rating: 115/250 VAC: 10A RMS max

Operating Frequency: 50/60Hz

Leakage Current: Each Line To Ground

①115VAC/60Hz 0.4mA max

②250VAC/50Hz 0.8mA max

Hipot Rating(For 1 Minute)

A. Line to Ground: 2,250 VDC

B. Line to Line: 1450 VDC

IR: 50 Mohm @500 VDC Any Input or Output to Ground

Temperature Rating:

-25°C to +100°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED			ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES .X ± .10 .XX ± .020 .XXX ± .015					HOLES Ø.X ± .10 Ø.XX ± .015 Ø.XXX ± .010	
DRAWN	WX	5/29/23	TITLE FILTERED POWER ENTRY MODULE, DUAL FUSE, W/ SWITCH, 115/250V AC, 10A, SNAP IN MODULE			
CHECKED	RC	5/29/23				
APPROVED						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			SIZE X	PART NO. PLF-11C6-10A-Q		REV -
			REF: S00205C		SCALE: NTS	SHEET 1 OF 2

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description


Date

Appr

SEE SHT 1 OF 2 FOR REVISION

INSERTION LOSS(IN 50 ohm system according IEC/CISPR No.17)

_____ common mode
_____ differential mode

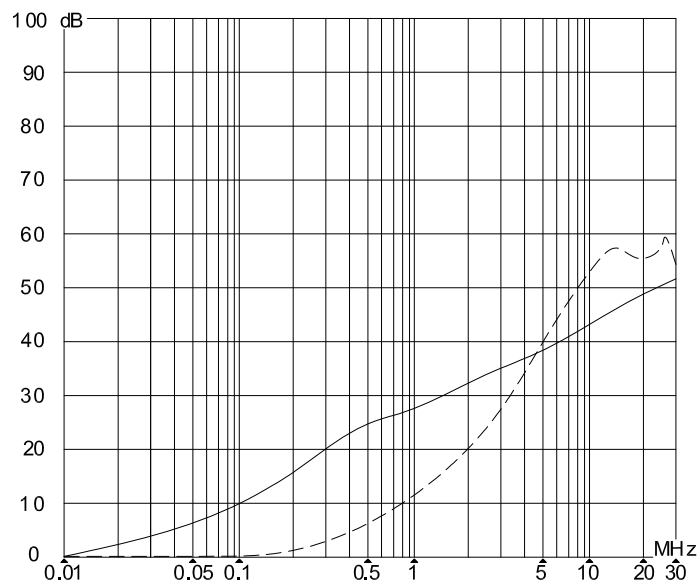

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN

WX

5/29/23

CHECKED

RC

5/29/23

APPROVED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

FILTERED POWER ENTRY MODULE, DUAL FUSE,
W/ SWITCH, 115/250V AC, 10A, SNAP IN MODULE

SIZE
X

PART NO.

PLF-11C6-10A-Q

REV.
-

REF:

S00205C

SCALE: NTS

SHEET 2 OF 2

6

5

4

3

2

1