



Part Number:	<b>IE092705-1</b>	
	DRAWN	6/20/2016
	CHECKED	3/24/2017
Description:	P.D.	
	<b>Electro-Mechanical Indicator</b>	
	APPROVED	3/24/2017
	C.E.	
<small>This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at <a href="http://www.dbunlimitedco.com">www.dbunlimitedco.com</a></small>		


Top View



Side View



Bottom View

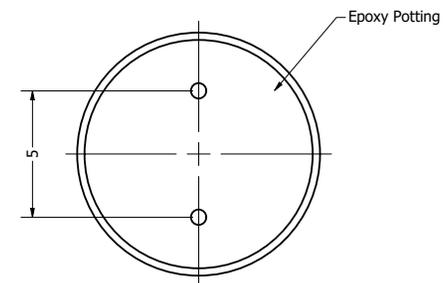

Items	Specifications	Conditions	REVISION HISTORY			
Sound Pressure Level	80	dB (@ 10cm)				
Tone	Single					
Resonant Frequency	2,730 ± 300	Hz				
Rated Voltage	5	V	REV	DESCRIPTION	DATE	APPROVED
Voltage Range	3 - 7	V		Released from Engineering	10/21/2013	J.S.
Max. Rated Current	25	mA	1	Update template, specs, add missing washtab	3/23/2017	C.E.
Storage Temperature	-30 ~ +85	°C	2	Updated storage temperature	4/17/2019	C.E.
Operating Temperature	-30 ~ +85	°C				
Connection Method	PC Pins					
Mount Type	Thru Hole					
Housing Material	PBT					
Weight	1	g				
			NOTES			
			1) All dimensions are in mm unless otherwise noted			
			2) All tolerances are ± 0.5 mm unless otherwise noted			
			3) All parts meet RoHS			
			4) Subject to change or redrawn without notice			