

Style

M12 Plug
8 pin
A-coding

Ratings

Voltage: 30 V
Current: 2 A

Operating Temperature Range

-40 ~ 105 °C

Materials

- ① Insulator: Polyamide 66 (PA66), UL94 HB, black
- ② Pin: C3604 brass, gold plated
- ③ Shell: C3604 brass, nickel plated

Electrical Requirements

Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less

Mechanical Requirements



Life cycle: 500 mating cycles minimum

Environmental Requirements





Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 48 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.
Waterproof: IP67

Assembly Info

Wire gauge: 24 AWG max

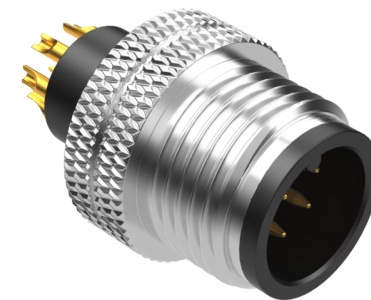

Front View
Not to Scale

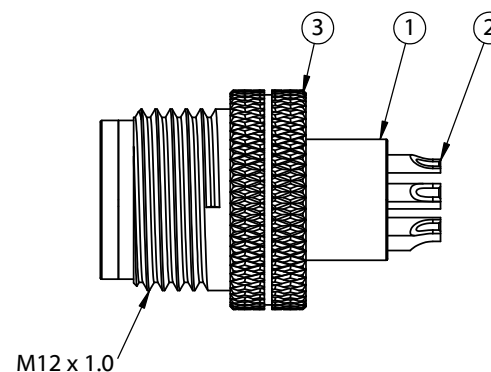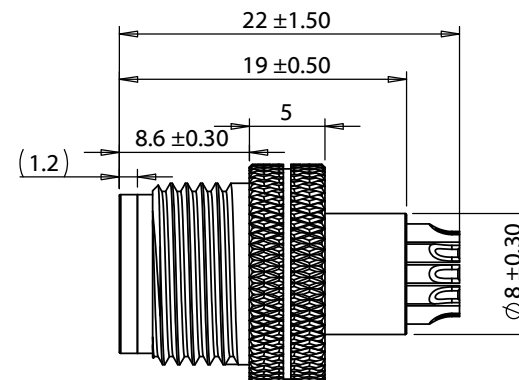

Revision:	Date:	Description:	Prepared:	Notes:	<div style="text-align: center;"> <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118</p> <p>fax 1.541.323.4202 web tensility.com</p> </div>		
A	8/4/2020	Initial release	Verified:	RoHS compliant			
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	Size:	Part number:	
			Tolerances:	Description:	A	50-00962	
			X: ± 0.3 mm	Connector, M12 A-code plug, 8 pin, 12xL22 mm, molding style, solder cup, gold plated, IP67	Scale: 2:1		Sheet 1 of 1
			X.X: ± 0.1 mm				
			X.XX: ± 0.05 mm				