

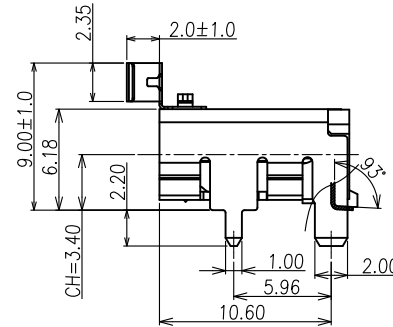
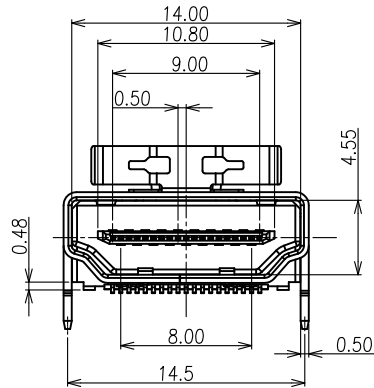
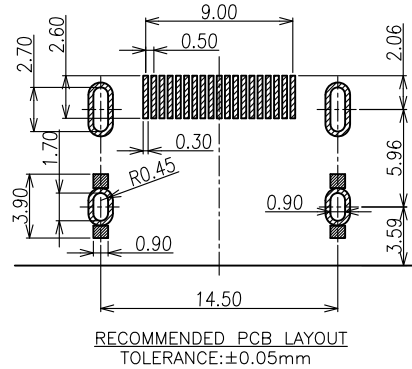


符合"DLK环境管理物质技术标准",符合HDMI协会规范要求

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN22017	A	20220512	NEW RELEASE	—	—

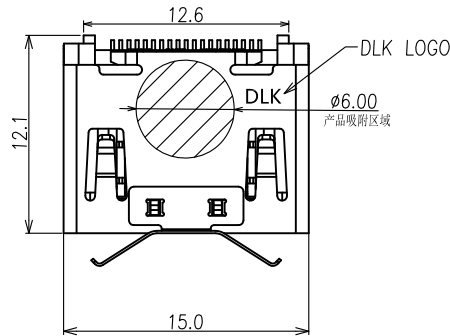

NOTE:

1. MATERIAL.

1.1 Housing: LCP UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Stainless steel

1.4 Shrapnel:Stainless steel

2. PLATING:

2.1 Contact: 15u"Au plated on contact Area,
50u" Min. Matte Tin plated on solder tail,

50u" Min.Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Mating force:4.5kgf Max.

3.2 Unmating force:1.0~4.0kgf.

3.3 Durability:10000 cycles Min.

4 ELECTRICAL:

4.1 Current Rating:0.5A

4.2 Voltage Rating:40V


4.3 Dielectric strength:500V AC FOR 1 minute

4.4 Insulation Resistance:100MΩ Min.

4.5 Contact Resistance:10mΩ Max

5. Operating Temperature:-55°C to +105°C

6. PACKING: Tape & Reel



COPLARNITY

4	SHRAPNEL	1	STAINLESS STEEL	—
3	CONTACT	19	COPPER ALLOY	PLATED Au
2	SHELL	1	STAINLESS STEEL	PLATED NI
1	HOUSING	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	⌀



德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	HDMI 2.1 A/F R/A 6.18H DIP2.0 19PIN SMT CONN.
	档案名称 FILE NAME.	C-HDM65-00-00
	料号 PART NO.	56519B04101
DRAWING	覃智森	CHECKED
	UNIT:	mm
	SCALE	1:1
	SHEET:	1 of 1

A
B
C
D
E
F
G
H
I
J