

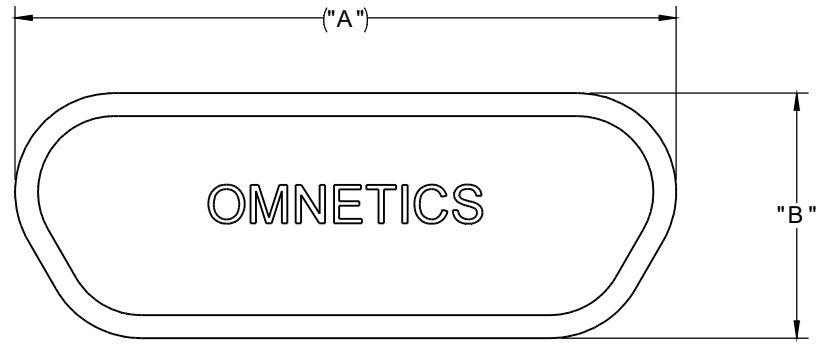
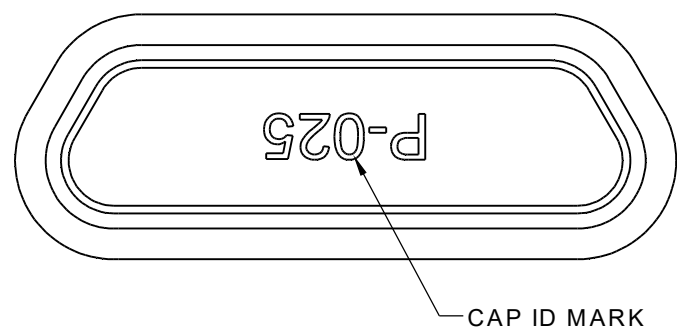


PART NO.	D 6258-XXX	REV	ECO	DATE	APP
		C	109568	12-12-22	BAS



ACTUAL SIZE
(D6258-025 SHOWN)

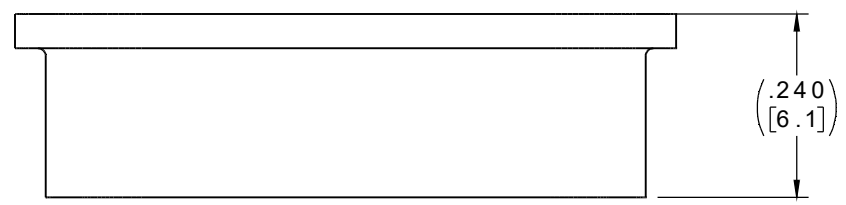


PART NO.	"ID"	"A " (IN)	"A " [m m]	"B " (IN)	"B " [m m]
D 6258-009	P-009	.46	11.7	.32	8.1
D 6258-015	P-015	.61	15.5	.32	
D 6258-021	P-021	.76	19.3	.32	
D 6258-025	P-025	.86	21.8	.32	
D 6258-031	P-031	1.01	25.7	.32	
D 6258-037	P-037	1.16	29.5	.32	
D 6258-512	P-512	1.51	38.4	.32	9.4
D 6258-513	P-513	1.11	28.2	.37	
D 6258-069	P-069	1.41	35.9	.37	

NOTES:

1. COLOR: BLACK
2. MATERIAL: CONDUCTIVE POLYETHYLENE THAT MEETS THE ANTI-STATIC DECAY RATE REQUIREMENT OF MIL-PRF-81705D
3. ALL REQUIREMENTS FOR MANUFACTURING ARE CONTAINED ON SHEET 2 ONLY
4. DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY


DWG	THIRD ANGLE	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.	OMNETICS CONNECTOR CORPORATION 8840 EVERGREEN BLVD. MINNEAPOLIS, MN 55433 WWW.OMNETICS.COM	DWG NO. CAGE CODE 61873	
	-TOLERANCES-			D6258-XXX	
	UNLESS OTHERWISE NOTED				
	DIMENSIONS IN INCHES				
	TITLE:			SHEET 1 OF 2	SCALE: 4:1
2 PL DEC ± .01	DFTM. NJS	DUST CAP,			
3 PL DEC ± .005	DATE	MICRO-D MALE			
4 PL DEC ± .001	02-16-11	BLACK, CONDUCTIVE			
ANGLES ± 1°					

PART NO.	D6258-XXX	REV	ECO	DATE	APP
		C	109568	12-12-22	BAS

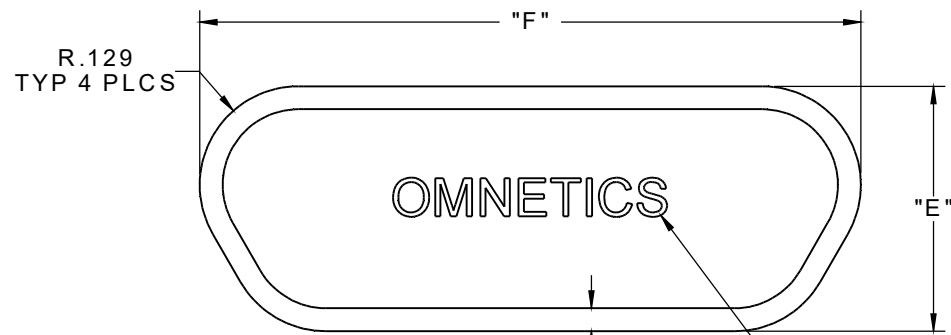


ACTUAL SIZE
(D6258-025 SHOWN)

"OMNETICS"
.050 FONT HEIGHT, ARIAL FONT RAISED .005
LOCATED APPROXIMATELY AS SHOWN

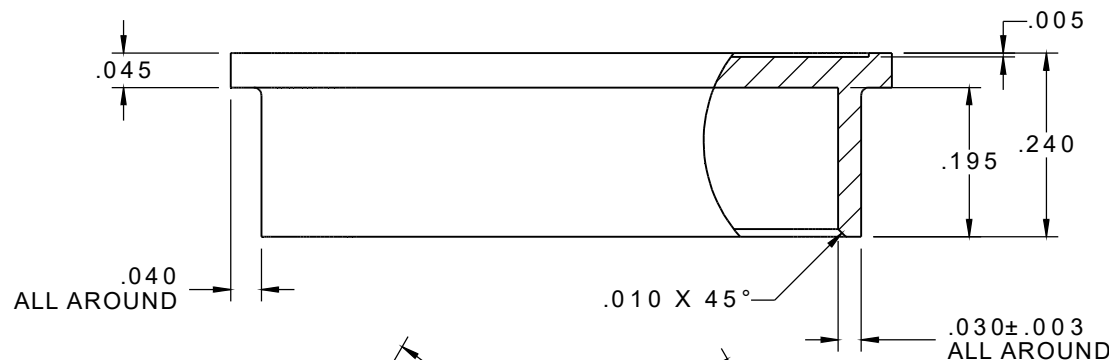

PART NO.	"ID"	"C"	"D"	"E"	"F"
D6258-009	P-009	.180	.324	.320	.464
D6258-015	P-015	.180	.474	.320	.614
D6258-021	P-021	.180	.624	.320	.764
D6258-025	P-025	.180	.724	.320	.864
D6258-031	P-031	.180	.874	.320	1.014
D6258-037	P-037	.180	1.024	.320	1.164
D6258-512	P-512	.180	1.374	.320	1.514
D6258-513	P-513	.225	.974	.365	1.114
D6258-069	P-069	.225	1.274	.365	1.414

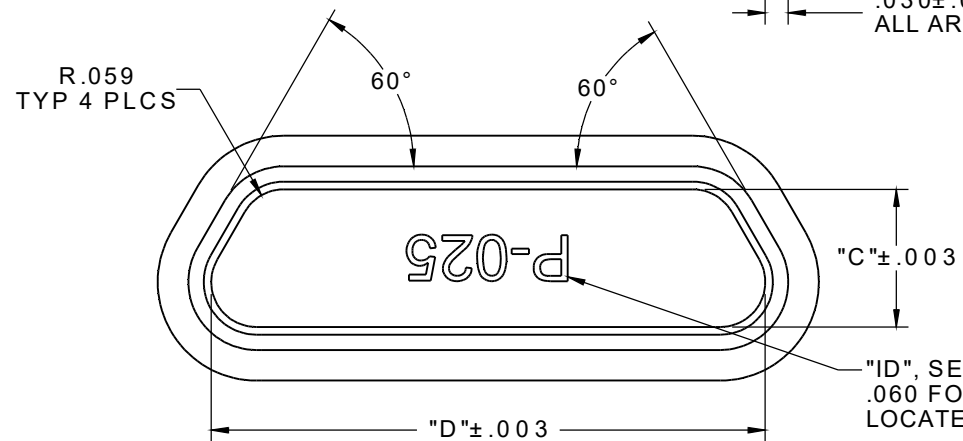

"ID", SEE TABLE,
.060 FONT HEIGHT, ARIAL FONT RAISED .005
LOCATED APPROXIMATELY AS SHOWN

S/DW	THIRD ANGLE	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.	OMNETICS CONNECTOR CORPORATION 8840 EVERGREEN BLVD. MINNEAPOLIS, MN 55433 WWW.OMNETICS.COM	DWG NO.	CAGE CODE 61873	
	-TOLERANCES- UNLESS OTHERWISE NOTED DIMENSIONS IN INCHES			D6258-XXX		
	2 PL DEC±.01 3 PL DEC±.005 4 PL DEC±.001 ANGLES ± 1°			SHEET 2 OF 2		
	TITLE: DUST CAP, MICRO-D MALE BLACK, CONDUCTIVE			SCALE: 4:1	REV C	