



Pushing Performance  
Since 1945

# D-SUB "US" 9F-EW 6.08

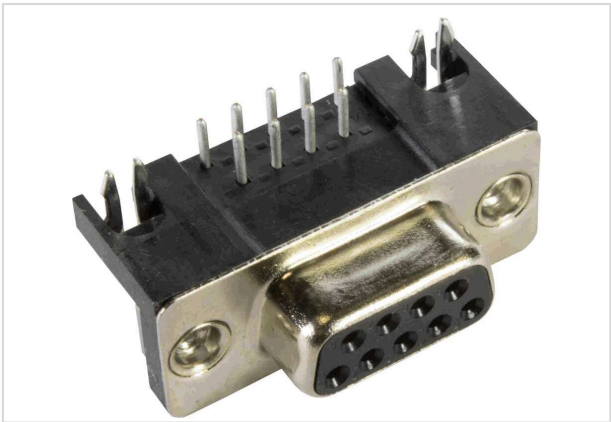


Image is for illustration purposes only. Please refer to product description.

Part number	09 68 153 5612
Specification	D-SUB "US" 9F-EW 6.08
HARTING eCatalogue	<a href="https://harting.com/09681535612">https://harting.com/09681535612</a>

## Identification

Category	Connectors
Series	D-Sub
Identification	Standard
Element	Connector
Specification	U.S. Footprint
Description of the contact	Stamped Angled

## Version

Termination method	Wave soldering termination
Gender	Female
Size	D-Sub 1
Connection type	Motherboard to daughtercard
Number of contacts	9
further contacts	With grounding pin
Termination length	3.2 mm
PCB fixing	With board locks
Locking type	Fixing flange with thread 4-40 UNC

## Technical characteristics

Distance between rows	2.84 mm
Contact spacing (termination side)	2.77 mm
Rated current	6.5 A



**Pushing Performance**  
Since 1945

## Technical characteristics

Clearance distance	≥1 mm
Creepage distance	≥1 mm
Insulation resistance	>10 <sup>10</sup> Ω
Contact resistance	≤10 mΩ
Tightening torque	≤0.6 Nm Female screw lock
Limiting temperature	-55 ... +125 °C
Insertion force	≤30 N
Withdrawal force	≥3.3 N ≤20 N
Performance level	NM 30 (S4) 1
Mating cycles	≥500
Test voltage U <sub>r.m.s.</sub>	1 kV
Isolation group	IIIa (175 ≤ CTI < 400)
PCB thickness	≥1.6 mm
Installation height	6.3 mm
Hot plugging	No

## Material properties

Material (insert)	Thermoplastic resin, glass-fibre filled (PBTP) Shell: Plated steel
Colour (insert)	Black
Material (contacts)	Copper alloy
Surface (contacts)	Noble metal over Ni
Layer thickness	≥0.76 µm
Layer thickness	≥30 µinch
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead



**Pushing Performance**  
Since 1945

## Material properties

ECHA SCIP number	ecef7555-f643-4ceb-a337-fc54762297f1
California Proposition 65 substances	Yes
California Proposition 65 substances	Antimony trioxide
	Lead
	Nickel
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R26

## Specifications and approvals

Specifications	DIN 41652
UL / CSA	UL 1977 ECBT2.E102079

## Commercial data

Packaging size	50
Net weight	8 g
Country of origin	China
European customs tariff number	85366990
GTIN	5713140095526
eCl@ss	27440214 D-Sub coupler
ETIM	EC001136
UNSPSC 24.0	39121469