
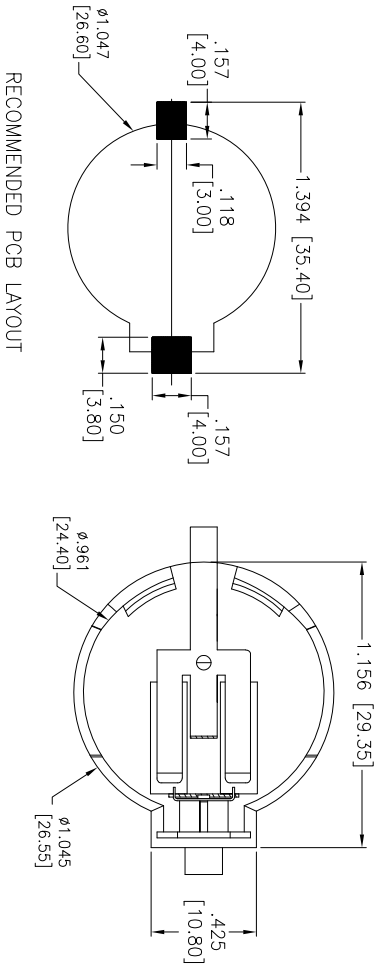


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/9/12	

APPROVED: _____

DATE: _____ TITLE: _____

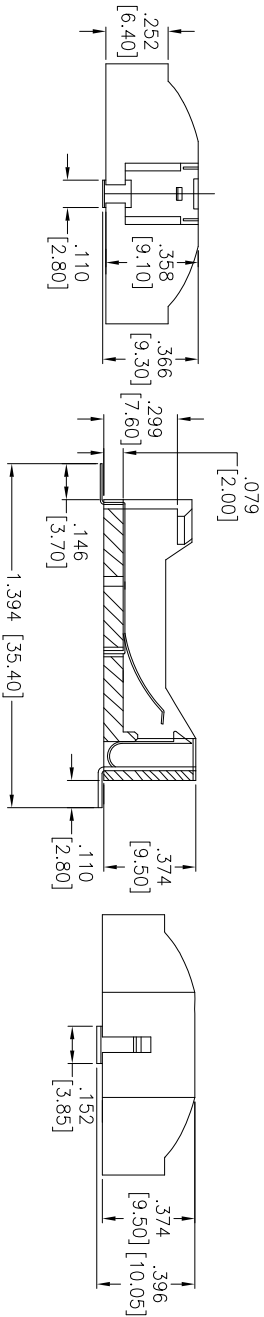

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material: Insulator: PBT, glass fiber rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Electrical: Current rating: 30 Milliamps max
 Insulation Resistance: 1000 Mega ohms min
 Dielectric Withstands Voltage: 750V AC for 1 min.
 Temperature Rating: Operating temperature: -55°C to +85°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

2PIN BATTERY HOLDERS, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X INCHES		± .10 Ø.X HOLES		± .10 Ø.XX ± .015 Ø.XXX ± .010		TITLE	
APPROVALS				DATE			
DRAWN	AY		2/9/12		SIZE PART NO.		
CHECKED	AH		2/9/12		BH-55-5		
APPROVED					REV. -		
REF: S00074C				SCALE: NTS			
				SHEET 1 OF 1			