




Opto Plus LED Corp.
0.20" SMD Type LED Display
OPS-T2010SYG | OPS-T2011SYG

● **EDIT HISTORY**

Version A: Nov. 11, 2020

Preliminary Spec.



www.opledtw.com

Opto Plus LED Corp.

0.20" SMD Type LED Display

OPS-T2010SYG | OPS-T2011SYG

● FEATURES

- 0.20 inch (5.08 mm) Digit Height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

● DESCRIPTION

The device are 0.20 inch (5.08 mm) height triple digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Yellow Green LED chip which are made from AlGaInP on a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE

PART NO.	DESCRIPTION
OPS-T2010SYG-GW	Common Anode Gray face White segment
OPS-T2011SYG-GW	Common Cathode Gray face White segment
OPS-T2010SYG-BW	Common Anode Black face White segment
OPS-T2011SYG-BW	Common Cathode Black face White segment


RoHS Compliance



Pb Free.









www.opledtw.com

Opto Plus LED Corp. 0.20" SMD Type LED Display OPS-T2010SYG | OPS-T2011SYG

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

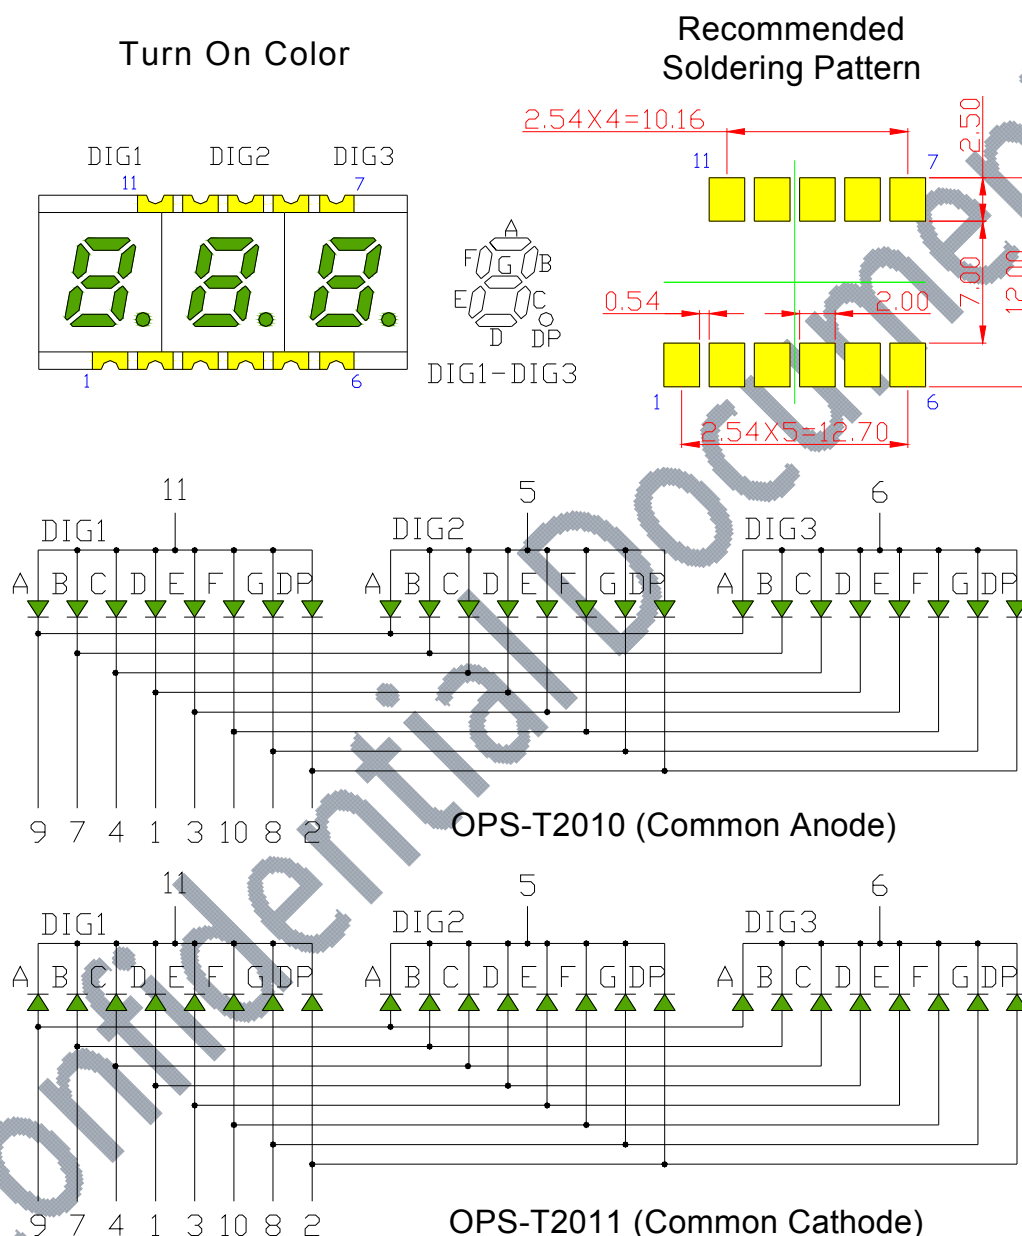

※EMITTED COLOR : SUPER BRIGHT YELLOW GREEN



www.opledtw.com

Opto Plus LED Corp. 0.20" SMD Type LED Display OPS-T2010SYG | OPS-T2011SYG

● PRODUCT APPEARANCE


The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-T2010SYG-GW	Common Anode Gray face White segment
OPS-T2011SYG-GW	Common Cathode Gray face White segment
OPS-T2010SYG-BW	Common Anode Black face White segment
OPS-T2011SYG-BW	Common Cathode Black face White segment



www.opledtw.com

Opto Plus LED Corp.
0.20" SMD Type LED Display
OPS-T2010SYG | OPS-T2011SYG


● **SYG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	48	mW
Continuous forward current	I _{AF}	20	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	40	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V _F	I _F =20mA	-	2.1	2.4	V
Reverse Current, (Per Dice)	I _R	V _R =5V	-	-	10	μA
Peak Wavelength	λ _P	I _F =20mA	-	573	-	nm
Dominant Wavelength	λ _D	I _F =20mA	567	-	576	nm
Luminous Intensity	I _V	I _F =20mA	2	8	15	mcd
Spectral Line Half-Bandwidth	Δλ	I _F =20mA	-	20	-	nm



www.opledtw.com

Opto Plus LED Corp.
0.20" SMD Type LED Display
OPS-T2010SYG | OPS-T2011SYG

● SYG: BIN GRADE (Unit :mcd) 20mA

Super Bright Yellow Green	F	G	H
	2.0 - 6.0	6.1 - 10.0	10.1 - 15.0

● SYG: HUE GRADE (λ D : nm)

1	2	3
567.0 - 570.0	570.1 - 573.0	573.1 - 576.0

● AVAILABLE BIN / HUE TABLE

F1	F2	F3
G1	G2	G3
H1	H2	H3

● SYG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

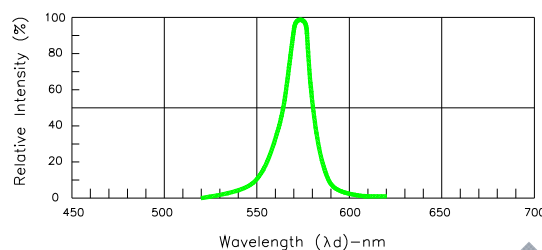


Fig.1-Relative Intensity VS. Wavelength

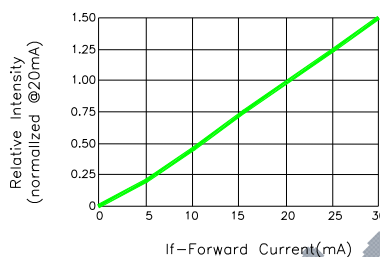


Fig.2-Relative Luminous Intensity vs. Forward Current

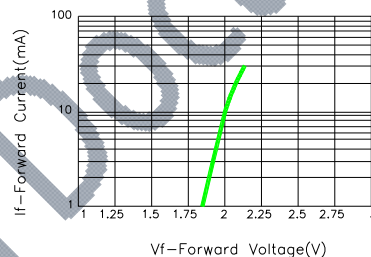


Fig.3-Forward Current vs. Forward Voltage

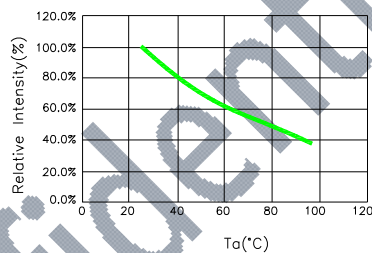


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

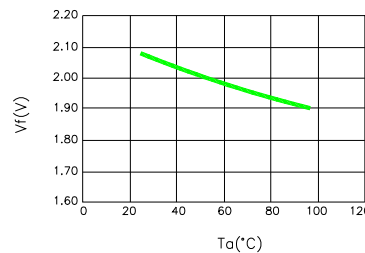


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

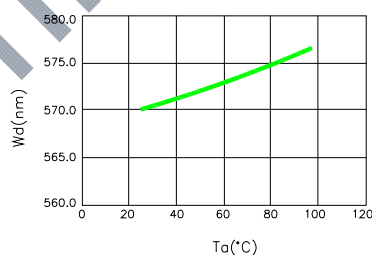


Fig.6-Dominant Wavelength(@20mA)
VS. Ambient Temperature


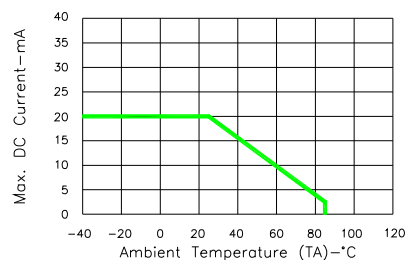


Fig.7-Max. Allowable DC Current
VS. Ambient Temperature



www.opledtw.com

Opto Plus LED Corp.
0.20" SMD Type LED Display
OPS-T2010SYG | OPS-T2011SYG


● **SYG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	48	mW
Continuous forward current	I _{AF}	20	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	40	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V _F	I _F =20mA	-	2.1	2.4	V
Reverse Current, (Per Dice)	I _R	V _R =5V	-	-	10	μA
Peak Wavelength	λ _P	I _F =20mA	-	573	-	nm
Dominant Wavelength	λ _D	I _F =20mA	567	-	576	nm
Luminous Intensity	I _V	I _F =20mA	2	8	15	mcd
Spectral Line Half-Bandwidth	Δλ	I _F =20mA	-	20	-	nm



www.opledtw.com

Opto Plus LED Corp.
0.20" SMD Type LED Display
OPS-T2010SYG | OPS-T2011SYG

● SYG: BIN GRADE (Unit :mcd) 20mA

Super Bright Yellow Green	F	G	H
	2.0 - 6.0	6.1 - 10.0	10.1 - 15.0

● SYG: HUE GRADE (λ D : nm)

1	2	3
567.0 - 570.0	570.1 - 573.0	573.1 - 576.0

● AVAILABLE BIN / HUE TABLE

F1	F2	F3
G1	G2	G3
H1	H2	H3

● SYG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

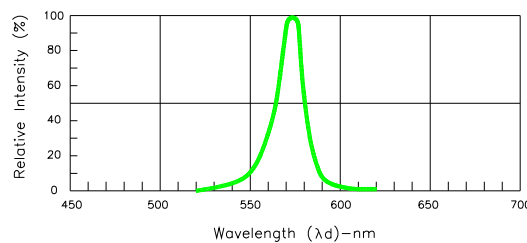


Fig.1-Relative Intensity VS. Wavelength

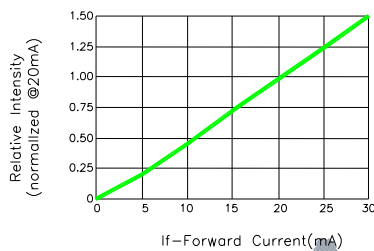


Fig.2-Relative Luminous Intensity vs. Forward Current

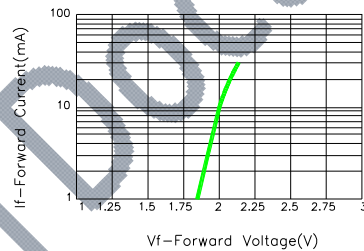


Fig.3-Forward Current vs. Forward Voltage

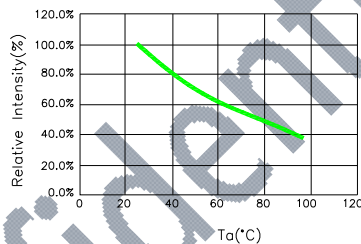


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

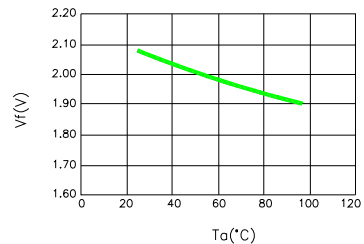


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

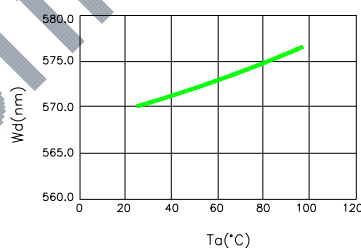


Fig.6-Dominant Wavelength(@20mA)
VS. Ambient Temperature


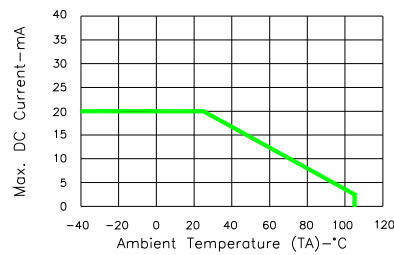


Fig.7-Max. Allowable DC Current
VS. Ambient Temperature

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

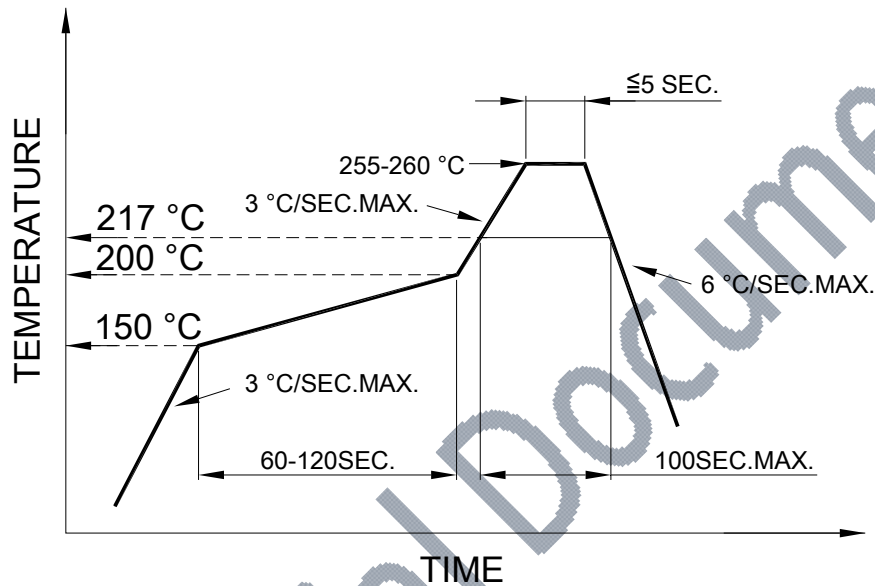

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤4 sec when 260°C. If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of Iron should be smaller Than 15W, and temperature should be controllable. Surface temperature Of the device should be under 230°C.

● REWORK


- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




www.opledtw.com

Opto Plus LED Corp. 0.20" SMD Type LED Display OPS-T2010SYG | OPS-T2011SYG

● REEL DIMENSIONS

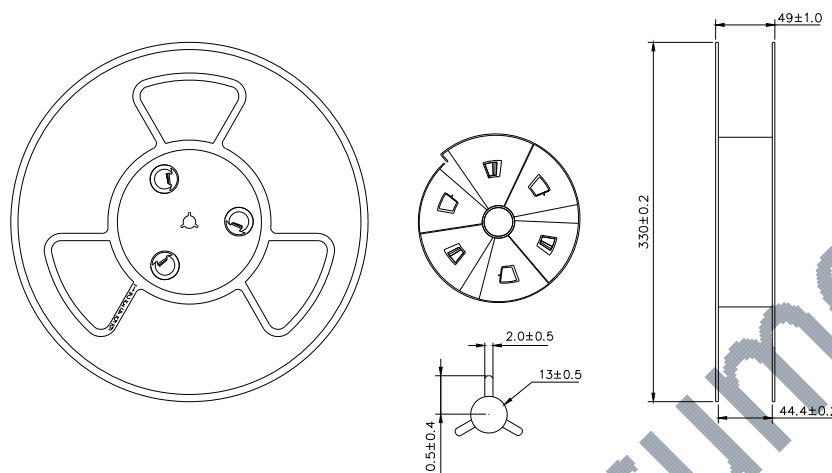

● PACKING & LABEL SPECIFICATIONS

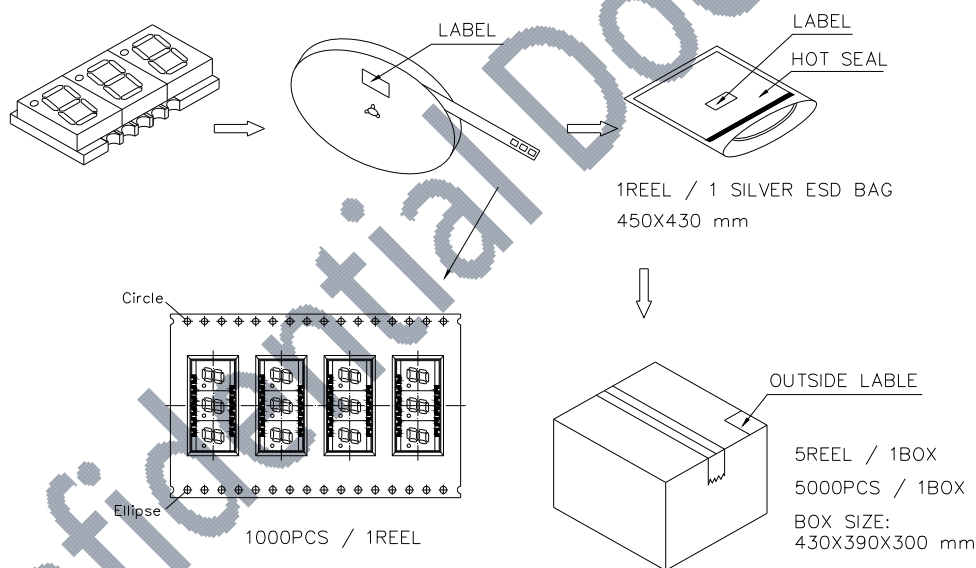

● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)