

Specification for LED Driver Series

AB-D2060-V24-L



Description:

This product is not only cost-effective but also meets the Class II standard for electric shock protection. To improve the safety of the product, open circuit, short circuit, and overload protection functions are added to the circuit. The warranty is 5 years.

Model

Model	Rated Output Voltage	Rated Output Current	Maximum Output Power	Output Voltage Tolerance
AB-D2060-V24-L	24V	0-2.5A	60W	±5%

Naming System:

AB-D2060-V24-L

20: IP20

60: 60 Watts

V24: 24 Volts

L: Linear/Long

Input

Parameter	Conditions	Request	Note
Input Voltage	Ta	90-132Vac	--
Input Frequency		50Hz/60Hz	--
Input Current	25°C, rated input voltage, output with maximum rated power	< 0.8A	--
Input Power		< 70W	--
Efficiency		≥ 88%	--
Stand-By Power Consumption	25°C, rated input voltage, output without load	< 0.5W	Average
Inrush Current	25°C, rated input voltage	< 50A	Peak
Power Factor	25°C, rated input voltage, output with maximum rated power	≥ 0.95	--

Output

Parameter	Conditions	Request	Note
Startup time	25°C, rated input voltage, output with maximum rated power	< 1s	--
Output Voltage and Precision	Ta, Rated Input Voltage	12V±5%	--
Output Current Range	Ta, Rated Input Voltage	0-2.5A	60W
Output Voltage Wave	25°C, rated input voltage, output with maximum rated power	500mV	Vp-p
Output Overload	25°C, rated input voltage, output with 2 LED Load	Yes	--
Output Current and Precision	Ta, Rated Input Voltage, output with rated power	--	--
Rated Output Voltage Range	Ta, Rated Input Voltage	--	--
Output Current Wave	25°C, rated input voltage, output with maximum rated power	--	Ip-p
Dimming Mode	--	--	--
Dimming Range	--	--	--

Protection

Parameter		Conditions	Request
Protection	Open Circuit	Ta, rated input voltage, no load	--
	Overload	Ta, 0.94-1.06 times of input voltage 2 times of rated	Yes
	Short Circuit	Ta, 0.94-1.06 times of input voltage	Yes
	Over Temperature	Ta, 0.94-1.06 times of input voltage, temperature detected point more than 115 degree	Yes
	Over Voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	Yes
	Auto Recovery	Overload, short circuit, and over heat revocation	Yes
	Latch Off	Over voltage re-start after cut off	Yes

Temperature and Others

Parameters	Conditions	Request
Operating Temperature	--	-20-45°C
Relative Humidity	--	45%-85%
Maximum Case Temperature	--	80°C
Lifetime	Max. Ta, rated input voltage, output with max. rated power	30,000 hrs
Working Noise	25°C, rated input voltage, output with rated power, mute box background noise <35dB, pickup 10cm distance from products	Yes


Mechanical, Mounting

Items	Conditions
Case Material and Size	Plastic Case 304.6x30x16.7mm
Mounting Ways	Independent
Insulation Type	Class II
IP Grade	IP20
Input Cables dimension	SPT-2 18AWG
Output Cables Dimension	SPT-2 18AWG
Output Cables Length	Max. 2M

Safety & Standards

Items	Conditions
Safety	UL8750
Harmonic	--
EMI	FCC Part 15 Class B
EMS	--

Mechanical Specification (Unit: mm)

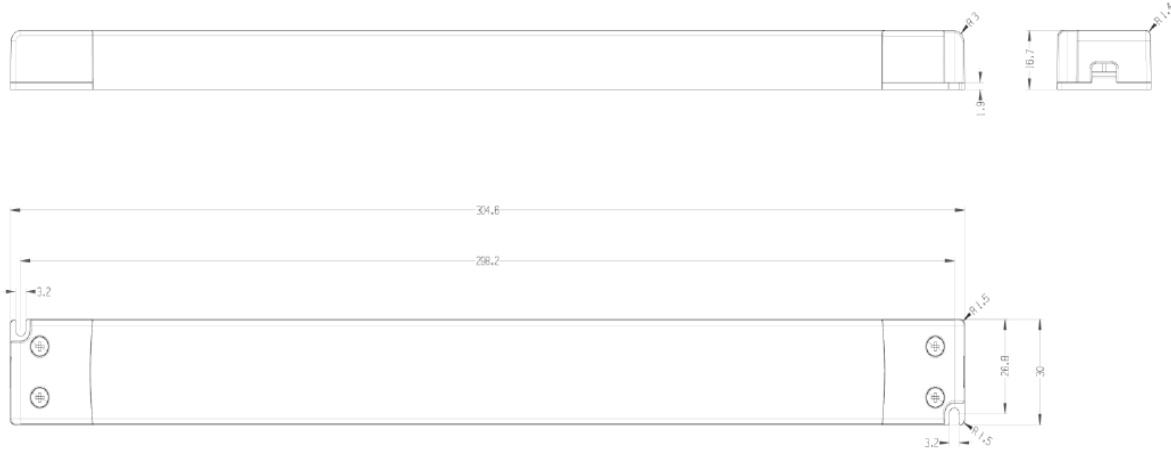

Wiring Diagram

