

Article No. : 6SL3230-2YH38-1AF0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :



Figure similar

| Rated data |  |  |
|------------|--|--|
|------------|--|--|

|                    |                           |          |
|--------------------|---------------------------|----------|
| Input              |                           |          |
| Number of phases   | 3 AC                      |          |
| Line voltage       | 500 ... 690 V +10 % -20 % |          |
| Line frequency     | 47 ... 63 Hz              |          |
| Rated voltage      | 690V IEC                  | 600V NEC |
| Rated current (LO) | 50.00 A                   | 50.00 A  |
| Rated current (HO) | 44.40 A                   | 44.40 A  |

|                                     |              |                        |
|-------------------------------------|--------------|------------------------|
| Output                              |              |                        |
| Number of phases                    | 3 AC         |                        |
| Rated voltage                       | 690V IEC     | 600V NEC <sup>1)</sup> |
| Rated power (LO)                    | 45.00 kW     | 50.00 hp               |
| Rated power (HO)                    | 37.00 kW     | 40.00 hp               |
| Rated current (LO)                  | 52.00 A      | 52.00 A                |
| Rated current (HO)                  | 42.00 A      | 42.00 A                |
| Rated current (IN)                  | 54.00 A      |                        |
| Max. output current                 | 71.00 A      |                        |
| Pulse frequency                     | 2 kHz        |                        |
| Output frequency for vector control | 0 ... 200 Hz |                        |
| Output frequency for V/f control    | 0 ... 550 Hz |                        |

|                     |  |
|---------------------|--|
| Overload capability |  |
| Low Overload (LO)   | 110% base load current IL for 60 s in a 300 s cycle time       |
| High Overload (HO)  | 150% x base load current IH for 60 s within a 600 s cycle time |

|                                   |   |
|-----------------------------------|---|
| General tech. specifications      |   |
| Power factor λ                    | 0.90 ... 0.95                             |
| Offset factor cos φ               | 0.99                                      |
| Efficiency η                      | 0.98                                      |
| Sound pressure level (1m)         | 70 dB                                     |
| Power loss <sup>3)</sup>          | 1.120 kW                                  |
| Filter class (integrated)         | RFI suppression filter for Category C2    |
| EMC category (with accessories)   | Category C2                               |
| Safety function "Safe Torque Off" | without SIRIUS device (e.g. via S7-1500F) |

|               |                       |
|---------------|-----------------------|
| Communication |                       |
| Communication | PROFINET, EtherNet/IP |

| Inputs / outputs |  |
|------------------|--|
|------------------|--|

|                         |       |
|-------------------------|-------|
| Standard digital inputs |       |
| Number                  | 6     |
| Switching level: 0 → 1  | 11 V  |
| Switching level: 1 → 0  | 5 V   |
| Max. inrush current     | 15 mA |

|                          |   |
|--------------------------|---|
| Fail-safe digital inputs |   |
| Number                   | 1 |

|                                    |                |
|------------------------------------|----------------|
| Digital outputs                    |                |
| Number as relay changeover contact | 2              |
| Output (resistive load)            | DC 30 V, 5.0 A |
| Number as transistor               | 0              |

|                         |                        |
|-------------------------|------------------------|
| Analog / digital inputs |                        |
| Number                  | 2 (Differential input) |
| Resolution              | 10 bit                 |

|                                      |       |
|--------------------------------------|-------|
| Switching threshold as digital input |       |
| 0 → 1                                | 4 V   |
| 1 → 0                                | 1.6 V |

|                |                         |
|----------------|-------------------------|
| Analog outputs |                         |
| Number         | 1 (Non-isolated output) |

|   |  |
|---|--|
| PTC/ KTY interface  |  |
| 1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy ±5 °C |  |

| Closed-loop control techniques |  |
|--------------------------------|--|
|--------------------------------|--|

|   |     |
|---|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC)       | Yes |
| V/f ECO linear / square-law               | Yes |
| Sensorless vector control                 | Yes |
| Vector control, with sensor               | No  |
| Encoderless torque control                | No  |
| Torque control, with encoder              | No  |

Data sheet for SINAMICS G120X


Article No. : 6SL3230-2YH38-1AF0

| Ambient conditions          |  |
|-----------------------------|--|
| Standard board coating type | Class 3C3, according to IEC 60721-3-3: 2002                    |
| Cooling                     | Air cooling using an integrated fan                            |
| Cooling air requirement     | 0.083 m³/s (2.931 ft³/s)                                       |
| Installation altitude       | 1,000 m (3,280.84 ft)  |
| Ambient temperature         |  |
| Operation                   | -20 ... 45 °C (-4 ... 113 °F)                                  |
| Transport                   | -40 ... 70 °C (-40 ... 158 °F)                                 |
| Storage                     | -25 ... 55 °C (-13 ... 131 °F)                                 |
| Relative humidity           |  |
| Max. operation              | 95 % At 40 °C (104 °F), condensation and icing not permissible |

| Connections                    |   |
|--------------------------------|---|
| Signal cable                   |   |
| Conductor cross-section        | 0.15 ... 1.50 mm² (AWG 24 ... AWG 16)   |
| Line side                      |   |
| Version                        | screw-type terminal                     |
| Conductor cross-section        | 25.00 ... 70.00 mm² (AWG 6 ... AWG 3/0) |
| Motor end                      |   |
| Version                        | Screw-type terminals                    |
| Conductor cross-section        | 25.00 ... 70.00 mm² (AWG 6 ... AWG 3/0) |
| DC link (for braking resistor) |   |
| PE connection                  | Screw-type terminals                    |
| Max. motor cable length        |   |
| Shielded                       | 100 m (328.08 ft)                       |

| Mechanical data           |   |
|---------------------------|---|
| Degree of protection      | IP20 / UL open type   |
| Frame size                | FSE   |
| Net weight                | 18.3 kg (40.34 lb)  |
| Dimensions                |   |
| Width                     | 275 mm (10.83 in)   |
| Height                    | 551 mm (21.69 in)   |
| Depth                     | 248 mm (9.76 in)  |
| Standards                 |   |
| Compliance with standards | UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH        |
| CE marking                | EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC |

| Converter losses to IEC61800-9-2*                    |        |
|--|--------|
| Efficiency class                                     | IE2    |
| Comparison with the reference converter (90% / 100%) | 38.1 % |

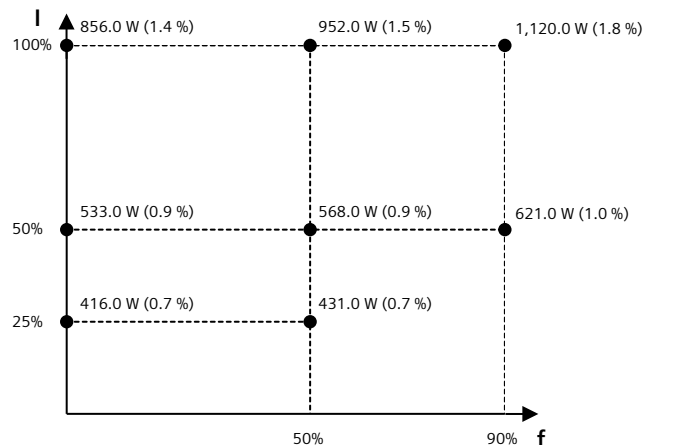

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 550V-600V  
<sup>3)</sup>Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.



Data sheet for SINAMICS G120X

Article No. : 6SL3230-2YH38-1AF0

|  |                                |
|--|--------------------------------|
| Operator panel: Basic Operator Panel (BOP-2) |                                |
| Screen                                       |                                |
| Display design                               | LCD, monochrome                |
| Mechanical data                              |                                |
| Degree of protection                         | IP55 / UL type 12              |
| Net weight                                   | 0.140 kg (0.31 lb)             |
| Dimensions                                   |                                |
| Width  | 70.00 mm (2.76 in)             |
| Height                                       | 106.85 mm (4.21 in)            |
| Depth  | 19.60 mm (0.77 in)             |
| Ambient conditions                           |                                |
| Ambient temperature                          |                                |
| Operation                                    | 0 ... 50 °C (32 ... 122 °F)    |
| Storage                                      | -40 ... 70 °C (-40 ... 158 °F) |
| Transport                                    | -40 ... 70 °C (-40 ... 158 °F) |
| Relative humidity at 25°C during             |                                |
| Max. operation                               | 95 %                           |
| Approvals                                    |                                |
| Certificate of suitability                   | CE, cULus, EAC, KCC, RCM       |

## Data sheet for SINAMICS G120X

Article No. : 6SL3230-2YH38-1AF0

### I/O Extension Module

#### Inputs / outputs

##### Digital inputs

|  |  |
|--|--|
| Number of digital inputs <sup>1)</sup> | 2  |
| Conductor cross-section                | 0.5 ... 1.5 mm <sup>2</sup> (AWG 21 ... AWG 16)<br>Alternatively 2 x 0.5 mm <sup>2</sup> |
| Input voltage (0→1)                    | 11 V   |
| Input voltage (1→0)                    | 5 V  |
| Input voltage, max.                    | 30 V   |

##### Digital outputs

|                              |                              |
|------------------------------|------------------------------|
| Number of digital outputs    | 4                            |
| Conductor cross-section      | 1.5 mm <sup>2</sup> (AWG 16) |
| Output current <sup>2)</sup> | 2 A                          |

##### Analog inputs

|                                       |  |
|---------------------------------------|--|
| Number of analog inputs <sup>3)</sup> | 2  |
| Conductor cross-section               | 0.5 ... 1.5 mm <sup>2</sup> (AWG 21 ... AWG 16)<br>alternatively 2*0.5 mm <sup>2</sup> |
| Current                               | 0 ... 20 mA  |

##### Analog outputs

|                                      |  |
|--------------------------------------|--|
| Number of analog outputs             | 2  |
| Type of analog outputs <sup>4)</sup> | Non-isolated output  |
| Conductor cross-section              | 0.5 ... 1.5 mm <sup>2</sup> (AWG 21 ... AWG 16)<br>Alternatively 2 x 0.5 mm <sup>2</sup> |
| Output voltage                       | 0 ... 10 V   |
| Output current                       | 0 ... 20 mA  |

#### Mechanical data

##### Dimensions

|        |                  |
|--------|------------------|
| Width  | 71 mm (2.80 in)  |
| Height | 117 mm (4.61 in) |
| Depth  | 27 mm (1.06 in)  |

<sup>1)</sup>DI 6: digital input; DI 7: P or M switch; DI COM: Input for Control Unit interface (24 V out, max. 250 mA)

<sup>2)</sup>The max. current depends on the temperature and the size of the connected converted. It varies between 2 A and 3 A at 30 V DC.

<sup>3)</sup>2 analog inputs for the connection of Pt1000/Ni1000 temperature sensors. One of which can be optionally used as analog input.

<sup>4)</sup>Switchable between voltage (0 ... 10 V) and current (0 ... 20 mA) using a parameter