


FED. MFG. CODE 91929


CATALOG LISTING

822EN57-6

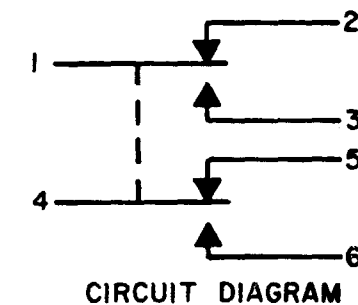

-ROLLER MAY BE LOCKED IN INCREMENTS OF 45° AZIMUTH 

—(6) NO. 20 WIRE LEAD PER MIL-W-22759/7 MARKED
WITH CIRCUIT IDENTIFICATION AND WIRE GAGE
(1-20, 2-20, ETC) PER MIL-W-5088

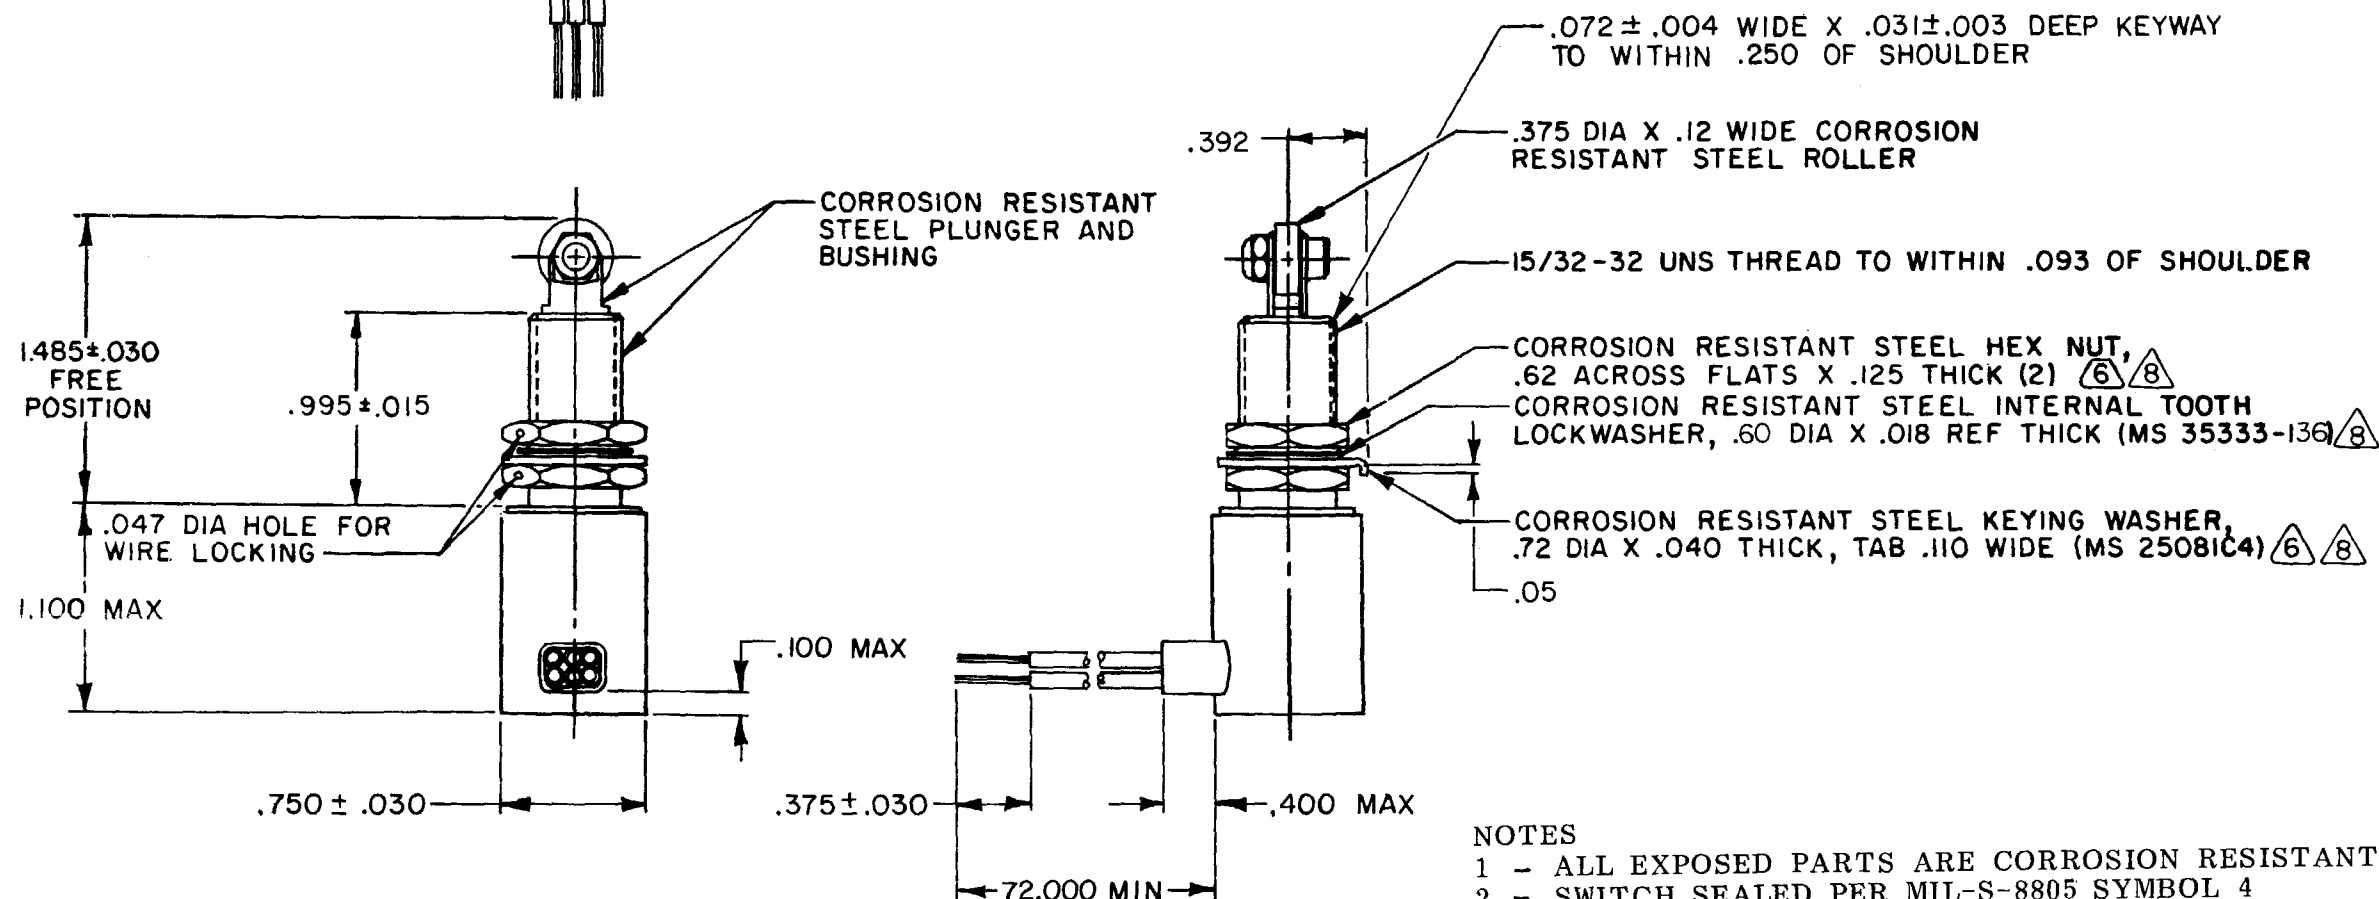

NOTES

- NOTES
- 1 - ALL EXPOSED PARTS ARE CORROSION RESISTANT
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
 - 3 - CATALOG LISTING AND CIRCUIT IDENTIFICATION PERMANENTLY MARKED ON SIDE OF SWITCH
 - 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS:
.010 OF PLUNGER TRAVEL
 - 5 - TO ADJUST ROLLER DIRECTION, REMOVE LOCK NUT, SCREW AND ROLLER. DEPRESS PLUNGER UNTIL IT CAN BE ROTATED TO DESIRED POSITION. RETURN PLUNGER TO FREE POSITION AND REASSEMBLE ROLLER
 - 6 - REPLACEMENT MOUNTING HARDWARE PACKET 19PA9
 - 7 - NOTED ELECTRICAL RATINGS APPLY AS SPECIFIED IN MIL-S-8805/43 UP TO 185°F
 - 8 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE ----- 3-6 LB		CONTACT ARRANGEMENT	
FULL OVERTRAVEL FORCE --- 17 LB MAX		S P D T (2)	
RELEASE FORCE ----- 2 LB MIN		28 VDC	
PRETRAVEL ----- .040 MAX		LOAD	
DIFFERENTIAL TRAVEL ----- .020 MAX			
OVERTRAVEL ----- .125 MIN		SEA LEVEL	50,000 FT.
		RES	7
		IND	2.5
		MOTOR	
		LAMP	

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES


APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/0.04		
ONE PLACE	X,X	0.4/0.18	X,X	0.8/0.3
TWO PLACES	X,X,X	0.15/0.006	X,X,X	0.38/0.015
THREE PLACES			X,X,X,X	0.13/0.005
ANGLES				

DESIGN UNITS ☐ SI METRIC ☐

US CUSTOMARY

THIRD ANGLE PROJECTION



WEIGHT 9.5 OZ MAX

822EN57-6

CATALOG LISTING

PAGE 1 OF 1

W

00

REVISIONS

A **CO44351**

W J M

23 JUN 80
160438Z

B CO 47373
PART 4

R J H
18 AUG 80

C 0048806

D J W

25 SEPT 81

D CO 5737C

15 MAY 85

E C092667

AK

6 MAR 98

FORMTEK

--	--

100

z

DRAW

100