SIEMENS

Data sheet

3SU1000-1CD10-0AA0



Mushroom pushbutton, 22 mm, round, plastic, black, 60 mm, momentary contact type

product brand name	SIRIUS ACT
product designation	Mushroom pushbuttons
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Plastic, black, 22 mm
Enclosure	
number of command points	1
Actuator	
principle of operation of the actuating element	momentary contact type
product extension optional light source	No
color of the actuating element	black
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	60 mm
number of switching positions	2
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	plastic
color of the front ring	black
General technical data	
product function	
 EMERGENCY OFF function 	No
EMERGENCY OFF function EMERGENCY STOP function	No No
EMERGENCY STOP function	No
EMERGENCY STOP function protection class IP	No IP66, IP67, IP69(IP69K)
EMERGENCY STOP function protection class IP degree of protection NEMA rating	No IP66, IP67, IP69(IP69K)
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27 for railway applications according to EN 61373	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance e according to IEC 60068-2-27 e for railway applications according to EN 61373 vibration resistance	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27 for railway applications according to EN 61373 vibration resistance according to IEC 60068-2-6	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27 for railway applications according to EN 61373 vibration resistance according to IEC 60068-2-6 for railway applications according to EN 61373 operating frequency maximum mechanical service life (operating cycles) typical	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27 ofor railway applications according to EN 61373 vibration resistance according to IEC 60068-2-6 ofor railway applications according to EN 61373 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000 S
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27 for railway applications according to EN 61373 vibration resistance according to IEC 60068-2-6 for railway applications according to EN 61373 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date)	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27 for railway applications according to EN 61373 vibration resistance according to IEC 60068-2-6 for railway applications according to EN 61373 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000 S
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27 for railway applications according to EN 61373 vibration resistance according to IEC 60068-2-6 for railway applications according to EN 61373 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date)	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000 S
EMERGENCY STOP function protection class IP degree of protection NEMA rating shock resistance according to IEC 60068-2-27 ofor railway applications according to EN 61373 vibration resistance according to IEC 60068-2-6 ofor railway applications according to EN 61373 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000 S

environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with	relative air humidity of 10 95%)			
Installation/ mounting/ dimensions					
height	60 mm				
width	60 mm				
shape of the installation opening	round				
mounting diameter	22.3 mm				
positive tolerance of installation diameter	0.4 mm				
mounting height	27.5 mm				
installation width	60 mm				
installation depth	24.4 mm				
Certificates/ approvals					
General Product Approval		Declaration of Conformity			













Test Certificates		Marine / Shipping			
Special Test Certific- ate	Type Test Certific- ates/Test Report	ABS	Lloyds Register us	PRS	RINA
other	Environment				

Confirmation

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1000-1CD10-0AA0

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1000-1CD10-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1000-1CD10-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1000-1CD10-0AA0&lang=en

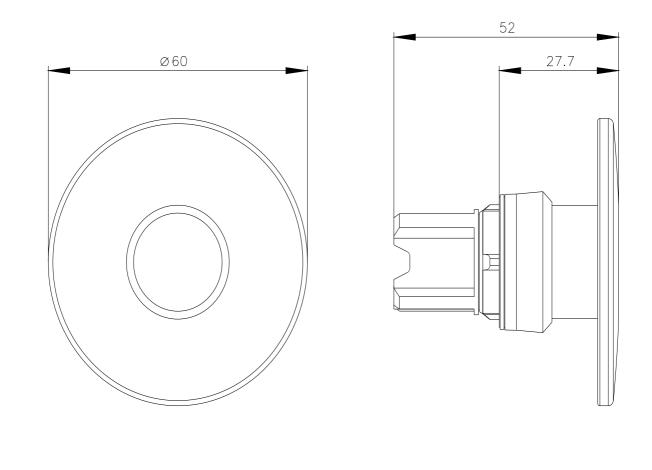

last modified:

