


770-20010 UNIT:MM

REVISION INFORMATION



Rev.	Rev. Date	Modified By	Brief Description
A/0	18-10-12	T1011A	NEW DRAWING
A/1	18-10-23	B1020A	Increase mold number
A/2	19-12-13	B1213A	Increase B、C、D、E、F

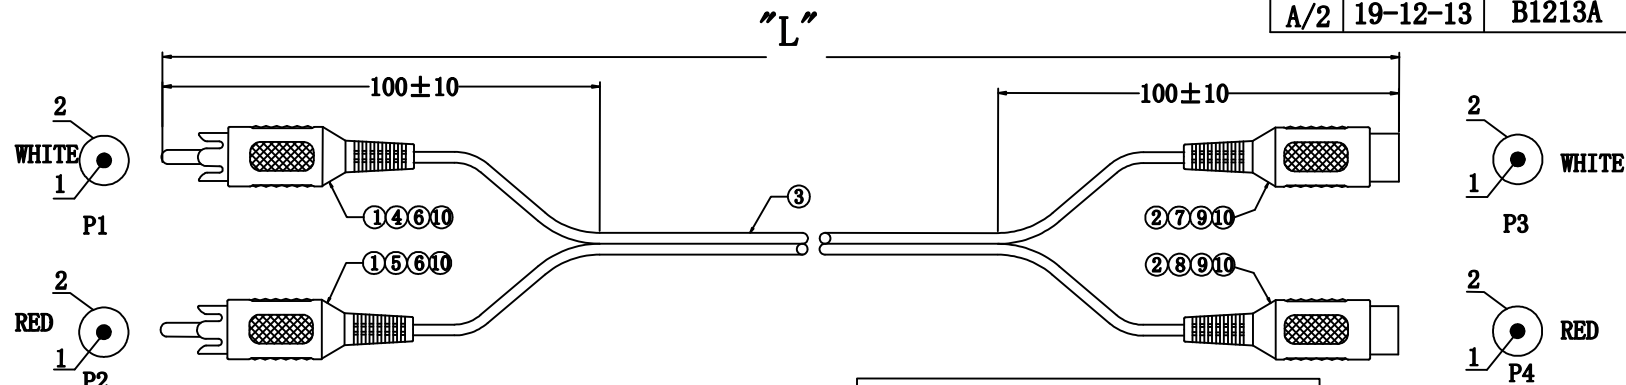

PART NO	DRAWING NO	WIRE LENGTH "L"	BUYER COLOR	VENDOR COLOR	CUT LENGTH
770-20010-00050	671-526-A	500±15		BLACK	500-505MM
770-20010-00100	671-526-B	1000±15		BLACK	1000-1010MM
770-20010-00150	671-526-C	1500±15		BLACK	1500-1515MM
770-20010-00200	671-526-D	2000±15		BLACK	2000-2020MM
770-20010-00250	671-526-E	2500±25		BLACK	2505-2520MM
770-20010-00500	671-526-F	5000±50		BLACK	5010-5020MM

Electrical test:

1. 100% short, open, miswire test
2. Conduct resistance: 5 Ohm (max)
3. Insulation resistance: 5 Mohm (min)
4. dielectric test: DC 300V

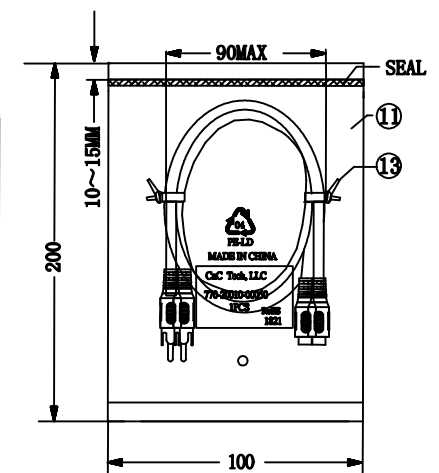

IPC/PE BAG

13	TIE	2	BLACK L=90MM
12	PE BAG	1/10	CLEAR SIZE: 230*300*0.05mm PRINT BLACK "MADE IN CHINA" + "1PCS"
11	PE BAG	1	CLEAR SIZE: 100*200*0.05mm PRINT BLACK "MADE IN CHINA" + "1PC"
10	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10MM
9	IN JACKET	3.2g	CLEAR LD-PE (Mould NO. : RCF-51-1-1)
8	OUT JACKET	6.6g	PVC-55P RED (R1-064) (Mould NO. RCF-1-X-1)
7	OUT JACKET	6.6g	PVC-55P WHITE (W-166) (Mould NO. RCF-1-X-1)
6	IN JACKET	3.2g	CLEAR LD-PE (Mould NO. : NM-006)
5	OUT JACKET	6.6g	PVC-55P RED (R1-064) (Mould NO. WM-009)
4	OUT JACKET	6.6g	PVC-55P WHITE (W-166) (Mould NO. WM-009)
3	CABLE	1	NOUL 28# (0.12/7+30/0.12) *2F JACKET BLACK OD2.8*5.6mm
2	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR: BROWN
1	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR: BROWN
NO.	NAME	QTY	SPECIFICATION

CnC Tech, LLC
Industrial Cable and Connector Technology

DRAWN BY:	DATE: 2019/12/13	DESCRIPTION: 2F CABLE RCA/M*2+RCA/F*2
CHECKED BY:	SHEET 1 of 1	ITEM NO. As above
APPROVED BY:	SCALE 1:1	REV. A/2 UNIT: mm