


```


XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

```

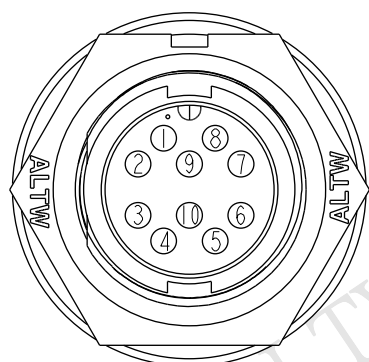

Pin Assignments

Front View



Recommended Panel Cut-Out

10	Orange	橙
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

Note:

- *  Important Dimensions To Check
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 26#*10C+D+Al/My,UV, PVC Jacket, Black, OD=6.0mm
- *  Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
- *  Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
- *  Cable Length Tolerance: 1M:±40mm
2M~5M:±60mm
6M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT: mm		
TOLERANCE		
$\pm 0.5 \text{ mm}$		

TITLE		Standard	
Cable Lock 10Pin M Conn M Pin			
SCALE	3:2	SIZE	A4
REV.	D	SHEET	1 OF 1
	WC-REV.	A.1	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2016-05-13
DWG NO	CHECKED BY	DATE
BU-10PMMM-LL7AXX	Rita	2016-05-13
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016-05-13