


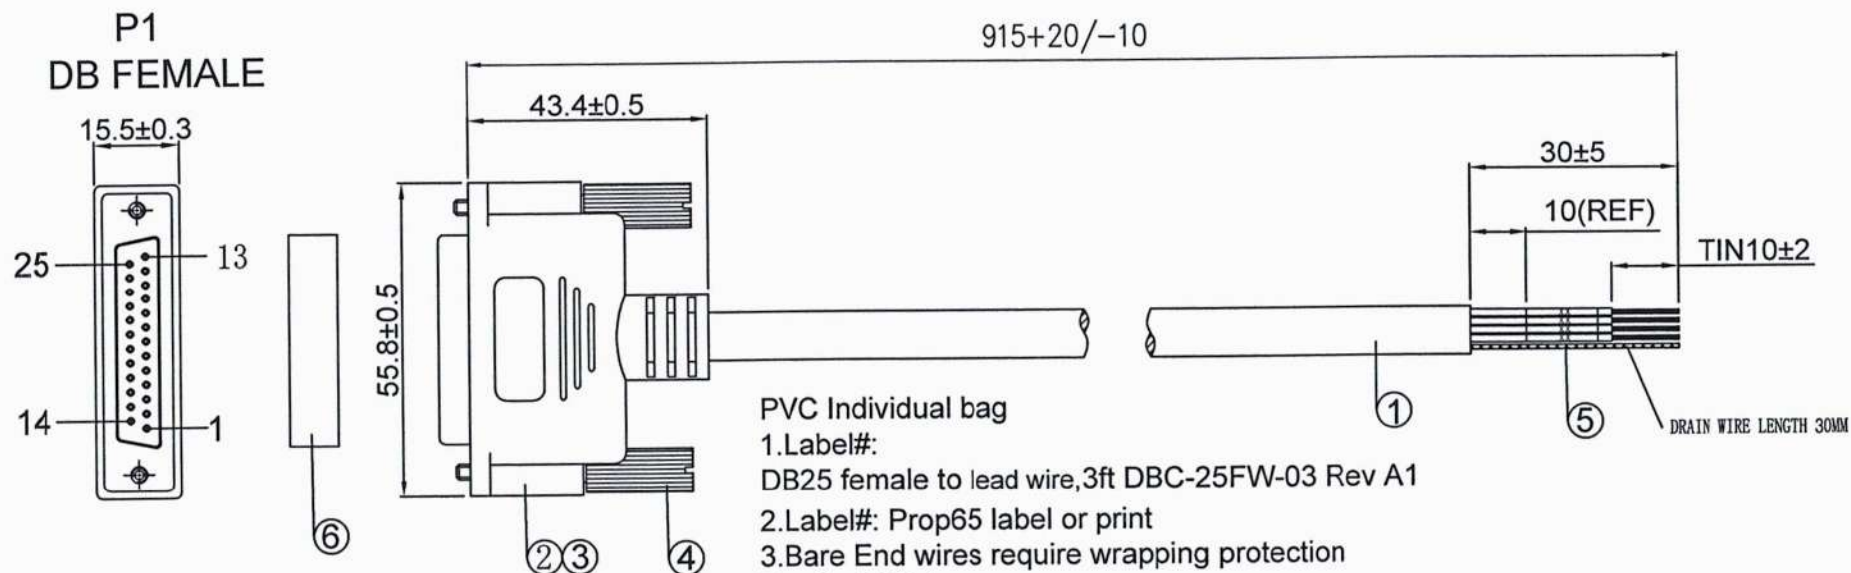

PVC Individual bag

1.Label#:

DB25 female to lead wire,3ft DBC-25FW-03 Rev A1

2.Label#: Prop65 label or print

3.Bare End wires require wrapping protection

Bundle PVC bag

1.Per 10 pcs individuals packed together

Label#: DBC-25FW-03 10 pcs YYWW(date code)

PINOUT:

SPEC:

1. UL 2464 28AWG*25C+DRAIN+AL JACKET BLACK IN COLOR OD:6.5mm
2. DB 25P FEMALE TYPE BLACK COLOR SHELL NICKEL PLATED
3. MOLDING PVC(UL94-V0) BLACK IN COLOR
4. MOLDING SCREW 4-40UNC 4*38.5mm
5. HEAT SHRINK TUBE LABEL WHITE IN COLOR L=15MM
6. DUST CAP

P1 COLOR	LABEL	P1 COLOR	LABEL
1	BLACK	P1	14 BROWN/BLACK
2	BROWN	P2	15 RED/BLACK
3	RED	P3	16 ORANGE/BLACK
4	ORANGE	P4	17 YELLOW/BLACK
5	YELLOW	P5	18 GREEN/BLACK
6	GREEN	P6	19 BLUE/BLACK
7	BLUE	P7	20 PURPLE/BLACK
8	PURPLE	P8	21 GRAY/BLACK
9	GRAY	P9	22 WHITE/BLACK
10	WHITE	P10	23 PINK/BLACK
11	PINK	P11	24 LIGHT GREEN/BLACK
12	LIGHT GREEN	P12	25 LIGHT BLUE/BLACK
13	LIGHT BLUE	P13	Shell DRAIN

REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	SALES	APPROVAL BY	P/N: DBC-25FW-03	Codes	SHEET NO.
A/0			<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>	Model Name: D-Sub DB25 Female RS-232 Serial Cable to Lead Wires 3 FT	KDB312	1/1
			SCALE:	UNIT:MM	DATE: 2024.06.11				

CompuCableUSA