


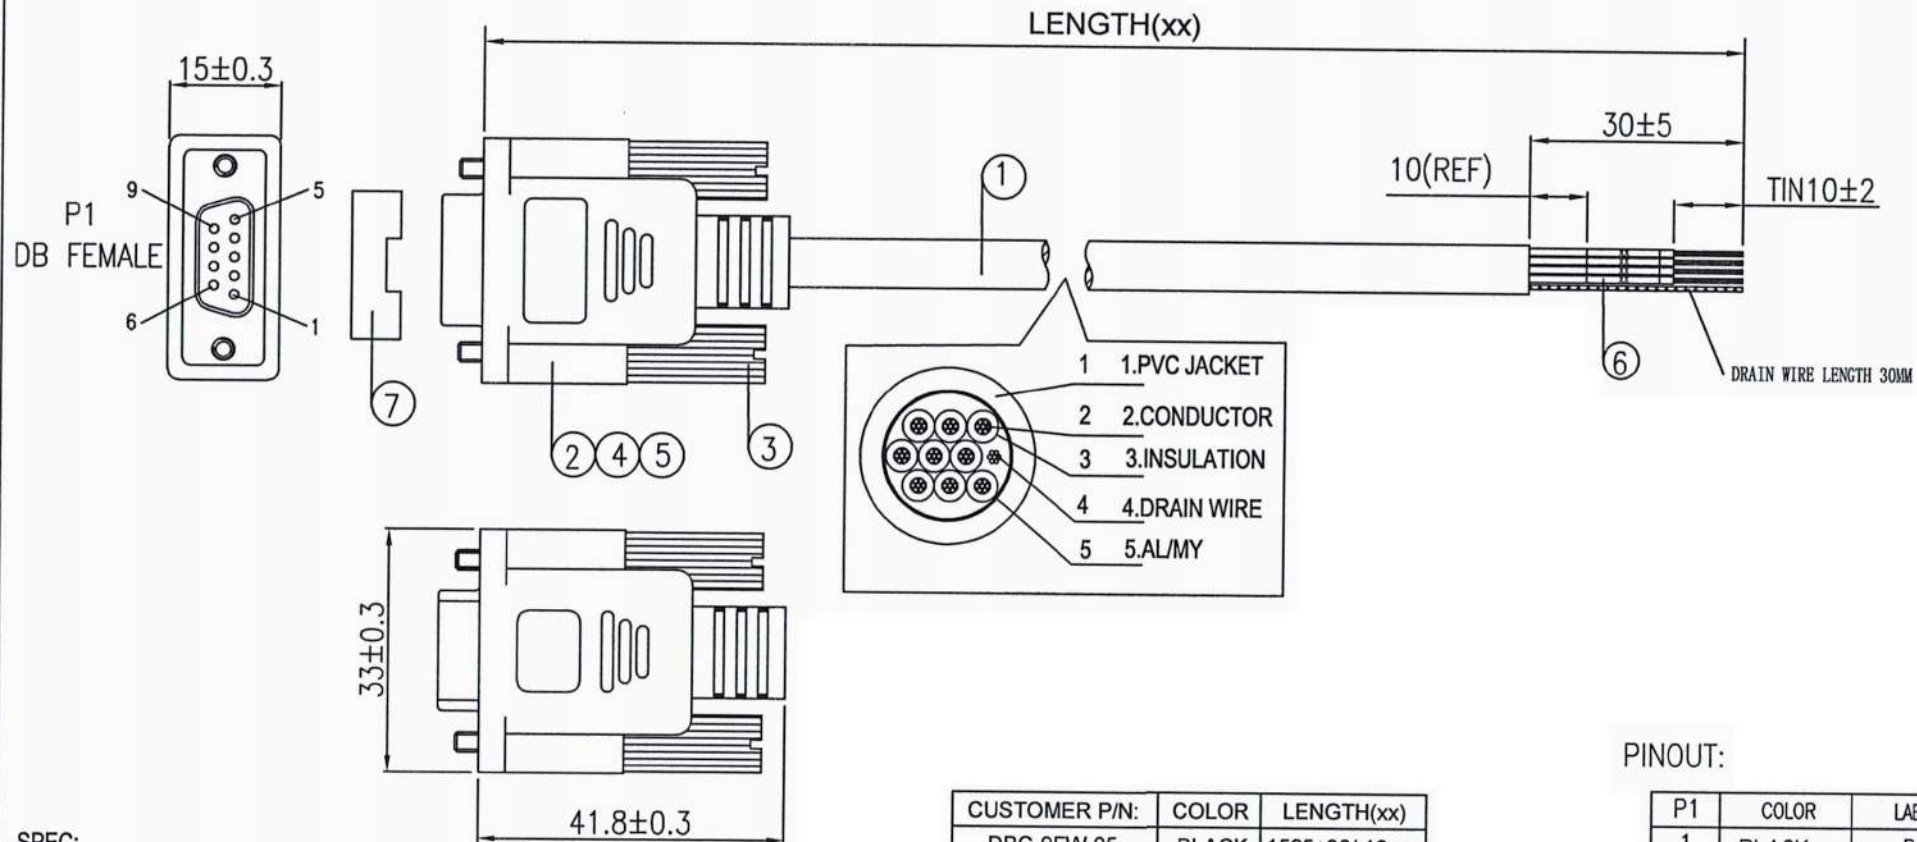

SPEC:

1. CABLE UL 2464 28AWG*9C+DRAIN+AL JACKET BLACK IN COLOR OD:5.0MM
2. CONNECTOR DB 9PIN FEMALE BLACK COLOR SHELL NICKEL PLATED
3. MOLDING SCREW 4-40UNC 4*38.5MM
4. 100%METAL SHELL OF DB 9PIN CONNECTORS
5. MOLDING PVC(UL94-V0) BLACK IN COLOR.
6. HEAT SHRINK TBUE LABEL WHITE IN COLOR L=15MM
6. DUST CAP

CUSTOMER P/N:	COLOR	LENGTH(xx)
DBC-9FW-05	BLACK	1525+30/-10mm
DBC-9FW-10	BLACK	3050+30/-10mm
DBC-9FW-15	BLACK	4575+40/-10mm
DBC-9FW-25	BLACK	7625+80/-10mm
DBC-9FW-35	BLACK	10675+80/-10mm

PINOUT:

P1	COLOR	LABEL
1	BLACK	P1
2	BROWN	P2
3	RED	P3
4	ORANGE	P4
5	YELLOW	P5
6	GREEN	P6
7	BLUE	P7
8	PURPLE	P8
9	GRAY	P9
SHELL	DRAIN	

REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	SALES	APPROVAL BY				SHEET NO.
A/1	2023.03.13		<i>[Signature]</i>	<i>[Signature]</i>	<i>milan</i>	<i>Jim</i>	CompuCable ^{USA}	P/N: DBC-9FW**		1/1
			SCALE:	UNIT:MM	DATE: 2023.03.29					