


P1,P2: M-Y301A
M-301A
P3: M-432A

Customer No:

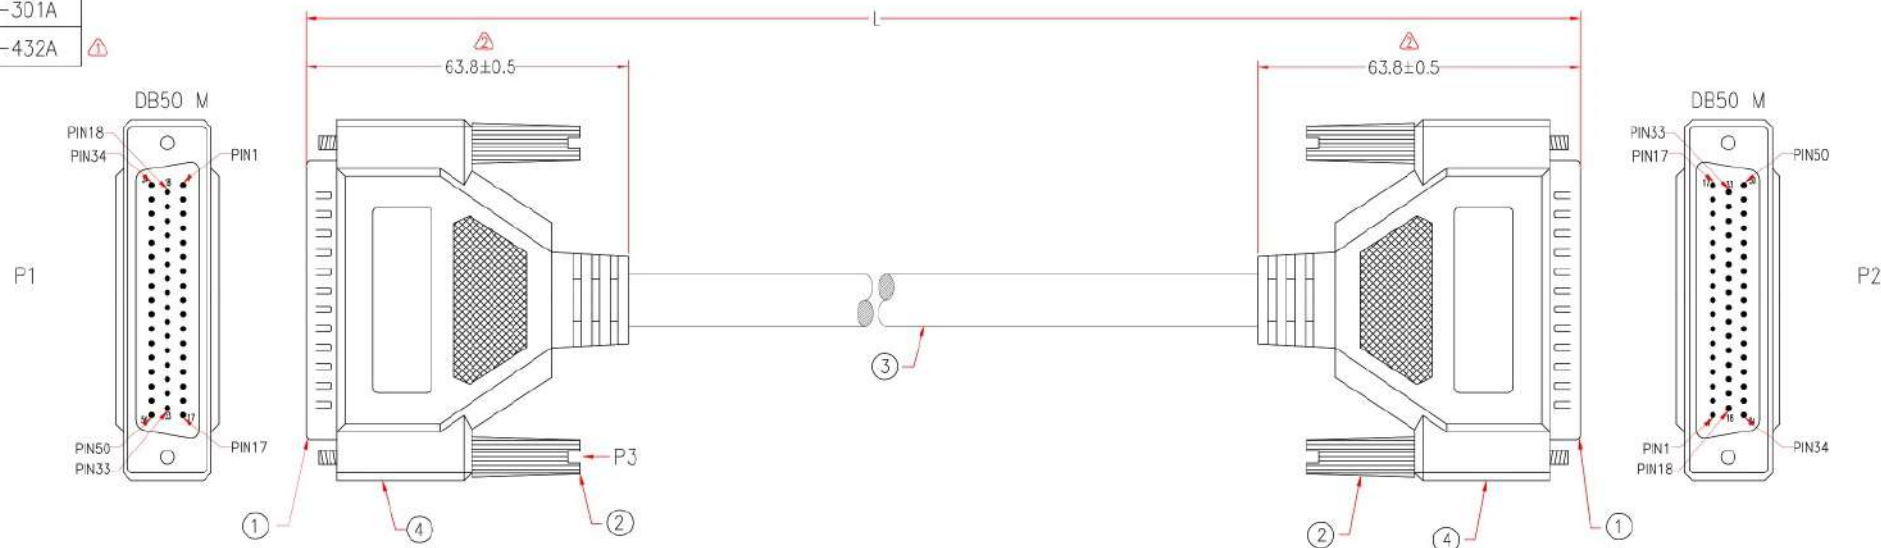

3034

P1	P2		P1	P2	
1	1	BROWN	26	26	LIGHT GREEN/RED
2	2	BROWN/RED	27	27	LIGHT GREEN/WHITE
3	3	BROWN/WHITE	28	28	LIGHT GREEN/BLACK
4	4	BROWN/BLACK	29	29	BLUE
5	5	RED	30	30	BLUE/RED
6	6	RED/WHITE	31	31	BLUE/WHITE
7	7	RED/BLACK	32	32	BLUE/BLACK
8	8	ORANGE	33	33	LIGHT BLUE
9	9	ORANGE/RED	34	34	LIGHT BLU/RED
10	10	ORANGE/WHITE	35	35	LIGHT BLUE/WHITE
11	11	ORANGE/BLACK	36	36	LIGHT BLUE/BLACK
12	12	PINK	37	37	PURPLE
13	13	PINK/RED	38	38	PURPLE/RED
14	14	PINK/WHITE	39	39	PURPLE/WHITE
15	15	PINK/BLACK	40	40	PURPLE/BLACK
16	16	YELLOW	41	41	GRAY
17	17	YELLOW/RED	42	42	GRAY/RED
18	18	YELLOW/WHITE	43	43	GRAY/WHITE
19	19	YELLOW/BLACK	44	44	GRAY/BLACK
20	20	LIGHT YELLOW/RED	45	45	WHITE
21	21	GREEN	46	46	WHITE/RED
22	22	GREEN/RED	47	47	WHITE/BLACK
23	23	GREEN/WHITE	48	48	BLACK
24	24	GREEN/BLACK	49	49	BLACK/RED
25	25	LIGHT GREEN	50	50	BLACK/WHITE
			SHIELD	SHIELD	

△ ★ NOTE: All relevant materials are complied with RoHS directive .

4	BLACK PVC TUBE $\varnothing 3.0 \times 42\text{mm}$	H7A001-0304K09	2	M304
	ALUMINUM FOIL $38 \times 140\text{mm}$ △	A6MA09-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA14-7777		M7777
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
3	NON-UL 50C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 10.0mm, JACKET BEIGE, DRAWING No. EMAL2850C-106	H5BL41-0304B01	Lmm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	A6A30-0095 H1RB01-0304B01	4	M95
1	DB50 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AG02-0108U09	2	M108
No.	DESCRIPTION		Q'TY	Supplier
APPROVED		CompuCableUSA Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm		
CHECKED	HU			
DRAWING	XIAO			
DATE	02/SEP/19	ITEM NO.	DMC-50MM-10B	UNIT:mm

△ REV.2 2019.09.02 MODIFY SCREW MODEL NUMBER & PLUG SIZE, MODIFY ALUMINUM FOIL SIZE

△ REV.1 2011.09.30 ADD RoHS AND INSULATOR COLOR

CHECKED