


## 8.6kW 208/120V 3PH Monitored PDU - LX Interface, Gigabit, 45 Outlets, L21-30P Input, LCD, 3 m Cord, 0U 1.8 m Height, TAA

MODEL NUMBER: PDU3EVN10L2130

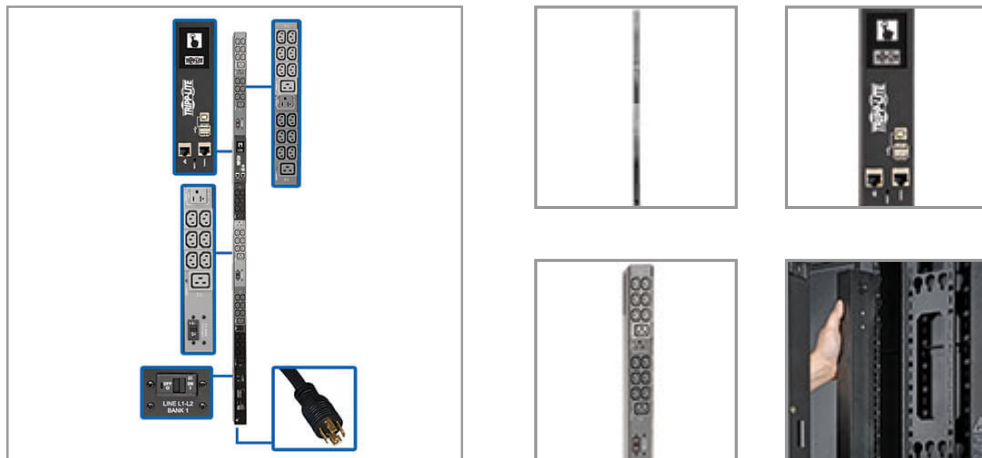

8.6kW L21-30P 3-phase PDU with multi-function touchscreen LCD distributes and monitors AC power. Built-in Java-free network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

### Description

The PDU3EVN10L2130 8.6kW 3-Phase Monitored PDU provides real-time remote monitoring of voltage, frequency and load levels via built-in network connection. These advanced remote capabilities can save you money and reduce downtime.

Recommended for your IT or industrial application, the monitored PDU features 45 outlets—36 C13 (208V), 6 C19 (208V) and 3 NEMA 5-15/20R (120V)—with included plug-lock insert sleeves to prevent cables from becoming accidentally disconnected. A 10-ft. (3.05 m) cord with NEMA L21-30P input plug connects the 3-phase PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A color touchscreen LCD lets you toggle between menus to monitor input current level per phase and output current per load bank with  $\pm 1\%$  billing-grade accuracy, environmental sensor data and network information. It also generates a unique QR code to allow access to the PDU through a mobile device.

### Features

#### Distributes and Monitors Network-Grade AC Power

- 8.6kW 208/120V monitored PDU with 3-phase input
- NEMA L21-30P plug with 10-ft. (3.05 m) cord connects to compatible AC power source
- Firmware upgrades support future product enhancements

#### 45 Outlets Distribute AC Power

- 36 C13 (208V), 6 C19 (208V) and 3 NEMA 5-15/20R (120V) split into 3 separately breakered load banks
- Plug-lock insert sleeves prevent cables from becoming accidentally disconnected

### Highlights

- 8.6kW 208/120V 3-phase 1.8-meter Gigabit Ethernet-capable 0U monitored PDU
- 45 outlets—36 C13, 6 C19, 3 5-15/20R—with plug-lock inserts
- Pre-installed WEBCARDLX with latest version of PADM20 for enhanced remote management
- NEMA L21-30P PDU input with 3 m power cord
- Touchscreen LCD with mobile access option via QR code

### Package Includes

- PDU3EVN10L2130 8.6kW 3-Phase Monitored PDU
- Built-in LX Platform interface
- Configuration cable
- (45) Plug-lock insert sleeves
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



Powering Business Worldwide



#### Color Touchscreen LCD

- Reports network data, including IP address, input current level per phase and output current per load bank with  $\pm 1\%$  billing-grade accuracy
- Generates unique QR code for read-only access to PowerAlert® Device Manager via mobile device
- Full access available by logging into PowerAlert Device Manager via browser as user with read/write credentials

#### Built-In GbE-Capable LX Interface

- Pre-installed WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities
- PADM20 and PowerAlert Element Manager (PAEM) form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations

#### Broad Communications Compatibility

- Supports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP
- Supports automatic and manual assignment of IP address

#### Easy 0U Installation in EIA-Standard 19 in. Racks

- Mounts vertically using included toolless buttons or rack-mounting brackets
- Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

#### TAA-Compliant

- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

## Specifications

OVERVIEW	
UPC Code	037332209443
PDU Type	Monitored
INPUT	
Input Phase	3-Phase
PDU Input Voltage	208
Recommended Electrical Service	Three-phase 30A 208V service
Maximum Input Amps	24
Maximum Input Amps Details	Agency de-rated to 24A continuous
PDU Plug Type	NEMA L21-30P
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
OUTPUT	



Powering Business Worldwide



Output Capacity Details	8.6kW (208V) total capacity; 13.9A max per breakered outlet bank; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacle Details	5-15/20R outlets provide 120V output; C13 and C19 outlets provide 208V output
Output Receptacles	(3) 5-15/20R; (36) C13; (6) C19
Output Nominal Voltage	208/120V
Overload Protection	Three 20A circuit breakers, one per output load bank
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Reported Load Segments	Supports monitoring of input current per phase (L1, L2, L3) and output current for each output load bank (B1-B6); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds black C13/C19 outlets (B1); L2-L3 feeds dark-gray C13/C19 outlets (B2); L3-L1 feeds light-gray C13/C19 outlets (B3); L1-N feeds black 5-20R outlet (B4); L2-N feeds dark-gray 5-20R outlet (B5); L3-N feeds light-gray 5-20R outlet (B6)
Front Panel LCD Display	Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device)
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%
Power Measurement Accuracy (Watts)	+/-1%
<b>SURGE / NOISE SUPPRESSION</b>	
Automatic Shut-Off	No
<b>PHYSICAL</b>	
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	7.09 x 9.65 x 75.87
Shipping Dimensions (hwd / cm)	18.01 x 24.51 x 192.71
Shipping Weight (lbs.)	26.00
Shipping Weight (kg)	11.79
Unit Dimensions (hwd / in.)	70.000 x 2.170 x 2.520
Unit Dimensions (hwd / cm)	177.8 x 5.5 x 6.4
Unit Weight (lbs.)	13.50
Unit Weight (kg)	6.12
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32° to 122°F (0° to 50°C)



Powering Business Worldwide



Storage Temperature Range	-22° to 140°F (-30° to 60°C)
Relative Humidity	5% to 95% non-condensing
Operating Elevation	0-10,000
<b>COMMUNICATIONS</b>	
PowerAlert Software	LX Platform Interface: PowerAlert Device Manager
Communications Cable	USB B-to-USB A Configuration/Console Access cable
Network Monitoring Port	RJ45 Network port, RJ45 Config/Console Access port; 2x USB A ports supports a variety of EnviroSense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules. USB B port (Configuration & Console Access)
SNMP Compatibility	Pre-installed LX platform network interface
Network Compatibility	10 Mbps; 100 Mbps (Fast Ethernet); 1 Gbps (Gigabit)
<b>FEATURES &amp; SPECIFICATIONS</b>	
High Availability PDU Features	Remote Network Notifications
<b>STANDARDS &amp; COMPLIANCE</b>	
Product Certifications	CAN/CSA-C22.2 No. 60950-1 (Canada); NOM (Mexico); UL 60950-1
Product Compliance	RoHS; FCC Part 15 Class A (USA); Trade Agreements Act (TAA)
<b>WARRANTY &amp; SUPPORT</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.