


## TAA-Compliant SNMPWEBCARD for remote monitoring and control via SNMP, Web or telnet

MODEL NUMBER: **SNMPWEBCARDTAA**

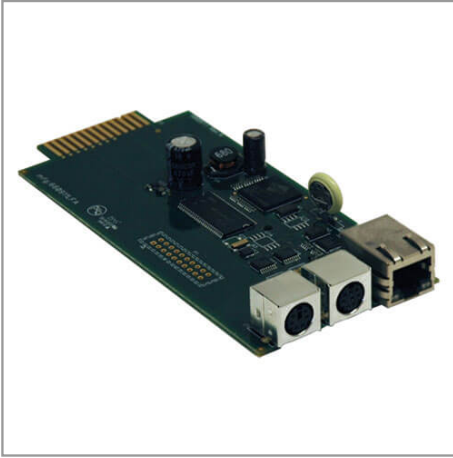

### Description

Tripp Lite's SNMPWEBCARDTAA allows network users to operate any expansion slot-equipped Tripp Lite SmartPro or SmartOnline UPS as a managed device on the network. Enables remote monitoring and control of UPS and site electrical conditions using the SNMP network management platform or a web browser. Provides remote viewing of site electrical data, UPS status information and self-test logs. Supports selective rebooting of locked network equipment without disrupting power to other devices when used with customized load management receptacles available on select Tripp Lite UPS systems. Optional ENVIROSENSE module provides remote temperature/humidity monitoring and a dry contact interface to control and monitor alarm, security and telecom devices. NEW firmware version 12.06.0064 now available! Firmware is not applicable with cards running firmware version 12.04.0047 or earlier. NOTE: Existing 12.04.0048 and 12.04.0049 cards must be upgraded to the 12.04.0055 firmware prior to upgrading to 12.06.0061 and 12.06.0064.

### Features

- NEW firmware web-only version 12.06.0064 now available!
- Graphical User Interface supports Java 1.6 and 1.7 runtime environments
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases
- Makes any slot-equipped Tripp Lite UPS a managed device on the network, controllable using SNMP network management platforms or a web browser
- Web interface provides remote viewing of current site electrical data, UPS self-test and alert logs, as well as logged power events such as blackouts, brownouts, overvoltages, and other electrical problems
- Offers the ability to control UPS output power and remote reboot of locked network devices without interrupting power to other loads when used with any Tripp Lite UPS equipped with load management receptacles
- DHCP/Manual configuration support provides the ability to have network settings automatically assigned to the card, or manually assigned via permanent IP addresses
- 10/100 Mbps auto-sensing allows optimal communication compatibility with your current 10/100 Base-T network
- Real-time clock support maintains the time of day and date even if the UPS is shut down

### Highlights

- NEW firmware version 12.06.0064 now available!
- Supports secure file transfer
- Supports SNMPv3, including SNMPv3 traps
- Java 6 and 7 WebUI support
- Improved performance
- Supports IPv6
- RADIUS Support (FreeRADIUS, TekRADIUS)
- Data and event logs can be setup to automatically send the log via email or HTTP post when the configurable log size (64-2048) is reached
- Enhanced Remote Syslog capability to define if event, data or accounting entries should be sent
- CLI interface that allows control and configuration through a network CLI interface, SSH or Telnet, or through a SNMPWEBCARD's serial configuration port
- Event actions
- Individual outlet events

### System Requirements

- Tripp Lite UPS/PDU with SNMPWEBCARDTAA running Version 12.04.0055
- FTP utility
- Web browser
- Java Runtime Environment 1.6.026 or later
- Firmware is not applicable with cards running firmware version 12.04.0047 or earlier. NOTE: Existing 12.04.0048 and 12.04.0049 cards must be upgraded to the 12.04.0055 firmware prior to upgrading to 12.06.0061 and 12.06.0064.

### Package Includes

- SNMPWEBCARDTAA
- Quick Start Installation Guide
- Configuration Cable
- Software CD including Owner's Manual & MIB files
- Cover Plates (secures card in UPS system's SNMP accessory slot)



Powering Business Worldwide



- NTP (Network Time Protocol) support gives the card the ability to receive automatic updates to its real-time clock from a NTP server
- 2-tier level access allows an administrator and a guest to log into the web browser for monitoring and/or management of slot-equipped Tripp Lite UPS systems
- Multiple user support allows for viewing by a number of users at the same time
- Full Telnet access gives you the ability to remotely monitor and manage your UPS system via a TELNET session
- Optional SSL (Secure Socket Layer) security setting provides the capability to create an encrypted connection to the card via a web browser
- Offers the ability to shut down remote operating systems through your networks. (Supported operating systems must have Power Alert 12 installed. See PowerAlert section for software support)
- Alert notifications via email or SNMP traps give users the added advantage of having an immediate event notification sent to them as a result of a site electrical or UPS problem.
- Protocols supported include HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP, SCP
- RoHS Compliant

## Specifications

OVERVIEW	
UPC Code	037332153548
PHYSICAL	
Shipping Dimensions (hwd / in.)	2.40 x 6.40 x 6.80
Shipping Dimensions (hwd / cm)	6.10 x 16.26 x 17.27
Shipping Weight (lbs.)	0.70
Shipping Weight (kg)	0.32
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	2-year limited warranty

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.