
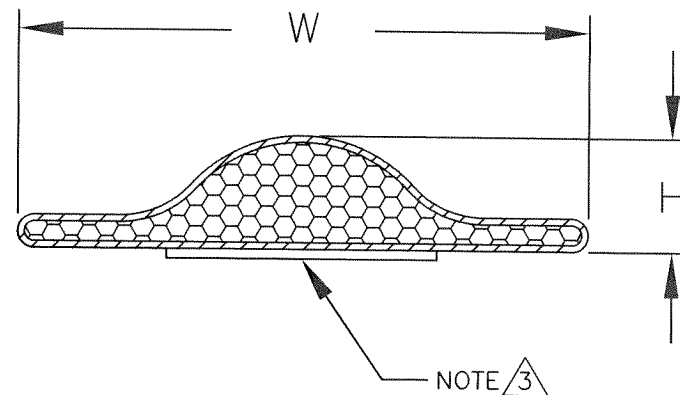


Bell Shapes		Part Number
H	W	
0.080	0.300	2575-1011-1001
0.080	0.450	2575-1011-0194
0.080	0.500	2575-1011-0174
0.080	0.675	2575-1011-0175
0.120	0.600	2575-1011-0195
0.197	0.675	2575-1011-1007
0.250	0.500	2575-1011-1463

REV	DESCRIPTION	DATE	APPR. BY
-	INITIAL RELEASE	10/27/23	K. COSTA

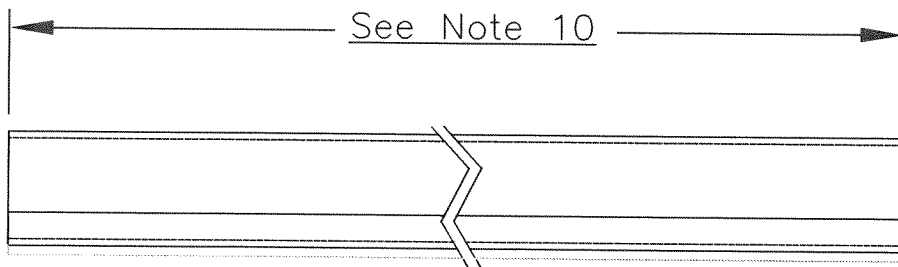

MASTER COPY

WHEN INK IS RED

TEPN: 2575
 ACCEPTED BY: KC
 DATE: 12/1/23

NOTES:

- NOTE 1: POLYURETHANE FOAM CORE.
 NOTE 2: NICKEL PLATING OVER COPPER SUBSTRATE FABRIC.
 NOTE 3: 3M ADHESIVE TRANSFER TAPE 467MP OR EQUIVALENT.
 2 STRIPS STANDARD ON PARTS WIDER THAN .197"
 NOTE 4: FLAMMABILITY RATING UL 94 V-0 RATED.
 NOTE 5: COMPRESSION PERMANENT DEFORMATION ASTM D395 $\leq 20\%$.
 NOTE 6: SURFACE RESISTANCE ASTM F390 ≤ 0.07 OHMS/INCH².
 NOTE 7: WORKING TEMPERATURE WITHOUT PSA: -40C - 120C.
 NOTE 8: WORKING TEMPERATURE WITH PSA: -40C - 90C.
 NOTE 9: UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
 NOTE 10: CONSULT MANUFACTURER FOR AVAILABLE LENGTHS.

FOR ITEM:

MAT'L: SEE NOTES

UNLESS OTHERWISE SPECIFIED
 ALL TOLERANCES TO BE:
 $\leq 0.787 \pm 0.011$
 $0.787 - 1.969 \pm 0.019$
 $1.969 - 3.937 \pm 0.027$
 $3.937 - 19.685 \pm 0.038$
 $19.685 - 39.369 \pm 0.118$
 $> 39.369 \pm 0.315$

TECH|ETCH

TECH-ETCH, INC.
 45 Aldrin Road
 Plymouth MA 02360

FILE: 2575	TOOL NO.:	DRAWN BY:	K. Costa
DATE: 10/27/23	N/A	APPR. BY:	K. Costa
CAT. NO.:	2575-1011-XXXX-XX.XX	SHEET:	1 OF 1
PART NAME	Metalized Fabric Gasket	SCALE:	1:1