



Feb. 2024 Ver. 1.6
TDK Corporation

Multilayer Antenna

For UWB (6200-8300 MHz)


ANT Series 1.6x0.8mm [EIA 0603] TYPE

P/N: **ANT167250ST-1210A1**


ANT167250ST-1210A1

■ SHAPES AND DIMENSIONS

[Top View]

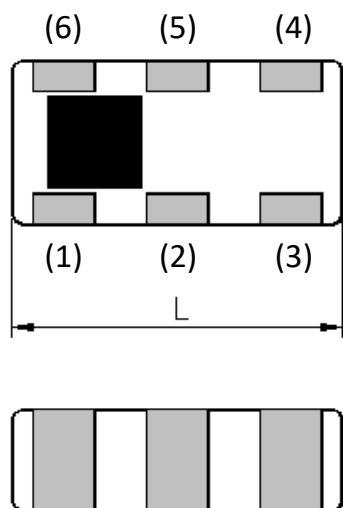

[Bottom View]

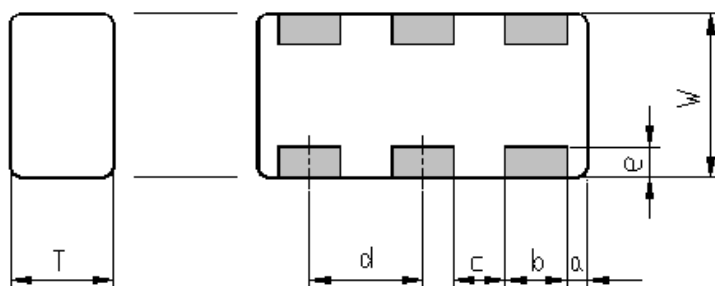

Dimensions (mm)

L	W	T	a	b	c	d	e
1.60	0.80	0.45	0.10	0.30	0.25	0.55	0.15
+/-0.10	+/-0.10	Max	+/-0.10	+/-0.10	+/-0.10	+/-0.10	+/-0.10

Terminal functions

(1)	Dummy pad
(2)	Feed point
(3)	Dummy pad

(4)	Dummy pad
(5)	Radiator electrode
(6)	Dummy pad

■ TERMINATION FINISH

Material
Sn plate

ANT167250ST-1210A1

ELECTRICAL CHARACTERISTICS

(Measurement)

Parameter	Frequency (MHz)	Spec		
		Min.	Typ.	Max.
VSWR	6200 to 8300	-	1.58	2.0
		-		
Antenna Gain (dBi)**	6200 to 8300	-	8.1	-
Polarization		Linear		
PCB Size (mm)		25.5x19		
Antenna keep-out Area (mm)		5.5x4.8		
Characteristic Impedance (ohm)		50 (Nominal)		

* This is typical antenna performance with the standard PCB.

** Reference value

MAXIMUM RATINGS




Parameter	TDK Spec		Conditions
	Min.	Max.	
Operating temperature (°C)	-40 to +85	°C	
Storage temperature (°C)	-40 to +85	°C	
Power Handling (W)	-	1	CW
Human Body Model : HBM @Each Port (V)	-1000	1000	100pF / 1500ohm
Machine Model : MM @Each Port (V)	-150	150	200pF / 0ohm
Charged Device Model : CDM @Each Port (V)	-500	500	Relative humidity : 60%RH max

Ambient temperature : +25+/-5°C

Feb. 2024 Ver. 1.6
TDK Corporation

ANT167250ST-1210A1

FREQUENCY CHARACTERISTICS

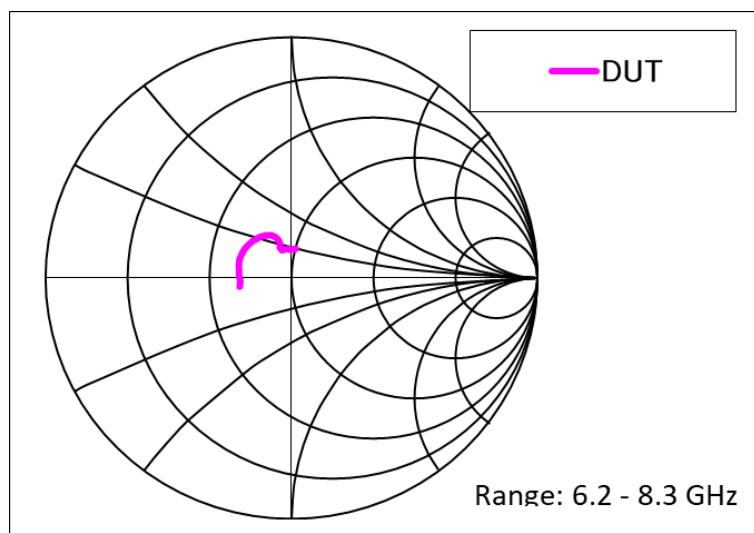
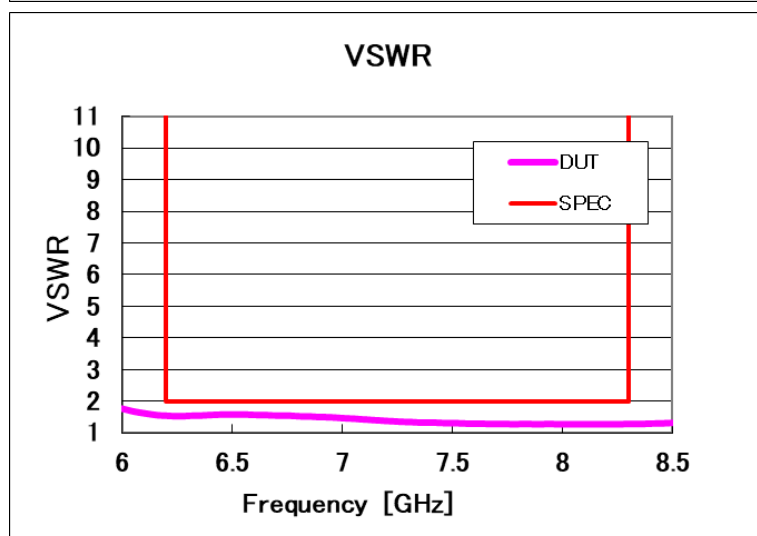
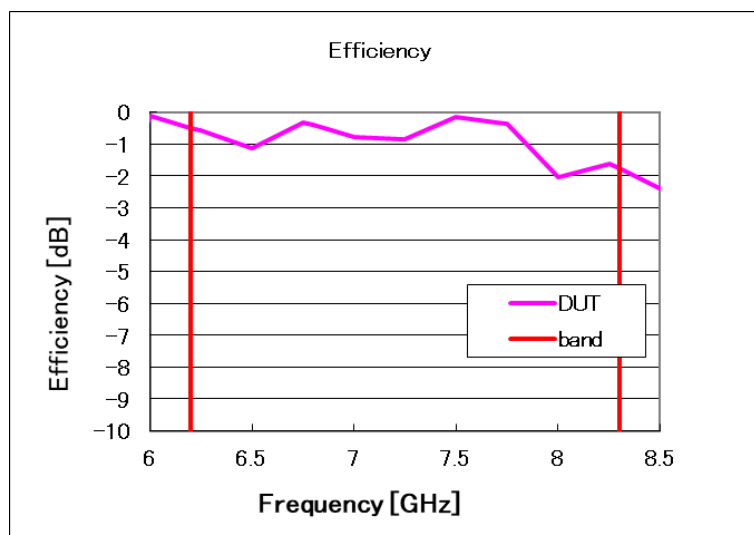


All specifications are subject to change without notice.
Before using these products, be sure to request the delivery specifications.

ANT167250ST-1210A1

FREQUENCY CHARACTERISTICS




UWB Channel 5

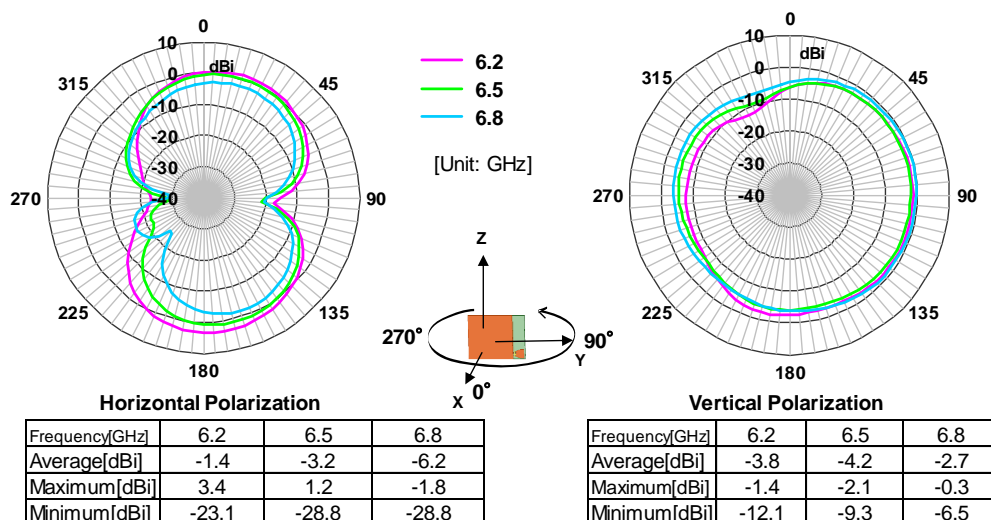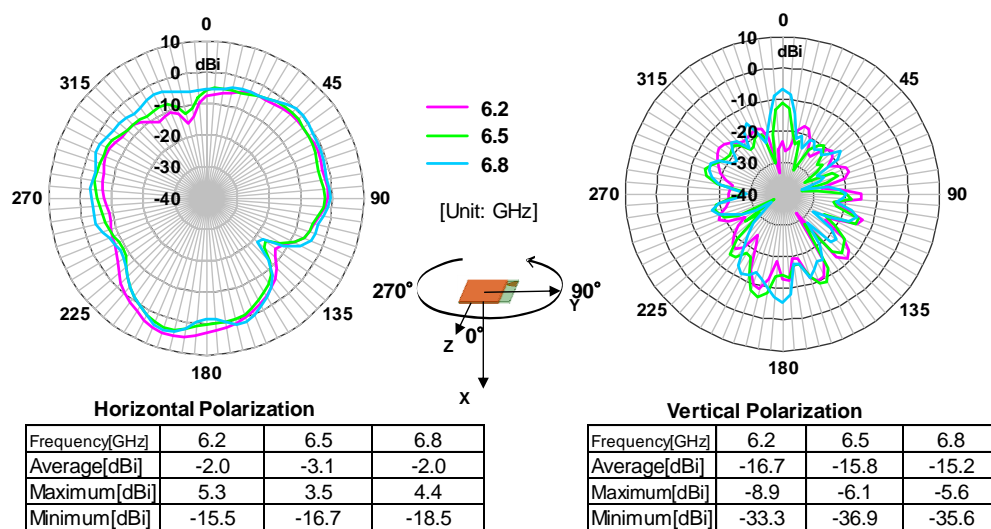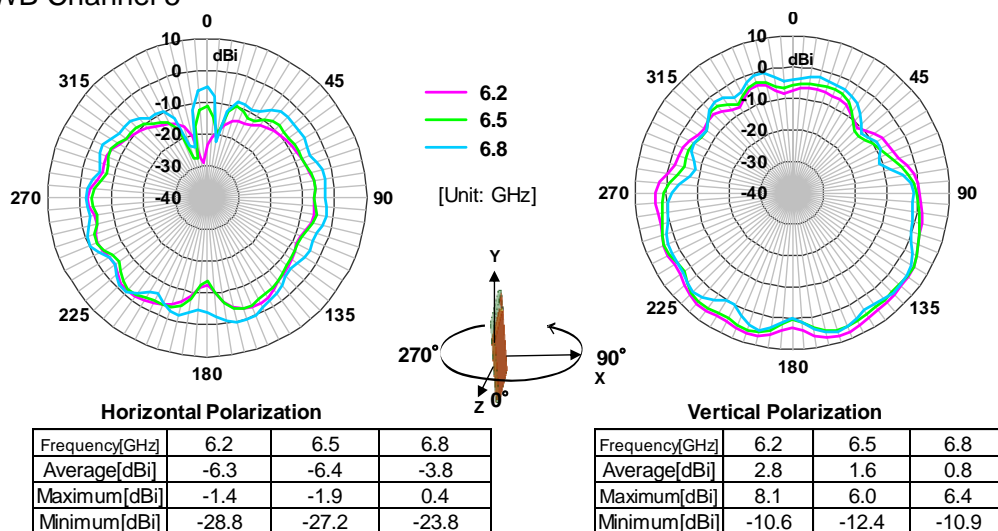

ANT167250ST-1210A1

FREQUENCY CHARACTERISTICS


UWB Channel 9

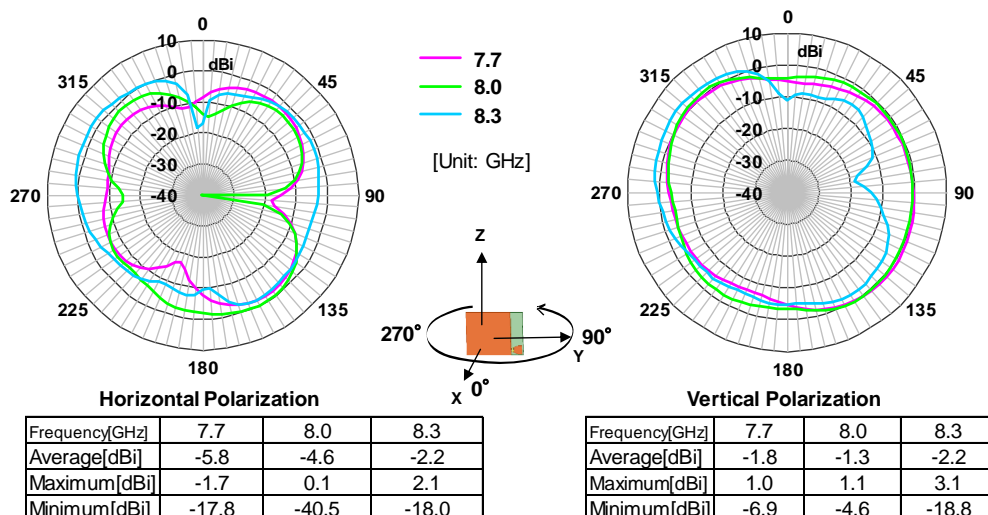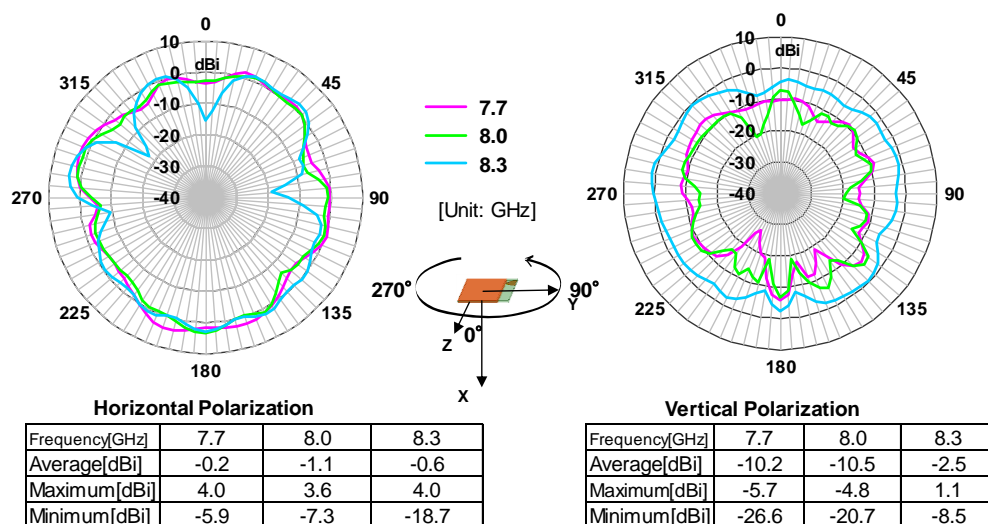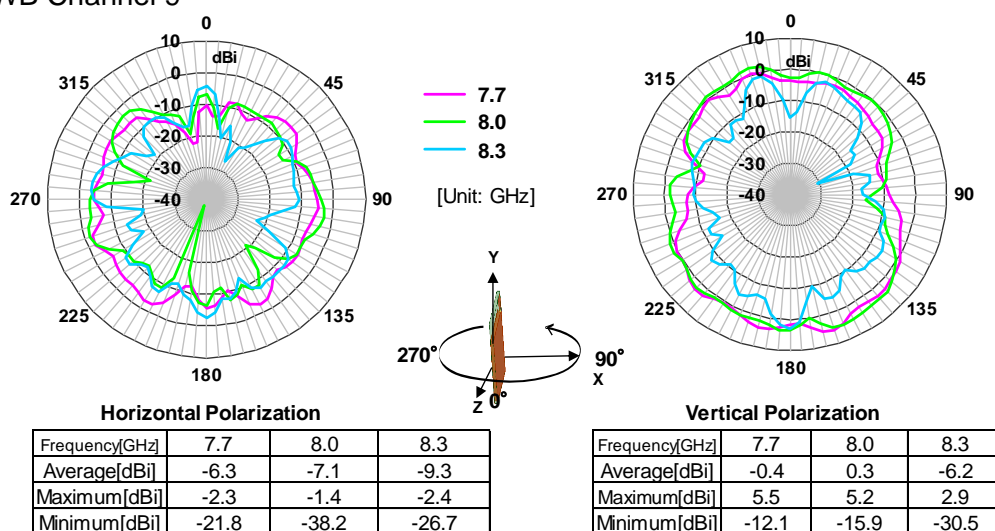

Feb. 2024 Ver. 1.6
TDK Corporation

ANT167250ST-1210A1


■ RECOMMENDED LAND PATTERN

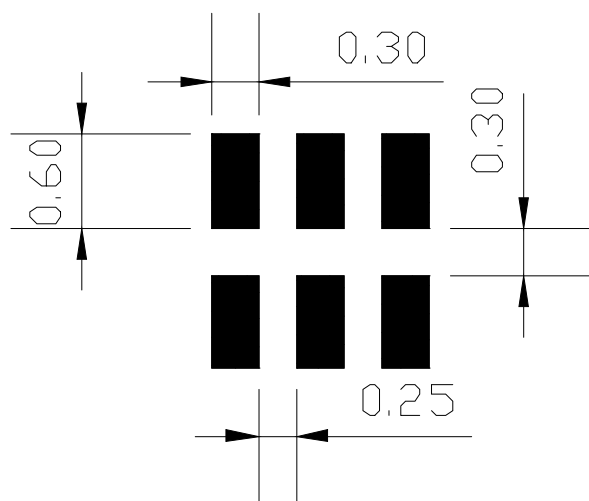

Feb. 2024 Ver. 1.6
TDK Corporation

ANT167250ST-1210A1

EVALUATION BOARD

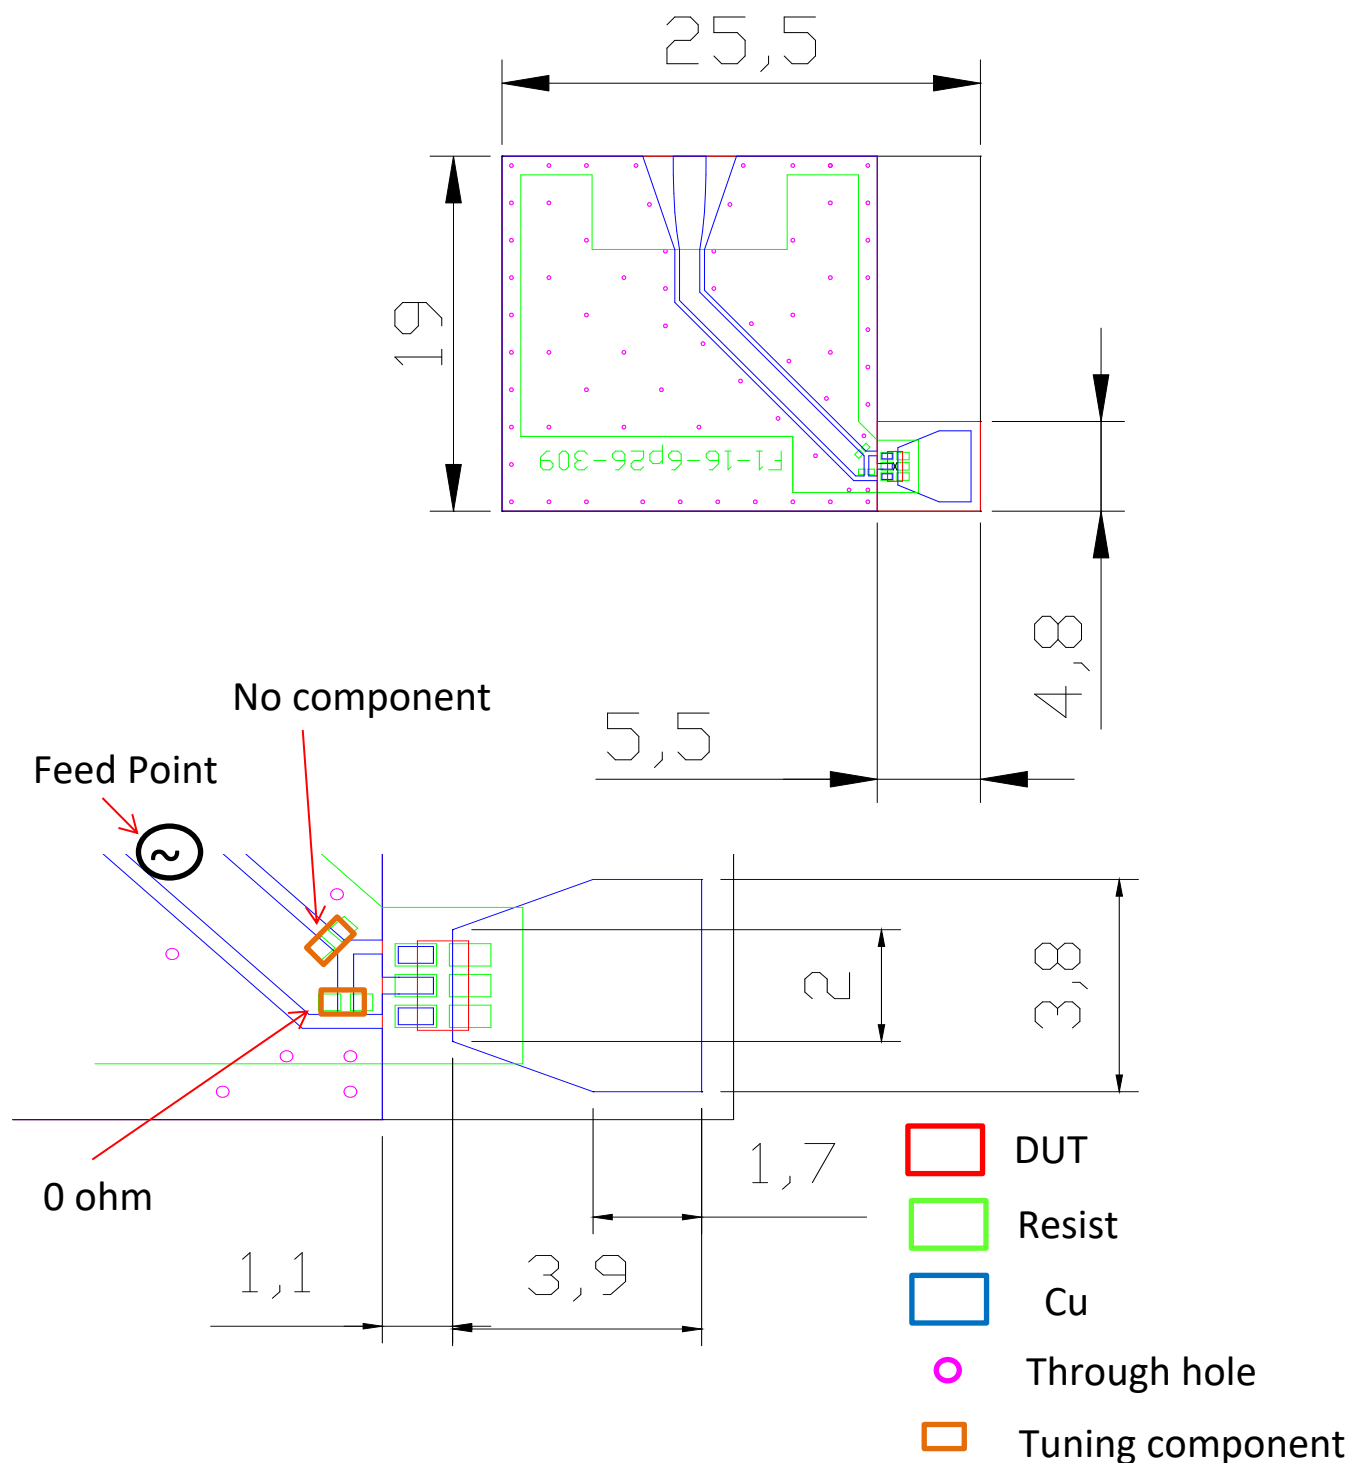


ENVIRONMENT INFORMATION

RoHS Statement
RoHS Compliance

All specifications are subject to change without notice.
Before using these products, be sure to request the delivery specifications.

TDK Corporation

RECOMMENDED REFLOW PROFILE

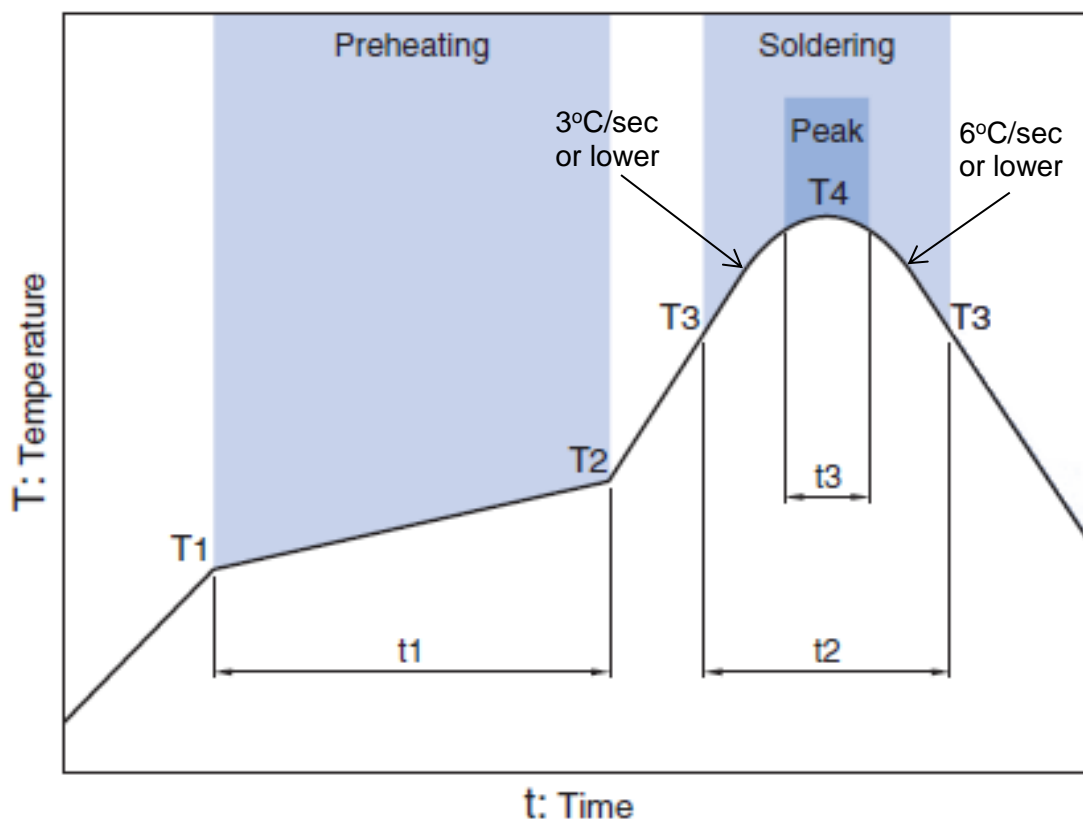

Preheating			Soldering			
			Critical zone (T3 to T4)		Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3 *
150°C	200°C	60 to 120sec	217°C	60 to 120sec	240 to 260°C	30 sec Max


* t3 : Time within 5°C of actual peak temperature

The maximum number of reflow is 3.


Note: Lead free solder is recommended.
Recommended solder is Sn-3.0Ag-0.5Cu. (M705 by Senju Metal Industry)

ANT167250ST-1210A1**■ PACKAGING STYLE**

Reel Dimensions

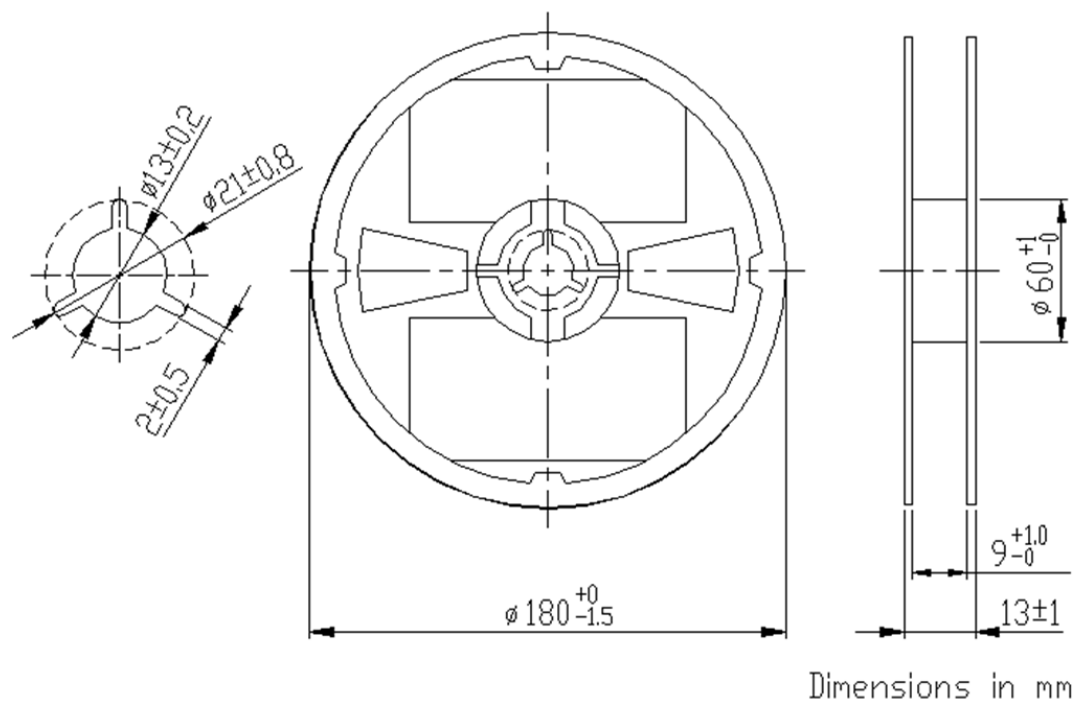

Carrier Tape

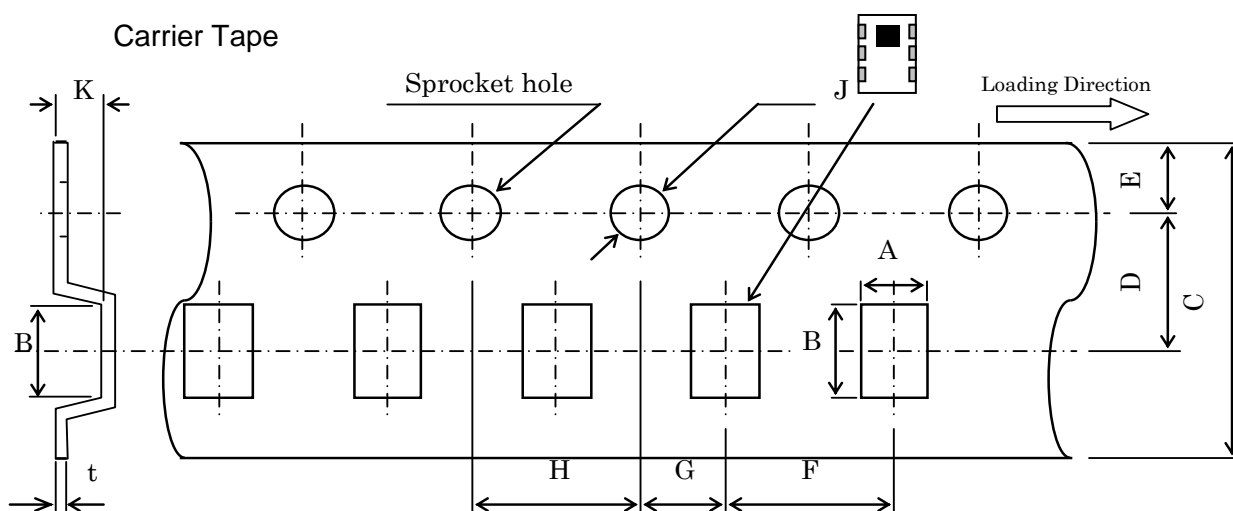

A	B	C	D	E	F	G	H	J	K	t
0.97	1.8	8.0	3.5	1.75	4.0	2.0	4.0	1.5	0.55	0.25
+/-0.05	+/-0.05	+/-0.3	+/-0.05	+/-0.1	+/-0.1	+/-0.05	+/-0.1	+0.1/-0	MAX	+/-0.05

**STANDARD PACKAGE QUANTITY
(pieces/reel)**

4,000

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- | | |
|---|--|
| (1) Aerospace/Aviation equipment | (8) Public information-processing equipment |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (9) Military equipment |
| (3) Medical equipment | (10) Electric heating apparatus, burning equipment |
| (4) Power-generation control equipment | (11) Disaster prevention/crime prevention equipment |
| (5) Atomic energy-related equipment | (12) Safety equipment |
| (6) Seabed equipment | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment | |

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.